LED EMERGENCY BULKHEAD

Data Sheet Documents


-

IP
65

5Y
WAR

CRI
>80


50.000
HOURS

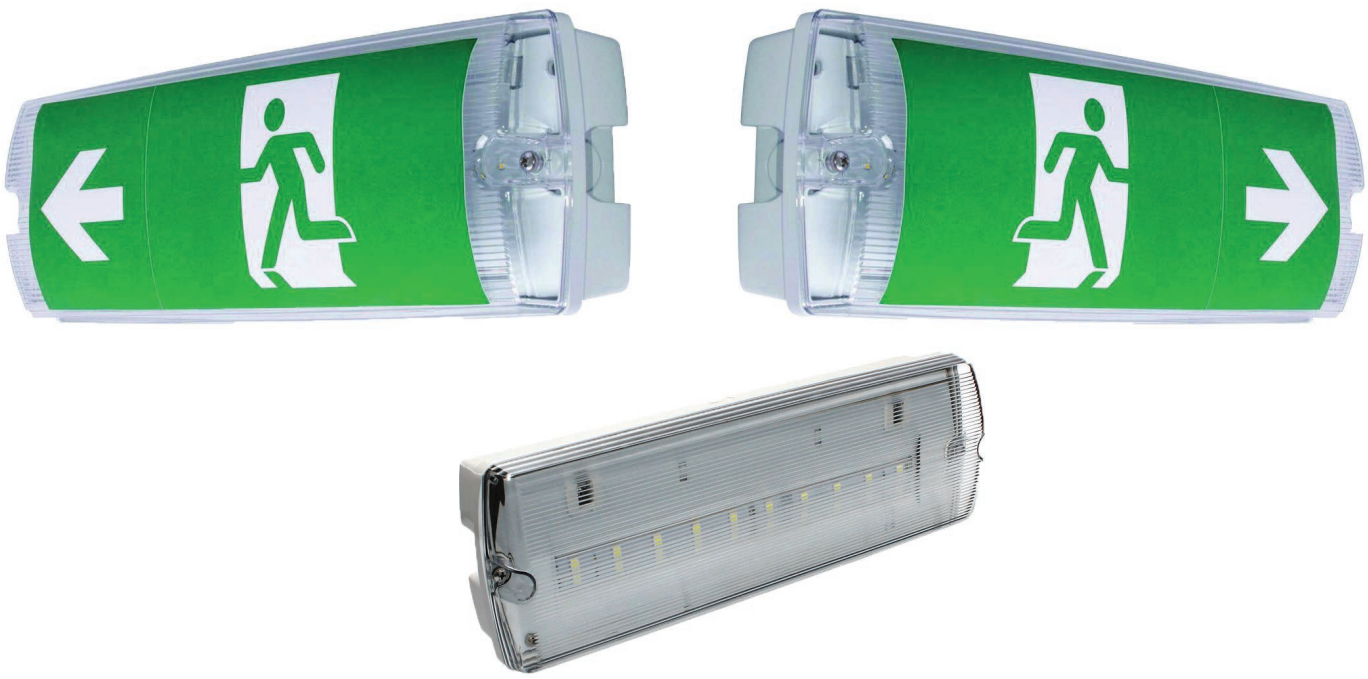




01 | ORDER CODE • NSL-WML-355-4W-SMD-NS-XXK-IP65-EM


02 | DIMENSIONS (MM) • 355X100X55

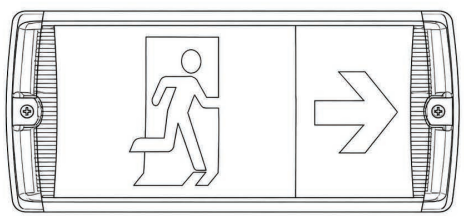

FRONT VIEW



SIDE VIEW

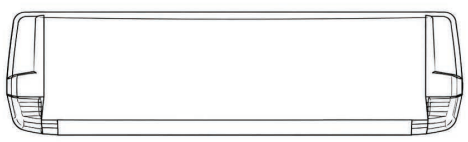

TOP VIEW

03 GENERAL PRODUCT DESCRIPTION

Reliable 4W LED emergency bulkhead combining a high-visibility directional exit sign IP65-rated for indoor and outdoor use, with a built-in battery backup for sustained operation during power failures, CRI >80, rated for 50,000 hours and backed by a 5-year warranty.

04 FEATURES


A powerful emergency area light in one compact, rugged unit — delivering instant, dependable illumination precisely when it matters most.

05 TECHNICAL DATA

Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
CCT	3000-4000-6000
CRI	>80%
Wattage	4 W
LED Type	2835 LED SMD
Materials	aluminuim housing, pc diffuser
Life Time	>50,000 hours
charging time	24H
On Battery time	3H
Visibility distance	24-30 m
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +85˚C
Certifications	CE, SELV
Mounting	Wall Mounted / Surafce Mounted
IP Rating	IP65
IK	08
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	Battery Ni-Cd 3.6V 1500MAH / 3HR
Warranty	5 Years

06 APPLICATIONS

An essential life-safety solution for stairwells, corridors, car parks, warehouses, schools, hospitals, and any commercial or public building.

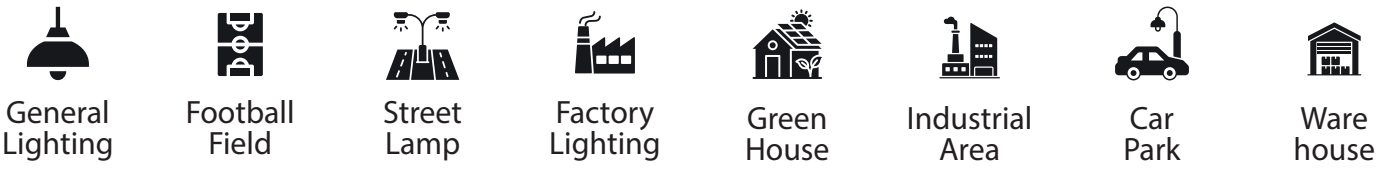

07 PHOTOMETRIC DATA

