LED EXIT LIGHT SIGN SINGLE


Data Sheet Documents

IP
20/44

5Y
WAR

CRI
83%

50.000
HOURS

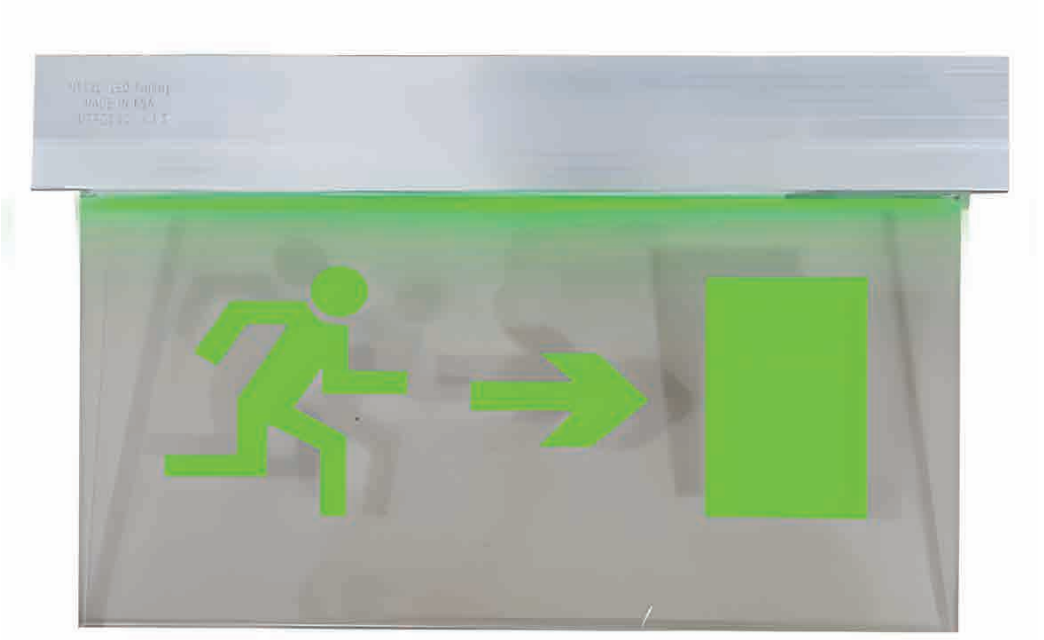



01	ORDER CODE	• NSL-EXIT-S-SM-5W-HIP-DON-DF-IP20
02	DIMENSIONS (MM)	• L33.5 H22
01	ORDER CODE	• NSL-EXIT-S-RE-5W-HIP-DON-DF-IP20
02	DIMENSIONS (MM)	• L33.5 H22
01	ORDER CODE	• NSL-EXIT-S-WM-5W-HIP-DON-DF-IP20
02	DIMENSIONS (MM)	• L33.5 H22
01	ORDER CODE	• NSL-EXIT-S-SM-5W-HIP-DON-DF-IP44
02	DIMENSIONS (MM)	• L33.5 H22
01	ORDER CODE	• NSL-EXIT-S-RE-5W-HIP-DON-DF-IP44
02	DIMENSIONS (MM)	• L33.5 H22
01	ORDER CODE	• NSL-EXIT-S-WM-5W-HIP-DON-DF-IP44
02	DIMENSIONS (MM)	• L33.5 H22

03 GENERAL PRODUCT DESCRIPTION

Reliable LED exit sign with a crisp, high-visibility green illuminated panel and a slim brushed aluminum housing designed for clear, instant directional guidance in any emergency situation. IP-44/20rated, CRI >83 for sharp, accurate symbol clarity, rated for 50,000 hours and backed by a -5year warranty.

04 FEATURES

High-visibility green illuminated panel with a guaranteed 30 meter viewing distance ensuring clear emergency directional guidance even in the most challenging evacuation conditions.
Maintained type operation for continuous illumination with a reliable -3hour battery backup that keeps the sign fully lit during power failures.

05 TECHNICAL DATA

Input Voltage	230-240 VAC
Frequency	50/60 Hz
CCT	Green
CRI	83%
Wattage	5 W
VIEW DISTANCE	24-30 m
CHARGING TIME	24 H
DISCHARGING TIME	3 H
LED Type	Epistar High Power
Materials	Aluminum, PC, & Friendly material
Beam Angle	180˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV and ISO
Mounting	Pendant , Wall Mounted
IP Rating	IP20/44
Dimmable	No
Emergency	Yes
Warranty	5 Years

06 APPLICATIONS

Essential for offices, hotels, hospitals, shopping malls, schools, and any commercial or public building.



07 PHOTOMETRIC DATA