

LED ALUSTRIPE 14.5

Data Sheet Document.

IP
65

5Y
WAR

14.5 W

CRI
>80

50.000
HOURS









01 ORDER CODE

02 DIMENSIONS (MM)

- NSL-ALSTR-GL-14.5W/M-XXK-SMD-IP65
- 1000*15*9

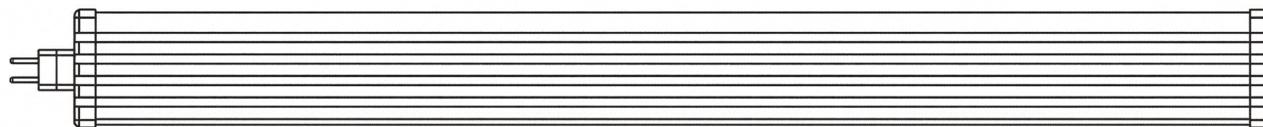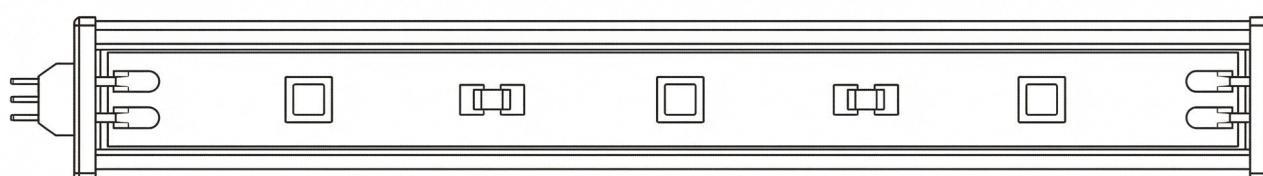

03 **GENERAL PRODUCT DESCRIPTION** LED strip within an aluminum profile offering a 160° beam angle, excellent efficiency, and environmental resistance. Suitable for concealed installations and glass wall highlights

04 **FEATURES**

- The products used as pure light source, using LED technology human and environment friendly, no PB, Hg nor UV.
- High power saving fixture, no decay and color temperature shift.
- Can be dimmable (through direct control or via network).

05	TECHNICAL DATA	Input Voltage	24 VDC
		CCT	3000K, 4000K, 5000K, 6000K, RGB
		CRI	>80%
		LED Efficiency	110Lm/W
		Power Supply	Tridonic / Nassli
		LED Type	Osram / Bridgelux
		Materials	Aluminum, PC, & Friendly material
		Beam Angle	160°
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +65°C
		Certifications	CE, SELV, SASO
		Mounting	Wall Mounted, Hidden
		IP Rating	IP65
		Dimmable	On Request
		Emergency	On Request
		Warranty	5 Years

06 **APPLICATIONS** It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room, Factories, Theater, Cinemas, Kitchens and Corridor etc...



General Lighting



Football Field



Street Lamp



Factory Lighting



Green House



Industrial Area



Car Park



Ware house

07 **PHOTOMETRIC DATA**