

# LED BULKHEAD EXIT LIGHT

Data Sheet Document.

IP  
20

5Y  
WAR

20-47 W

CRI  
>80

50.000  
HOURS







01 ORDER CODE

02 DIMENSIONS (MM)

- NSL-PL-DIND-6060-40W-XXK-SMD-NS-IP20
- W600XL600xD101

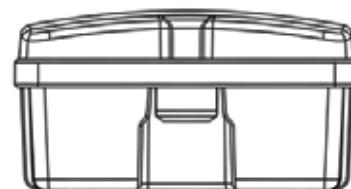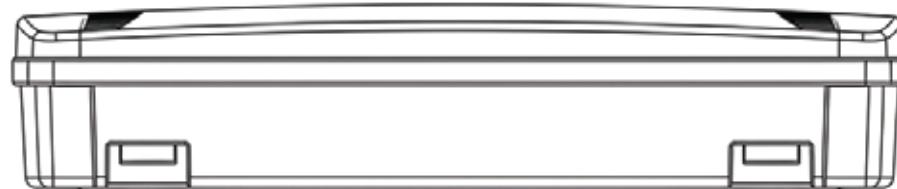

03	GENERAL PRODUCT DESCRIPTION	LED-integrated exit sign luminaire featuring high-visibility pictograms and a built-in backup battery. Designed for emergency lighting applications with a 160° beam angle, it provides reliable illumination in critical situations. Rated IP65 for water and dust resistance, making it ideal for public facility corridors and commercial building exits.																																				
04	FEATURES	<ul style="list-style-type: none"> <li>The products used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including dam location.</li> <li>These well designed units are low maintenance and provide the brightest light while using very little energy, and 24 meter viewing distance.</li> </ul>																																				
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td><td>220 – 240 V AC</td></tr> <tr> <td>Frequency</td><td>50 / 60Hz</td></tr> <tr> <td>Power Factor</td><td>98%</td></tr> <tr> <td>CCT</td><td>6000K with Color Sticker</td></tr> <tr> <td>CRI</td><td>80%</td></tr> <tr> <td>Power Supply</td><td>Nassli / Tridonic</td></tr> <tr> <td>LED Type</td><td>Osram / Bridgelux</td></tr> <tr> <td>Materials</td><td>PC, &amp; Friendly material</td></tr> <tr> <td>Beam Angle</td><td>160°</td></tr> <tr> <td>Life Time</td><td>50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +85°C</td></tr> <tr> <td>Certifications</td><td>CE, SELV and ISO</td></tr> <tr> <td>Mounting</td><td>Wall Mounted</td></tr> <tr> <td>IP Rating</td><td>IP65</td></tr> <tr> <td>Dimmable</td><td>No</td></tr> <tr> <td>Emergency</td><td>Yes</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </table>	Input Voltage	220 – 240 V AC	Frequency	50 / 60Hz	Power Factor	98%	CCT	6000K with Color Sticker	CRI	80%	Power Supply	Nassli / Tridonic	LED Type	Osram / Bridgelux	Materials	PC, & Friendly material	Beam Angle	160°	Life Time	50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +85°C	Certifications	CE, SELV and ISO	Mounting	Wall Mounted	IP Rating	IP65	Dimmable	No	Emergency	Yes	Warranty	5 Years
Input Voltage	220 – 240 V AC																																					
Frequency	50 / 60Hz																																					
Power Factor	98%																																					
CCT	6000K with Color Sticker																																					
CRI	80%																																					
Power Supply	Nassli / Tridonic																																					
LED Type	Osram / Bridgelux																																					
Materials	PC, & Friendly material																																					
Beam Angle	160°																																					
Life Time	50,000 Hour																																					
Operating Temp	-20°C to +55°C																																					
Storage Temp	-40°C to +85°C																																					
Certifications	CE, SELV and ISO																																					
Mounting	Wall Mounted																																					
IP Rating	IP65																																					
Dimmable	No																																					
Emergency	Yes																																					
Warranty	5 Years																																					
06	APPLICATIONS	It can be widely used for decoration in shopping malls, palaces, trade shows, supermarkets, conference halls, hotels, schools, hospitals, meeting rooms, factories, theaters, cinemas, kitchens, and corridors, etc.																																				
	 General Lighting	 Football Field	 Street Lamp	 Factory Lighting	 Green House	 Industrial Area	 Car Park	 Ware house																														
07	PHOTOMETRIC DATA																																					