

LED DECORATION TOP LIGHT

Data Sheet Document.

IP
65

5Y
WAR

11 W

CRI
>80

50.000
HOURS






01 ORDER CODE

02 DIMENSIONS (MM)

• NSL-TOPL-11W-XXK-SMD-DON-IP65

•

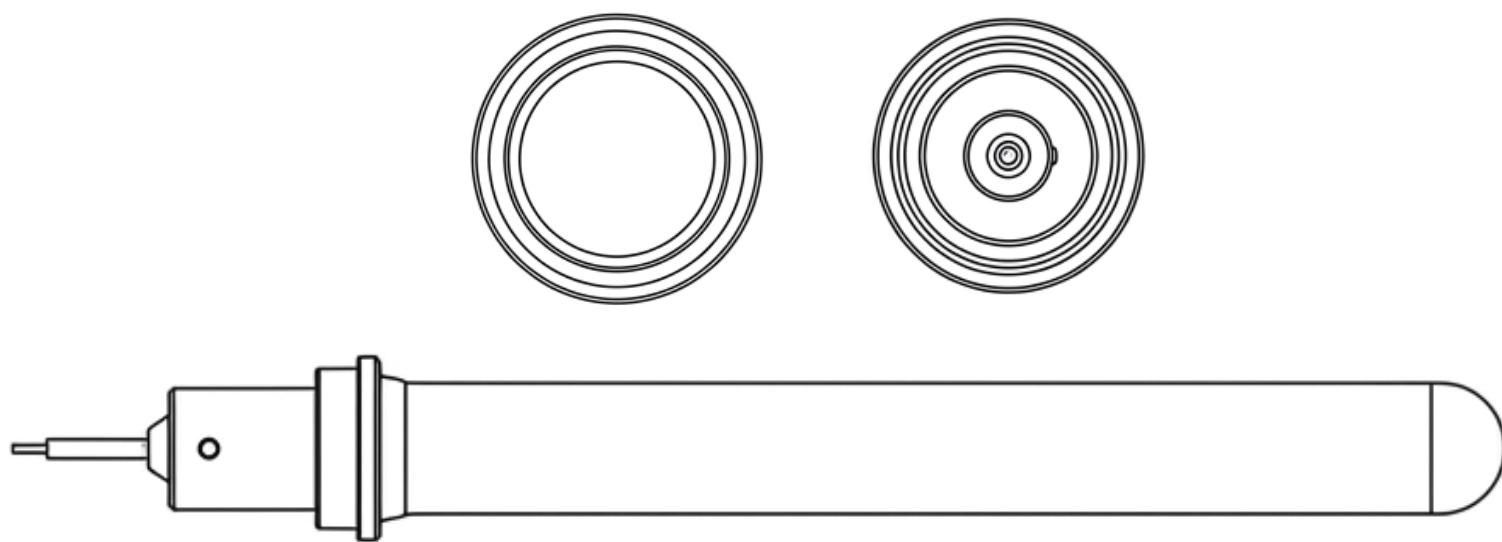

03	GENERAL PRODUCT DESCRIPTION	Decorative LED luminaire engineered for mounting atop streetlight poles. Designed for outdoor environments, it features a 360° beam angle and advanced 3D thermal cooling for optimal performance in high-temperature conditions. Ideal for enhancing visual appeal along boulevards and public roads with long-lasting, energy-efficient illumination.																																						
04	FEATURES	<ul style="list-style-type: none"> High cooling aluminum, with zip technology and 3D cooling created air convection channel, make it ideal for hot area. High lumen output. High power saving fixture. Overload protection, short circuit protection, and no-load protection. DMX addressable based on request. Wattage: 11 Watt (and can reach 22 Watt on request). 																																						
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td><td>220 – 240 V AC</td></tr> <tr> <td>Frequency</td><td>50 / 60Hz</td></tr> <tr> <td>Power Factor</td><td>95%</td></tr> <tr> <td>CCT</td><td>3000K, 4000K, Red, Green, Blue</td></tr> <tr> <td>CRI</td><td>80%</td></tr> <tr> <td>LED Efficiency</td><td>95Lm/W</td></tr> <tr> <td>Power Supply</td><td>Nassli</td></tr> <tr> <td>LED Type</td><td>Osram / Philips</td></tr> <tr> <td>Materials</td><td>Aluminum, PC, & Friendly material</td></tr> <tr> <td>Beam Angle</td><td>360°</td></tr> <tr> <td>Life Time</td><td>50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +85°C</td></tr> <tr> <td>Certifications</td><td>CE, SELV and ISO</td></tr> <tr> <td>Mounting</td><td>Street Light</td></tr> <tr> <td>IP Rating</td><td>IP65</td></tr> <tr> <td>Dimmable</td><td>On Request</td></tr> <tr> <td>Emergency</td><td>N/A</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </table>	Input Voltage	220 – 240 V AC	Frequency	50 / 60Hz	Power Factor	95%	CCT	3000K, 4000K, Red, Green, Blue	CRI	80%	LED Efficiency	95Lm/W	Power Supply	Nassli	LED Type	Osram / Philips	Materials	Aluminum, PC, & Friendly material	Beam Angle	360°	Life Time	50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +85°C	Certifications	CE, SELV and ISO	Mounting	Street Light	IP Rating	IP65	Dimmable	On Request	Emergency	N/A	Warranty	5 Years
Input Voltage	220 – 240 V AC																																							
Frequency	50 / 60Hz																																							
Power Factor	95%																																							
CCT	3000K, 4000K, Red, Green, Blue																																							
CRI	80%																																							
LED Efficiency	95Lm/W																																							
Power Supply	Nassli																																							
LED Type	Osram / Philips																																							
Materials	Aluminum, PC, & Friendly material																																							
Beam Angle	360°																																							
Life Time	50,000 Hour																																							
Operating Temp	-20°C to +55°C																																							
Storage Temp	-40°C to +85°C																																							
Certifications	CE, SELV and ISO																																							
Mounting	Street Light																																							
IP Rating	IP65																																							
Dimmable	On Request																																							
Emergency	N/A																																							
Warranty	5 Years																																							
06	APPLICATIONS	<ul style="list-style-type: none"> LED decoration top light designed outdoor use and normally to be installed on the top of the street light column. . 																																						
		<div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  General Lighting </div> <div style="text-align: center;">  Football Field </div> <div style="text-align: center;">  Street Lamp </div> <div style="text-align: center;">  Factory Lighting </div> <div style="text-align: center;">  Green House </div> <div style="text-align: center;">  Industrial Area </div> <div style="text-align: center;">  Car Park </div> <div style="text-align: center;">  Ware house </div> </div>																																						
07	PHOTOMETRIC DATA																																							