LED DOWN LIGHT
CRX24-3

Data Sheet Documents

-

IP
20

5Y
WAR

CRI
>80/>90

50.000
HOURS

01	ORDER CODE	• NSL-CRX24-3-N100-10W-XXK-SMD-NS-IP20
02	Dimensions (mm)	• W37.5 H114 Ø100

01	ORDER CODE	• NSL-CRX24-3-N100-10W-XXK-SMD-TD-XX-IP20
02	Dimensions (mm)	• W37.5 H114 Ø100

FRONT VIEW

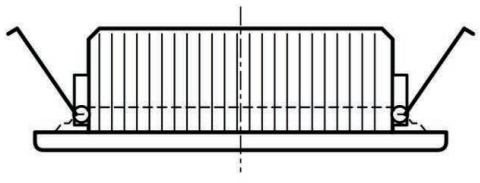

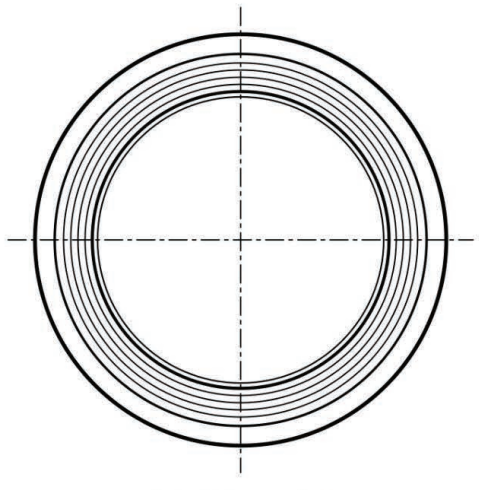

BOTTOM VIEW

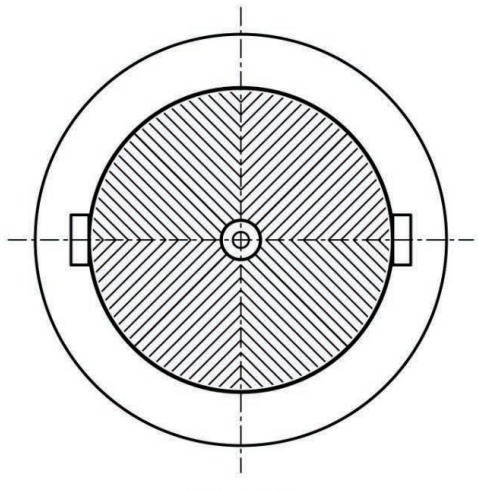

TOP VIEW

03 GENERAL PRODUCT DESCRIPTION

Refined 10W recessed LED downlight with a clean, flush white face and a robust die-cast aluminum fin heat sink, CRI >80/90 for accurate, true-to-life color rendering, IP20 rated for both standard and bathroom applications, rated for 50,000 hours and backed by a 5-year warranty.

04 FEATURES

Engineered for superior thermal management and long-term consistent performance. The frosted opal diffuser delivers soft, uniform, glare-free downward illumination.

05 TECHNICAL DATA

Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
Power factor	>90%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	>80%, >90%
Wattage	10W
LED Efficiency	100-120Lm/W
Lumen	1000 Lm
Power supply	NASSLI
LED Type	BRIGDELUX
Materials	DICAST ALUMINUIM HOUSING, PC DIFFUSER
Life Time	>50,000 hours
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV, SASO
Mounting	RECESSED
IP Rating	IP20
Dimmable	On&Of / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

Perfect for bathrooms, kitchens, corridors, retail spaces, and any interior where discreet, reliable, and energy-efficient recessed lighting is essential.

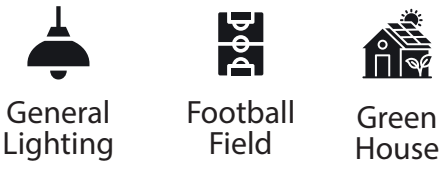
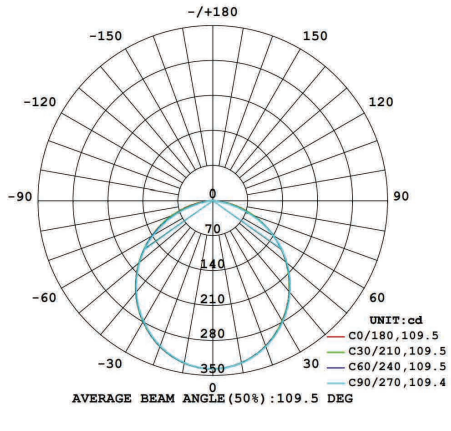
07 PHOTOMETRIC DATA