

LED DOWN LIGHT CRX23-3

Data Sheet Documents

IP
20/65

5Y
WAR

CRI
>80/>90


50.000
HOURS





- | | | |
|----|-----------------|--------------------------------------|
| 01 | ORDER CODE | • NSL-CRX23-3-N70-7W-XXK-SMD-NS-IP20 |
| 02 | DIMENSIONS (MM) | • D91 H45 Ø75 |

- | | | |
|----|-----------------|---|
| 01 | ORDER CODE | • NSL-CRX23-3-N70-5W-XXK-SMD-TD-XX-IP65 |
| 02 | DIMENSIONS (MM) | • D91 H45 Ø75 |

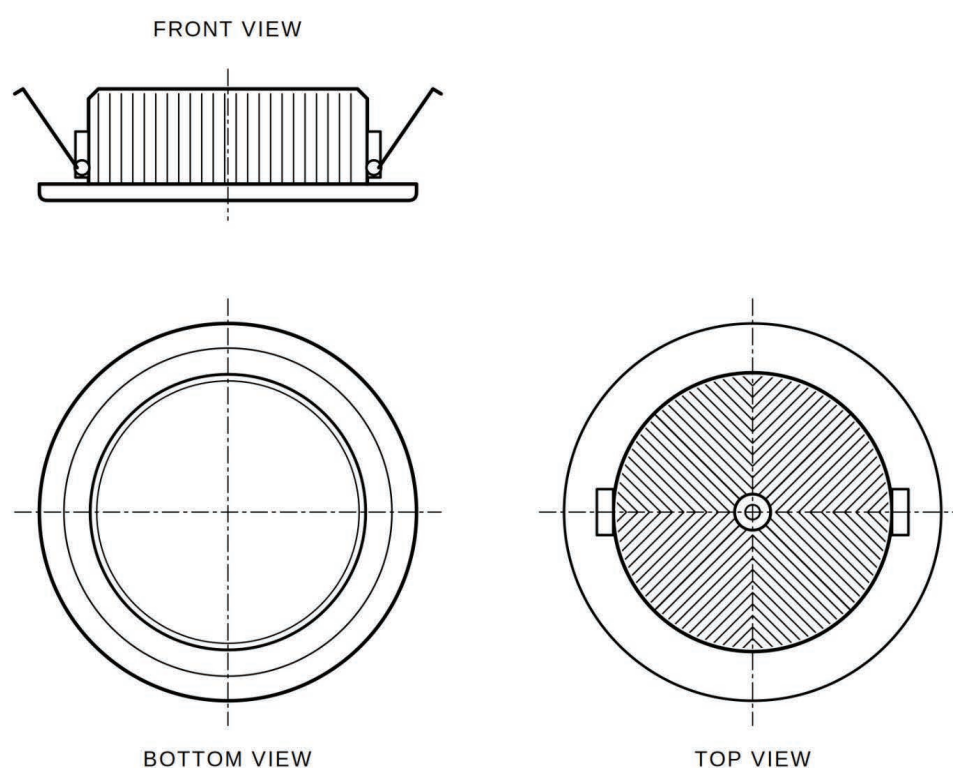


03 GENERAL PRODUCT DESCRIPTION Compact 7W recessed LED downlight with a sleek flush frosted diffuser CRI >80/90 for accurate color rendering, IP20/65 rated for bathroom and wet area suitability, rated for 50,000 hours and backed by a 5-year warranty.

04 FEATURES precision-engineered cross-fin heat sink that ensures outstanding thermal management and long-term LED performance. Delivers soft, uniform, glare-free downward illumination.

05	TECHNICAL DATA	Input Voltage	220 - 240 V A C
		Frequency	50 / 60 H z
		Power factor	>90%
		CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
		CRI	>80%, >90%
		Wattage	7W
		LED Efficiency	100-120Lm/W
		LUMEN	700Lm
		Power supply	NASSLI
		LED Type	BRIGDELUX
		Materials	DICAST ALUMINIUM HOUSING, PC DIFFUSER
		Life Time	>50,000 hours
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +65°C
		Certifications	CE, SELV, SASO
		Mounting	RECESSED
		IP Rating	IP20 / IP65
		Dimmable	On&Of / Phase cut / 0-10V / Dali
		Emergency	On Request
		Warranty	5 Years

06 APPLICATIONS Perfect for bathrooms, kitchens, corridors, retail spaces, and any interior where discreet, reliable, and energy-efficient recessed lighting is essential.

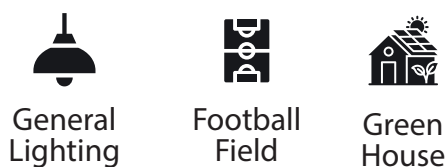

07 PHOTOMETRIC DATA

