

# LED DOWN LIGHT CRX V2

Data Sheet Document.

---

IP  
20/65T

5Y  
WAR

5-35 W  
840 LMT

CRI  
>80

50.000  
HOURS






01 ORDER CODE

02 DIMENSIONS (MM)

- NSL-CRX23-3-V2-N70-7W-XXK-SMD-NS-IP20
- W35 H95 Ø70

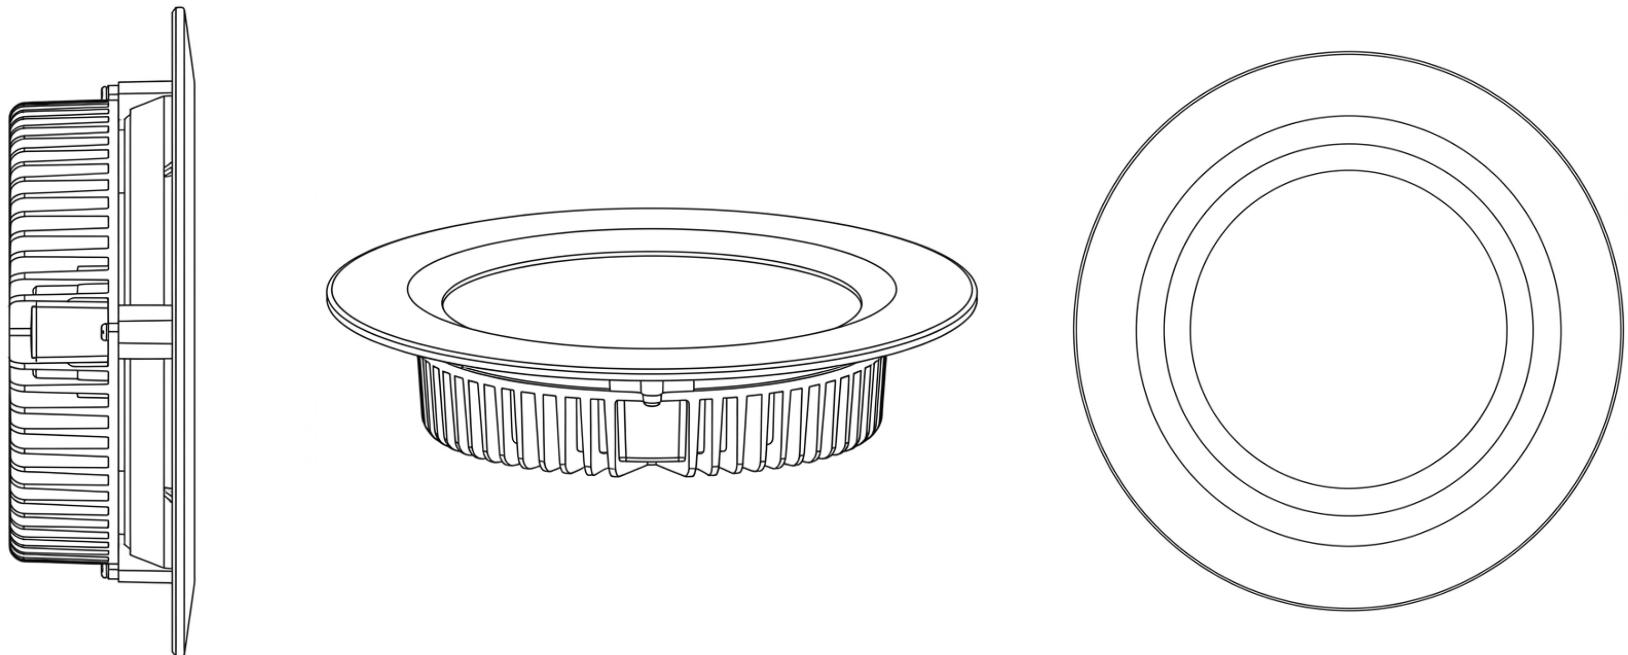

**03** **GENERAL PROUDCT DISCRIPTION** Product Description: Moisture and dust resistant downlight (IP65) ideal for entrances and bathrooms. It delivers uniform lighting with a 120° beam angle and luminous efficacy of up to 130 lm/W. Equipped with high-performance Osram LED chips and an advanced metal heat sink for optimal thermal management and long-lasting performance.

**04** **FEATURES**

- The product used as pure light source, using LED technology human and environment friendly, no PB, Hg nor UV.
- High power saving fixture, no decay and color temperature shift.
- Can be dimmable (through direct control or via network).

<b>05</b>	<b>TECHNICAL DATA</b>	Input Voltage	220 - 240 V AC
		Frequency	50 / 60Hz
		Power Factor	98%
		CCT	2700K, 3000K, 4000K, 6000K
		CRI	80%
		LED Efficiency	120-130lm/W
		Power supply	Tridonic / Nassli
		LED Type	Osram / Bridgelux
		Materials	Aluminum, PC, & Friendly material
		Beam Angle	120°
		Life Time	50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +65°C
		Certifications	CE, SELV and ISO
		Mounting	Recessed
		IP Rating	IP20 / IP65
		Dimmable:	On Request
		Emergency	On Request
		Warranty	5 Years

**06** **APPLICATIONS** It can be widely used for shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc ...



General  
Lighting



Football  
Field



Street  
Lamp



Factory  
Lighting



Green  
House



Industrial  
Area



Car  
Park



Ware  
house

**07** **PHOTOMETRIC DATA**

