

LED DOWN LIGHT GS ADJUSTABLE

Data Sheet Document.

IP
23

5Y
WAR

15-30 W
1950 LMT

CRI
>80

50.000
HOURS






01 ORDER CODE

02 DIMENSIONS (MM)

- NSL-DAJ-GS-95-15W-XXK-COB-NS-IP23
- W110 H131.4 Ø95,

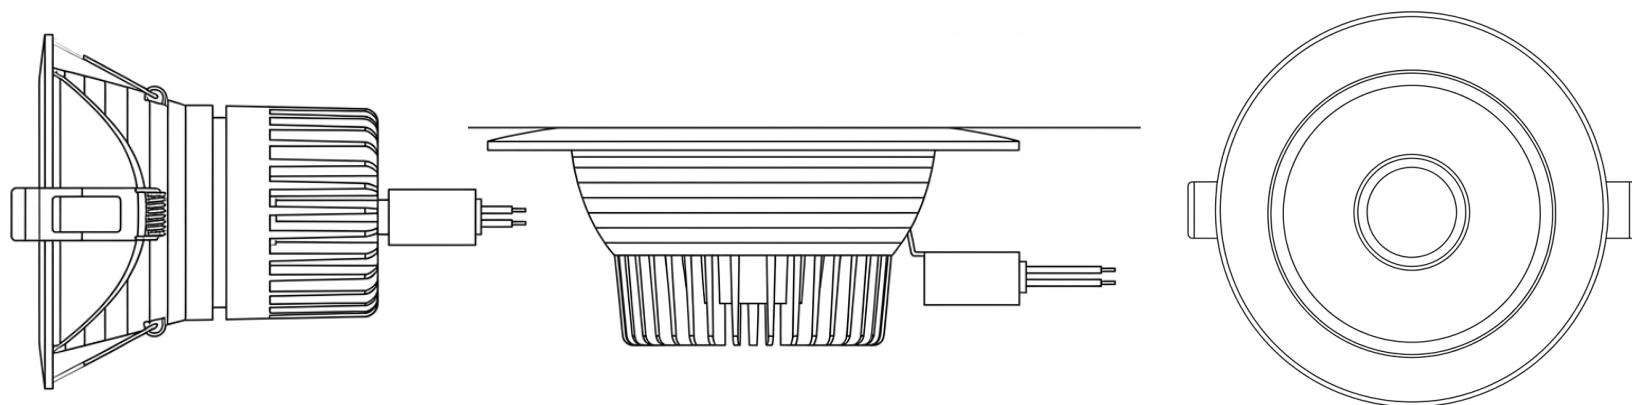

03	GENERAL PRODUCT DESCRIPTION	Precision-adjustable indoor downlight offering focused illumination, equipped with a honeycomb lens to reduce visual glare. Delivers luminous efficacy of up to 140 lm/W using COB LED technology. Ideal for luxury living rooms and high-end lounges, it supports dimming and is available in multiple output configurations.																																								
04	FEATURES	<ul style="list-style-type: none"> The product used as pure light source, using LED technology human and environment friendly, no PB, Hg nor UV. High power saving fixture, no decay and color temperature shift. Can be dimmable (through direct control or via network). 																																								
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td> <td>220 - 240 V AC</td> </tr> <tr> <td>Frequency</td> <td>50 / 60Hz</td> </tr> <tr> <td>Power Factor</td> <td>98%</td> </tr> <tr> <td>CCT</td> <td>3000K, 4000K, 5000K, 6000K</td> </tr> <tr> <td>CRI</td> <td>80%, >90%</td> </tr> <tr> <td>LED Efficiency</td> <td>130-140Lm/W</td> </tr> <tr> <td>Power supply</td> <td>Tridonic / Nassli</td> </tr> <tr> <td>LED Type</td> <td>Citizen / Bridgelux</td> </tr> <tr> <td>Materials</td> <td>Aluminum, PC, & Friendly material</td> </tr> <tr> <td>HoneyComb</td> <td>UGR</td> </tr> <tr> <td>Beam Angle</td> <td>24°, 38°</td> </tr> <tr> <td>Life Time</td> <td>50,000 Hour</td> </tr> <tr> <td>Operating Temp</td> <td>-20°C to +55°C</td> </tr> <tr> <td>Storage Temp</td> <td>-40°C to +85°C</td> </tr> <tr> <td>Certifications</td> <td>CE, SELV and ISO</td> </tr> <tr> <td>Mounting</td> <td>Recessed</td> </tr> <tr> <td>IP Rating</td> <td>IP23</td> </tr> <tr> <td>Dimmable:</td> <td>On Request</td> </tr> <tr> <td>Emergency</td> <td>On Request</td> </tr> <tr> <td>Warranty</td> <td>5 Years</td> </tr> </table>	Input Voltage	220 - 240 V AC	Frequency	50 / 60Hz	Power Factor	98%	CCT	3000K, 4000K, 5000K, 6000K	CRI	80%, >90%	LED Efficiency	130-140Lm/W	Power supply	Tridonic / Nassli	LED Type	Citizen / Bridgelux	Materials	Aluminum, PC, & Friendly material	HoneyComb	UGR	Beam Angle	24°, 38°	Life Time	50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +85°C	Certifications	CE, SELV and ISO	Mounting	Recessed	IP Rating	IP23	Dimmable:	On Request	Emergency	On Request	Warranty	5 Years
Input Voltage	220 - 240 V AC																																									
Frequency	50 / 60Hz																																									
Power Factor	98%																																									
CCT	3000K, 4000K, 5000K, 6000K																																									
CRI	80%, >90%																																									
LED Efficiency	130-140Lm/W																																									
Power supply	Tridonic / Nassli																																									
LED Type	Citizen / Bridgelux																																									
Materials	Aluminum, PC, & Friendly material																																									
HoneyComb	UGR																																									
Beam Angle	24°, 38°																																									
Life Time	50,000 Hour																																									
Operating Temp	-20°C to +55°C																																									
Storage Temp	-40°C to +85°C																																									
Certifications	CE, SELV and ISO																																									
Mounting	Recessed																																									
IP Rating	IP23																																									
Dimmable:	On Request																																									
Emergency	On Request																																									
Warranty	5 Years																																									
06	APPLICATIONS	Ideal for Schools, Offices, Universities, Malls, Supermarkets, and special design for hotels and palaces, etc.																																								



General Lighting



Football Field



Street Lamp



Factory Lighting



Green House



Industrial Area



Car Park



Ware house

07	PHOTOMETRIC DATA
----	------------------

