

LED DOWN WA LIGHT ADJUSTABLE

Data Sheet Documents

**IP
23**

**5Y
WAR**

**CRI
>80 / >90**

**50.000
HOURS**






01 | ORDER CODE


• NSL-DAJ-GS-95-15W-XXK-COB-TD-XX-IP23

02 | DIMENSIONS (MM)


• W110 H131 Ø95 MM

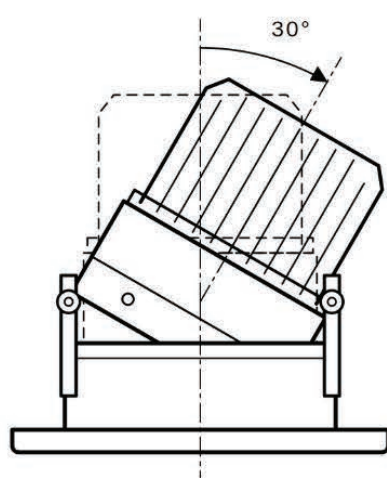

FRONT VIEW

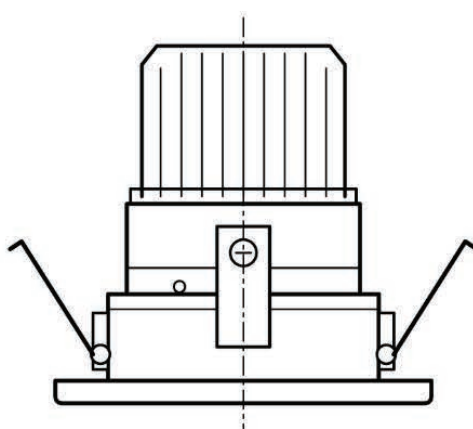

SIDE VIEW

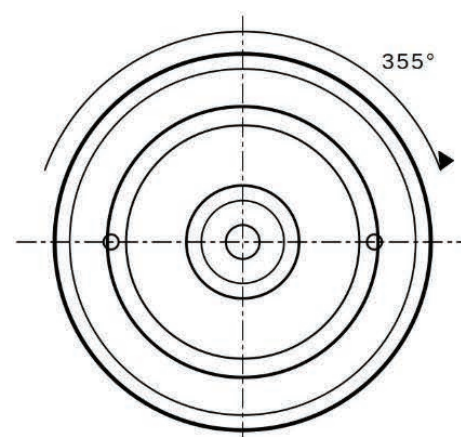

BOTTOM VIEW

03 GENERAL PRODUCT DESCRIPTION

Refined 15W adjustable LED spotlight with a deep anti-glare reflector and a warm champagne finish that blends seamlessly into any sophisticated interior. Fully tiltable for precise accent and directional lighting, with CRI 80/90 for vivid, true-to-life color rendering, rated for 50,000 hours and backed by a 5-year warranty.

04 FEATURES

- Deep anti-glare reflector, fully adjustable tilt for precise beam direction, high-efficacy 15W output, superior heat dissipation
- Slim recessed profile for a clean, flush finish, and a premium champagne finish that complements any high-end interior.

05	TECHNICAL DATA	Input Voltage	220-240 VAC
		Frequency	50/60 Hz
		Power factor	80% / 90%
		CCT	2700K, 3000K, 4000K, 5000K, 6000K
		CRI	90%
		LED Efficiency	70-100Lm/W
		Wattage	15 W
		Lumen	1050 Lm
		Power supply	Tridonic / Nassli / GL/QP
		LED Type	BRIDGELUX
		Materials	Di Cast Aluminum
		Beam Angle	24°, 38°
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +85°C
		Certifications	CE, SELV and ISO
		Mounting	Recessed
		IP Rating	IP23
		Dimmable	On&Of / Phase cut / 0-10V / Dali
		Emergency	On Request
		Warranty	5 Years

06 APPLICATIONS

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room, Factories, Theater, Cinemas, Kitchens and Corridor etc...



07 PHOTOMETRIC DATA

