

# LED EMERGENCY LIGHT

Data Sheet Document.

IP  
20


1Y  
WAR

25 W  
840 LMT

CRI  
>80




50.000  
HOURS



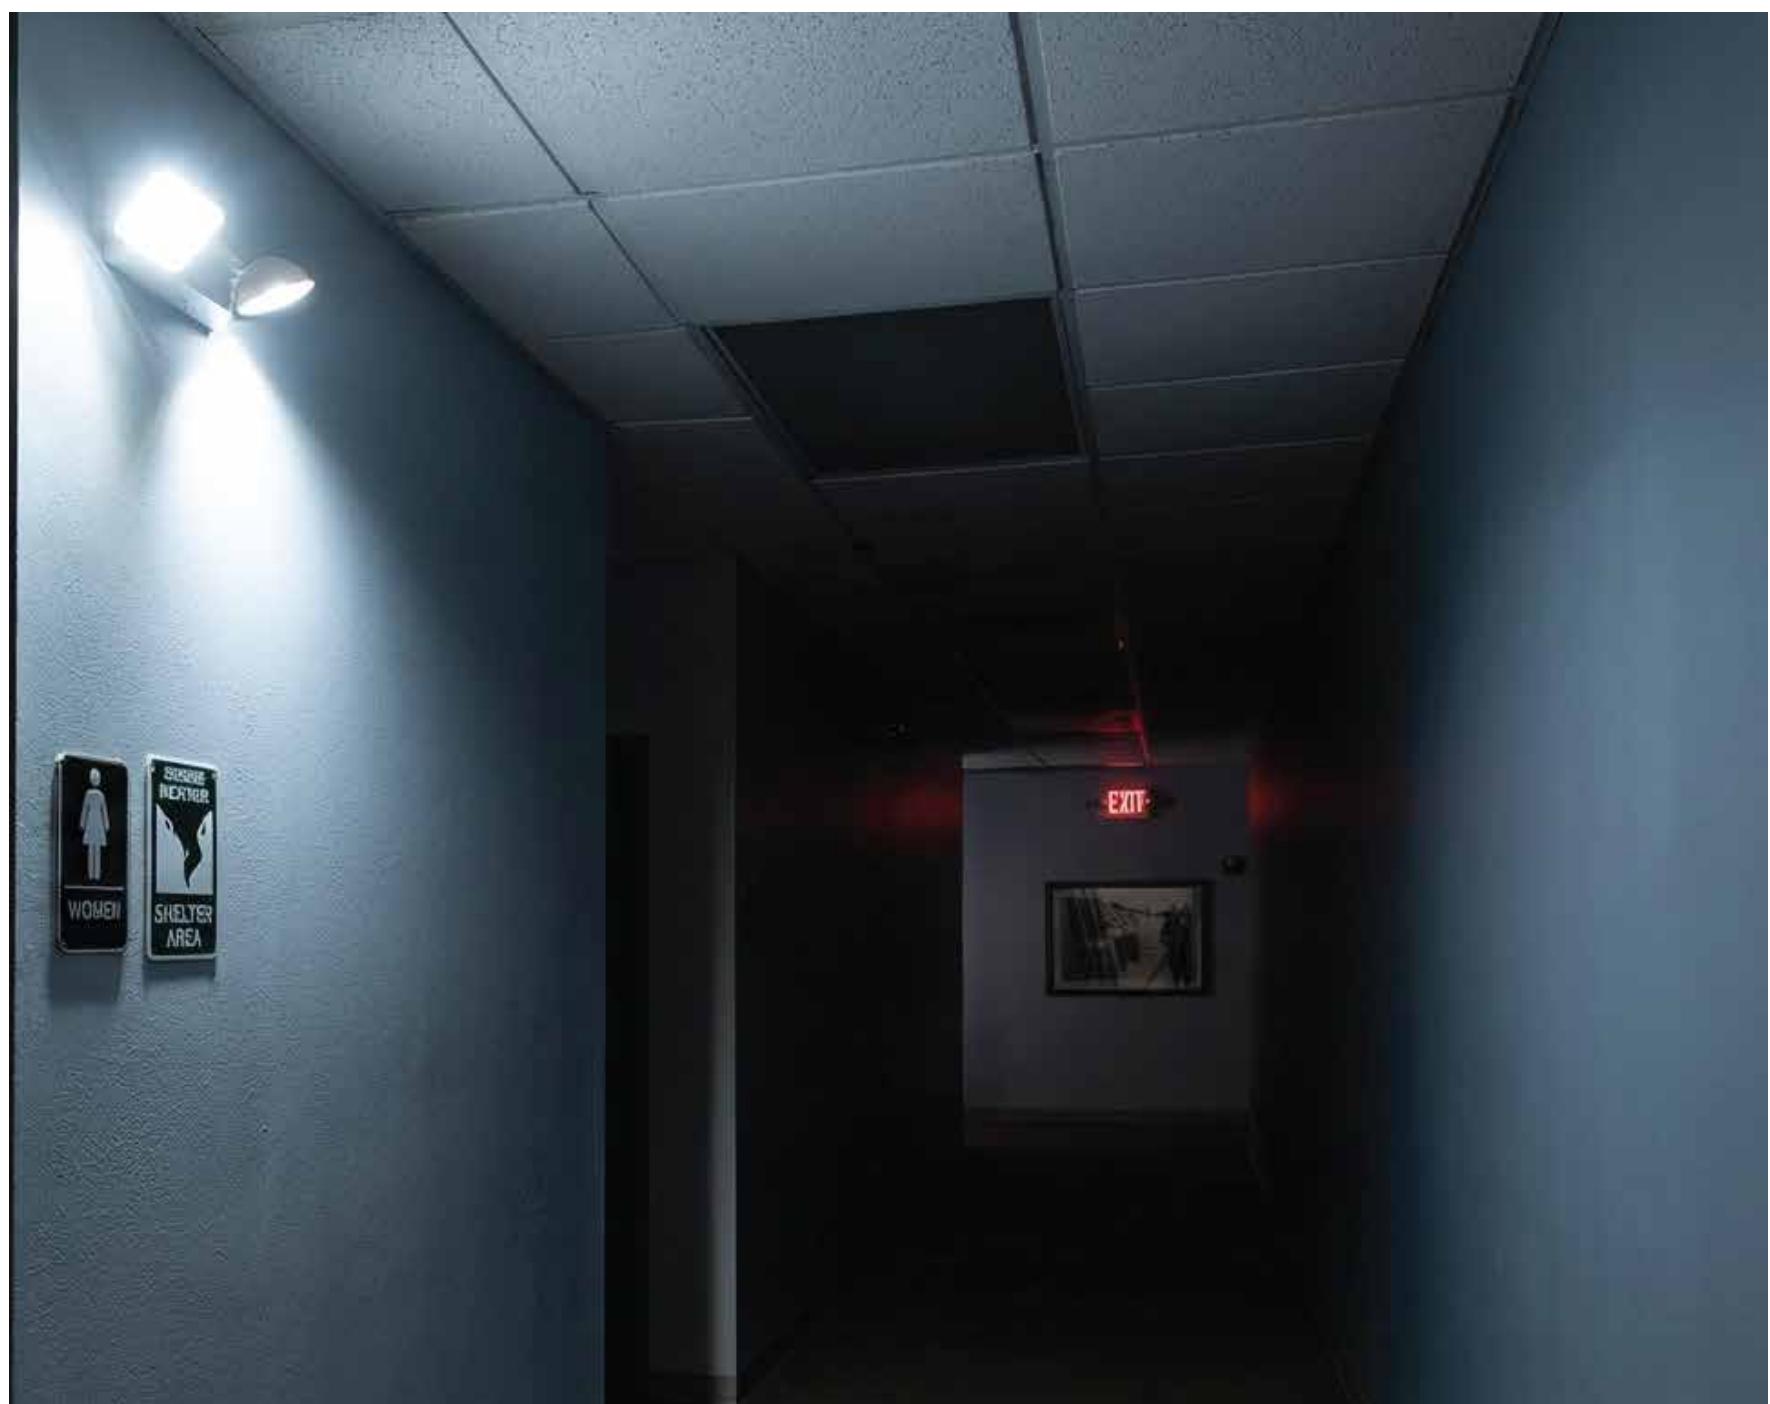

01 ORDER CODE .....

02 DIMENSIONS (MM) .....

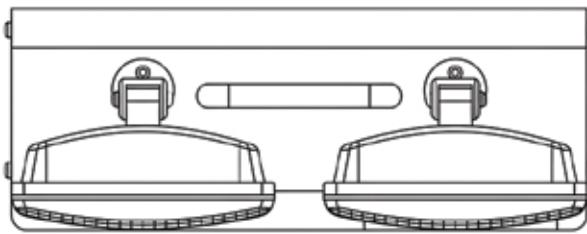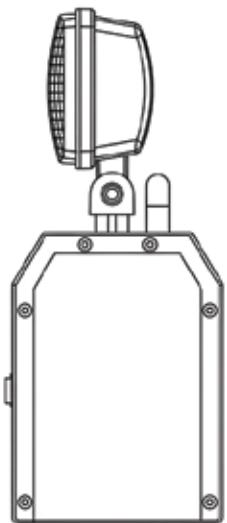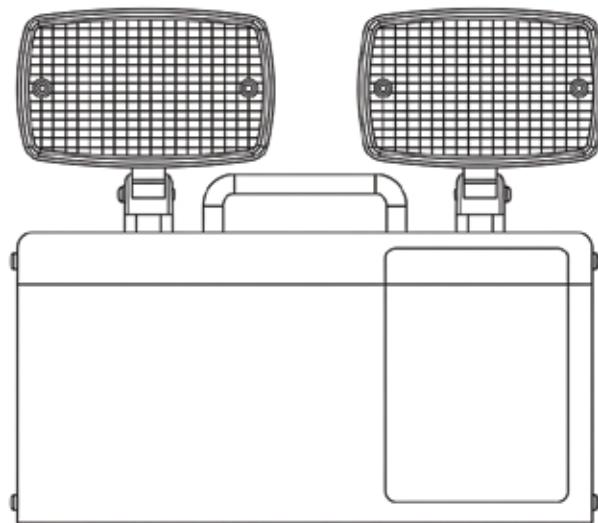

03	GENERAL PRODUCT DESCRIPTION	Dual-head LED emergency light designed for power outages and critical situations. Equipped with a rechargeable Ni-Cd battery, it provides a visible range of up to 24 meters and an emergency runtime of 120-180 minutes. Built with durable polycarbonate housing, ideal for corridors, stairwells, and public facilities.																																				
04	FEATURES	<ul style="list-style-type: none"> <li>The product used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location.</li> <li>These well designed, units are low maintenance and provide.</li> </ul>																																				
05	TECHNICAL DATA	<table> <tr> <td>Part Number</td><td>KE - 127</td></tr> <tr> <td>LED</td><td>SMD 2835 LED / 14 PCS</td></tr> <tr> <td>Lamp protection</td><td>Over charge and discharge protection</td></tr> <tr> <td>Battery</td><td>NI-CD 3.6V 1.0AH</td></tr> <tr> <td>Input Voltage</td><td>220-240 V AC</td></tr> <tr> <td>Visible Distance</td><td>24 m visible distance</td></tr> <tr> <td>CCT</td><td>White</td></tr> <tr> <td>Materials</td><td>Polycarbonated housing &amp; heads</td></tr> <tr> <td>Lumen</td><td>150 Lm</td></tr> <tr> <td>Charging Time</td><td>12 hours</td></tr> <tr> <td>Emergency Time</td><td>120-180 hours</td></tr> <tr> <td>Indicator</td><td>LED</td></tr> <tr> <td>Power</td><td>Red</td></tr> <tr> <td>Charger</td><td>Green</td></tr> <tr> <td>IP Rating</td><td>IP20</td></tr> <tr> <td>Mounting</td><td>Wall mounted</td></tr> <tr> <td>Emergency</td><td>Yes</td></tr> <tr> <td>LED Power</td><td>2 x 1W</td></tr> </table>	Part Number	KE - 127	LED	SMD 2835 LED / 14 PCS	Lamp protection	Over charge and discharge protection	Battery	NI-CD 3.6V 1.0AH	Input Voltage	220-240 V AC	Visible Distance	24 m visible distance	CCT	White	Materials	Polycarbonated housing & heads	Lumen	150 Lm	Charging Time	12 hours	Emergency Time	120-180 hours	Indicator	LED	Power	Red	Charger	Green	IP Rating	IP20	Mounting	Wall mounted	Emergency	Yes	LED Power	2 x 1W
Part Number	KE - 127																																					
LED	SMD 2835 LED / 14 PCS																																					
Lamp protection	Over charge and discharge protection																																					
Battery	NI-CD 3.6V 1.0AH																																					
Input Voltage	220-240 V AC																																					
Visible Distance	24 m visible distance																																					
CCT	White																																					
Materials	Polycarbonated housing & heads																																					
Lumen	150 Lm																																					
Charging Time	12 hours																																					
Emergency Time	120-180 hours																																					
Indicator	LED																																					
Power	Red																																					
Charger	Green																																					
IP Rating	IP20																																					
Mounting	Wall mounted																																					
Emergency	Yes																																					
LED Power	2 x 1W																																					
06	APPLICATIONS	It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas and Corridor etc...																																				
07	PHOTOMETRIC DATA	<div style="display: flex; justify-content: space-around; align-items: center;">  General Lighting          Football Field          Street Lamp          Factory Lighting          Green House          Industrial Area          Car Park          Ware house       </div>																																				