

# LED EMERGENCY LIGHT

Data Sheet Document.

---

IP  
20/40 T

1Y  
WAR

5W

CRI  
>80

50.000  
HOURS







01 ORDER CODE

02 DIMENSIONS (MM)

- NSL-EXIT-D-SM-5W-HIP-DON-DF-IP20
- W335 H22 D45

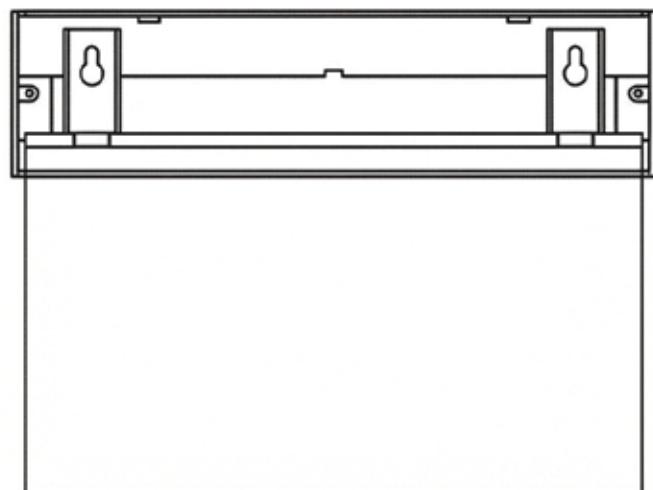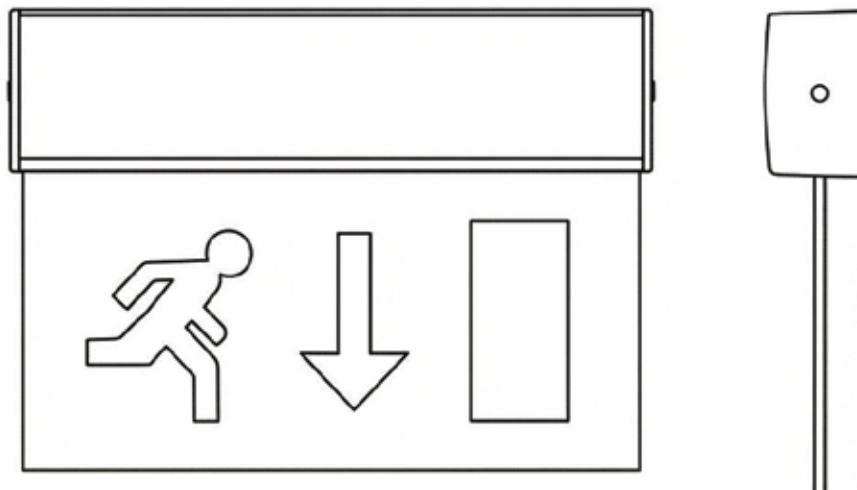

03	GENERAL PRODUCT DESCRIPTION	LED panel 60x60 integrated with distributed lenses, engineered to deliver precise, glare-free light distribution. Ideal for offices, educational institutions, and commercial centers, this fixture ensures uniform optical performance with a wide 160° beam angle and luminous efficacy of up to 130 lm/W. Constructed from aluminum and polycarbonate for enhanced durability.																																				
04	FEATURES	<ul style="list-style-type: none"> <li>The products used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location.</li> <li>These well designed, units are low maintenance and provide the brightest light while using very little energy, and 24 meter viewing distance.</li> </ul>																																				
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td><td>220 - 240 V AC</td></tr> <tr> <td>Frequency</td><td>50 / 60Hz</td></tr> <tr> <td>Power Factor</td><td>95%</td></tr> <tr> <td>CCT</td><td>Green</td></tr> <tr> <td>CRI</td><td>80%</td></tr> <tr> <td>Power Supply</td><td>Nassli</td></tr> <tr> <td>LED Type</td><td>Bridgelux</td></tr> <tr> <td>Materials</td><td>Aluminum, PC, &amp; Friendly material</td></tr> <tr> <td>Beam Angle</td><td>180°</td></tr> <tr> <td>Life Time</td><td>50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +65°C</td></tr> <tr> <td>Certifications</td><td>CE, SELV and ISO</td></tr> <tr> <td>Mounting</td><td>Pendant, Wall Mounted</td></tr> <tr> <td>IP Rating</td><td>IP20 / IP40</td></tr> <tr> <td>Dimmable</td><td>No</td></tr> <tr> <td>Emergency</td><td>Yes</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </table>	Input Voltage	220 - 240 V AC	Frequency	50 / 60Hz	Power Factor	95%	CCT	Green	CRI	80%	Power Supply	Nassli	LED Type	Bridgelux	Materials	Aluminum, PC, & Friendly material	Beam Angle	180°	Life Time	50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +65°C	Certifications	CE, SELV and ISO	Mounting	Pendant, Wall Mounted	IP Rating	IP20 / IP40	Dimmable	No	Emergency	Yes	Warranty	5 Years
Input Voltage	220 - 240 V AC																																					
Frequency	50 / 60Hz																																					
Power Factor	95%																																					
CCT	Green																																					
CRI	80%																																					
Power Supply	Nassli																																					
LED Type	Bridgelux																																					
Materials	Aluminum, PC, & Friendly material																																					
Beam Angle	180°																																					
Life Time	50,000 Hour																																					
Operating Temp	-20°C to +55°C																																					
Storage Temp	-40°C to +65°C																																					
Certifications	CE, SELV and ISO																																					
Mounting	Pendant, Wall Mounted																																					
IP Rating	IP20 / IP40																																					
Dimmable	No																																					
Emergency	Yes																																					
Warranty	5 Years																																					
06	APPLICATIONS	It can be widely used for shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc ...																																				
07	PHOTOMETRIC DATA	<div style="display: flex; justify-content: space-around; align-items: center;">  <span>General Lighting</span>  <span>Football Field</span>  <span>Street Lamp</span>  <span>Factory Lighting</span>  <span>Green House</span>  <span>Industrial Area</span>  <span>Car Park</span>  <span>Ware house</span> </div>																																				