

LED EXIT LIGHT SINGLE

Data Sheet Document.

IP
20/40

5Y
WAR

60-150 W

CRI
>80

50.000
HOURS






01 ORDER CODE

• NSL-EXIT-S-SM-5W-HIP-DON-DF-IP20

02 DIMENSIONS (MM)

• W335 H22 D45

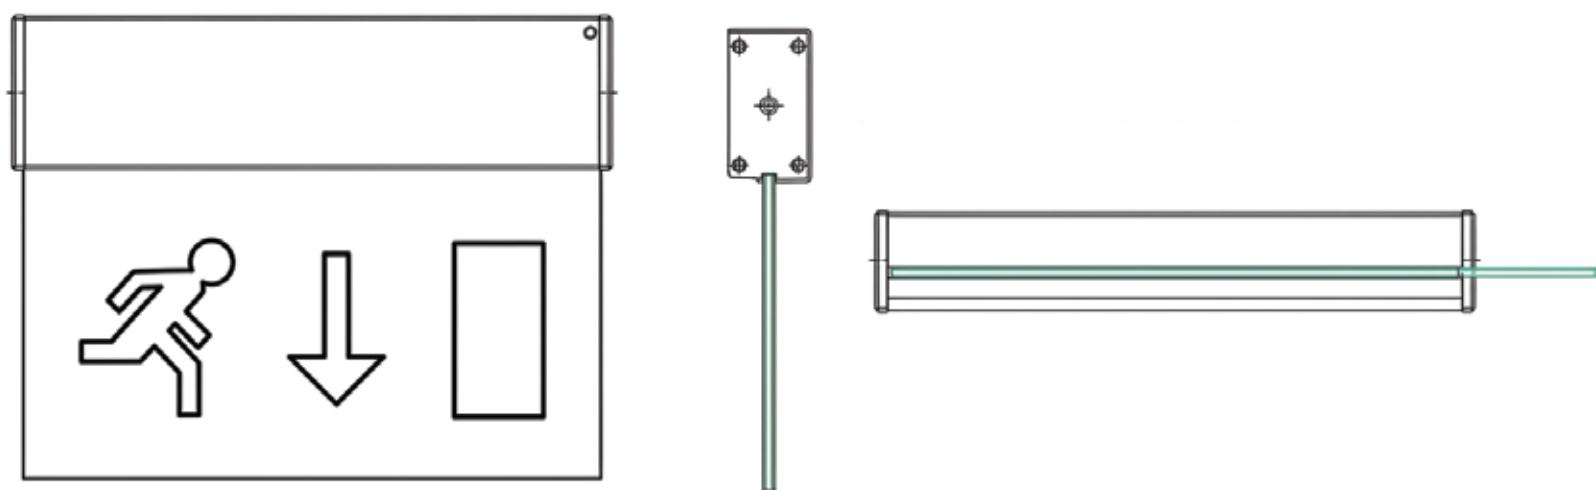

03	GENERAL PRODUCT DESCRIPTION	Single-sided LED exit sign featuring high-visibility green indicators and integrated emergency backup battery. Designed for wall or ceiling mounting with a 180° beam angle, it ensures clear guidance in emergency situations. Offers long-lasting performance with a lifetime exceeding 50,000 hours, making it ideal for corridors, hospitals, and commercial buildings.																																				
04	FEATURES	<ul style="list-style-type: none"> The products used as pure light source, LED line of exit and emergency lighting offer the best in energy efficiency and is perfect for many applications, including damp location. These well designed units are low maintenance and provide the brightest light while using very little energy, and 24 meter viewing distance. 																																				
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td><td>220 – 240 V AC</td></tr> <tr> <td>Frequency</td><td>50 / 60Hz</td></tr> <tr> <td>Power Factor</td><td>95%</td></tr> <tr> <td>CCT</td><td>Green</td></tr> <tr> <td>CRI</td><td>80%</td></tr> <tr> <td>Power Supply</td><td>Nassli</td></tr> <tr> <td>LED Type</td><td>Bridgelux</td></tr> <tr> <td>Materials</td><td>Aluminum, PC, & Friendly material</td></tr> <tr> <td>Beam Angle</td><td>180°</td></tr> <tr> <td>Life Time</td><td>50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +65°C</td></tr> <tr> <td>Certifications</td><td>CE, SELV and ISO</td></tr> <tr> <td>Mounting</td><td>Pendant, Wall Mounted</td></tr> <tr> <td>IP Rating</td><td>IP20 / 40</td></tr> <tr> <td>Dimmable</td><td>No</td></tr> <tr> <td>Emergency</td><td>Yes / CBS</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </table>	Input Voltage	220 – 240 V AC	Frequency	50 / 60Hz	Power Factor	95%	CCT	Green	CRI	80%	Power Supply	Nassli	LED Type	Bridgelux	Materials	Aluminum, PC, & Friendly material	Beam Angle	180°	Life Time	50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +65°C	Certifications	CE, SELV and ISO	Mounting	Pendant, Wall Mounted	IP Rating	IP20 / 40	Dimmable	No	Emergency	Yes / CBS	Warranty	5 Years
Input Voltage	220 – 240 V AC																																					
Frequency	50 / 60Hz																																					
Power Factor	95%																																					
CCT	Green																																					
CRI	80%																																					
Power Supply	Nassli																																					
LED Type	Bridgelux																																					
Materials	Aluminum, PC, & Friendly material																																					
Beam Angle	180°																																					
Life Time	50,000 Hour																																					
Operating Temp	-20°C to +55°C																																					
Storage Temp	-40°C to +65°C																																					
Certifications	CE, SELV and ISO																																					
Mounting	Pendant, Wall Mounted																																					
IP Rating	IP20 / 40																																					
Dimmable	No																																					
Emergency	Yes / CBS																																					
Warranty	5 Years																																					
06	APPLICATIONS	It can be widely used for decoration in shopping malls, palaces, trade shows, supermarkets, conference halls, hotels, schools, hospitals, meeting rooms, factories, theaters, cinemas, kitchens, and corridors, etc.																																				
07	PHOTOMETRIC DATA	<div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  General Lighting </div> <div style="text-align: center;">  Football Field </div> <div style="text-align: center;">  Street Lamp </div> <div style="text-align: center;">  Factory Lighting </div> <div style="text-align: center;">  Green House </div> <div style="text-align: center;">  Industrial Area </div> <div style="text-align: center;">  Car Park </div> <div style="text-align: center;">  Ware house </div> </div>																																				