
$\textbf{Manufacturing} \ is \ a \ design \ practice \ that \ works \ along side$ those with a passion for design and **production**

LED HIGH BAY S

100-200

50,000 HOURS

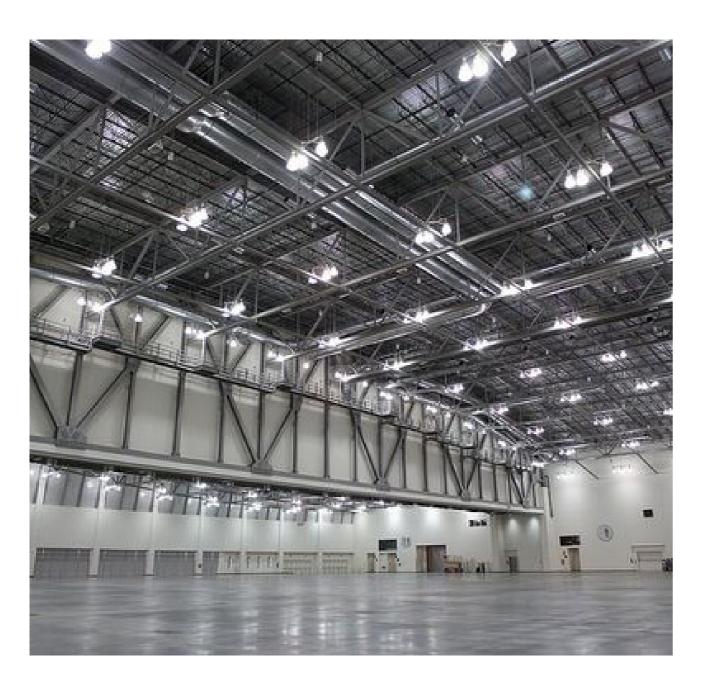

 $\textbf{Manufacturing} \ is \ a \ design \ practice \ that \ works \ along side$ those with a passion for design and **production**







Application

Ideal for any large area with height ceiling.

Such as, warehouse, factories, parks, commercial complexes, indoor playgrounds, hangars

Feature

High cooling aluminum, with zip technology and 3D cooling created air convection channel, make it L ideal for hot area.

High lumen output.

High power saving fixture.

Overload protection, short circuit protection, and no-load protection.

Product Details

Input Voltage	220 - 240 V A C
Frequency	50/60Hz
Power Factor	>98%
ССТ	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	120-130Lm/W
Power Supply	Tridonic / Philips / Nassli
LED Type	Osram / Philips
Materials	Aluminum, PC, & Friendly material
Beam Angle	60°, 90°, 120°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Suspended
IP Rating	IP65
Dimmable	On Request
Emergency	N/A
Warranty	5 Years

Power (Watt)	Dimensions	Lumen
100W	D 420 H 223	11000
Order Code	NSL-HBS-XD-100W-XXK-SMD-TD-XX-IP65	
Order Code	NSL-HBS-XD-100W-XXK-SMD-PH-XX-IP65	

	Power (Watt)	Dimensions	Lumen
	150W	D 450 H 250	16500
	Order Code	NSL-HBS-XD-150W-XXK-SMD-TD-XX-IP65	
	Order Code	NSL-HBS-XD-150W-XXK-SMD-TD-XX-IP65	

Power (Watt)	Dimensions	Lumen	
200W	D 450 H 250	22000	
Order Code	NSL-HBS-XD-200W-XXK-SMD-TD-XX-IP65		
Order Code	NSL-HBS-XD-200W-XXK-SMD-TD-XX-IP65		