

LED LIGHT UNDER CANOPY S

Data Sheet Document.


IP
65

5Y
WAR

50-150 W

CRI
>80




50.000
HOURS

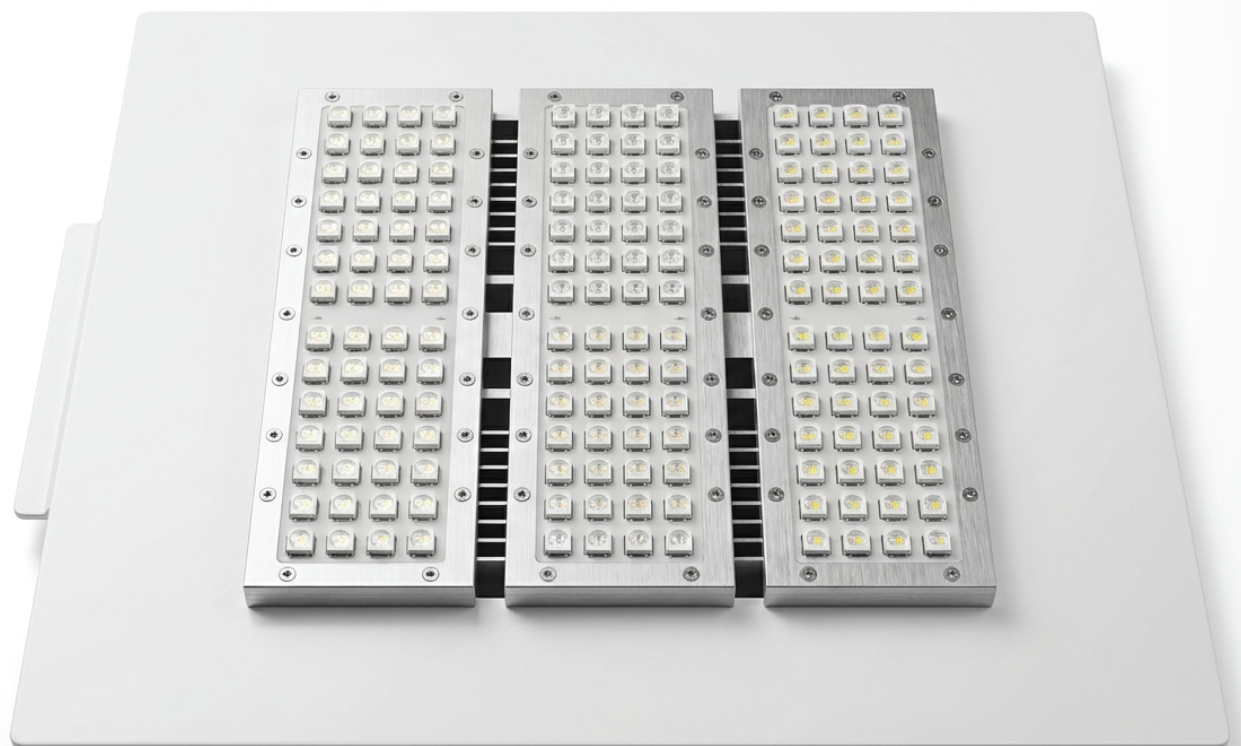



- 01 | ORDER CODE
- 02 | DIMENSIONS (MM)

- NSL-UCAN-V1-50W-XXK-SMD-TD-XX-IP65
- L 285 W 95

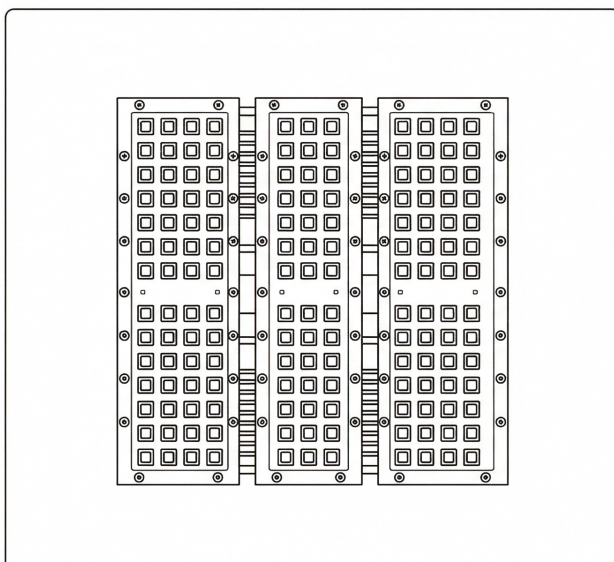

03	GENERAL PROUDUCT DISCRIPTION	Canopy lighting solution for gas stations and warehouses, with a wide beam angle of 85°×140° and uniform light distribution. Offers thermal protection and corrosion-resistant housing.	
04	FEATURES	<ul style="list-style-type: none">• Fixture designed for harsh and hot environments.• High lumen output. Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and anti-aging fixture.• Over temperature protection, overload protection, short-circuit protection, and no-load protection.	
05	TECHNICAL DATA	Input Voltage	220 - 240 V A C
		Frequency	50 / 60Hz
		Power Factor	>98%
		CCT	2700K, 3000K, 4000K, 6000K
		CRI	>80%
		LED Efficiency	120-130Lm/W
		Power Supply	Tridonic / Philips
		LED Type	Osram / Philips
		Materials	Aluminum, PC, & Friendly material
		Beam Angle	85° / 147°
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +85°C
		Certifications	CE, SELV and ISO
		Mounting	Recessed
		IP Rating	IP65
		Dimmable	On Request
		Emergency	On Request
		Warranty	5 Years

06	APPLICATIONS	Ideal for Gas Station, Factory, Industrial Area, Shopping Center, Green House, Football field, Car Park, Warehouse, General Lighting etc.
----	---------------------	---



07	PHOTOMETRIC DATA
----	------------------

