

LED SLIM WALL WASHER SPI RGBW

Data Sheet Document.



IP
67

5Y
WAR

19.55 W/M

CRI
>80

50.000
HOURS





01 ORDER CODE

02 DIMENSIONS (MM)

• NSL-WW-SLIM-SPI-23W/M-RGBW-IP65

• W28 H30 L850 mm

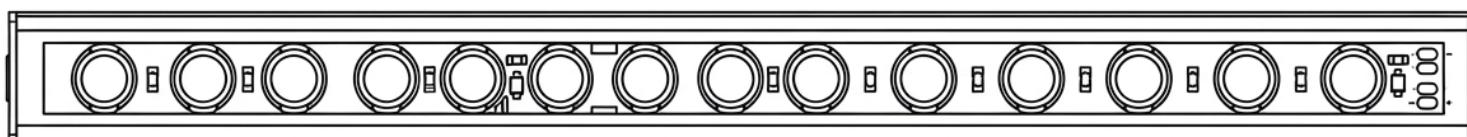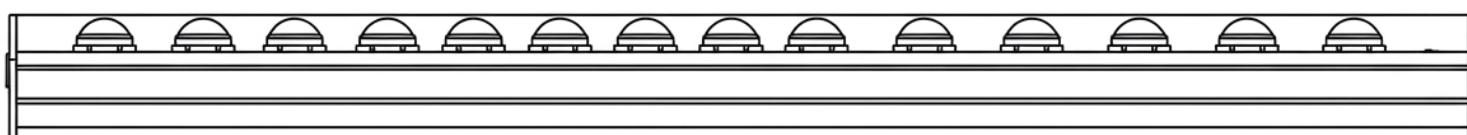

03	GENERAL PRODUCT DESCRIPTION	Wall washer designed for facade and architectural lighting with SPI control and 16 bit color resolution. It features reinforced optical lenses and delivers flexible light distribution angles up to 60°. Suitable for both wall and surface mounting, this fixture is ideal for dynamic outdoor lighting effects with high visual impact.
04	ADDITIONAL TECHNICAL INFORMATION	<p>Power Source 220-240 VAC, 50/60Hz</p> <p>LED Type Osram 2835 SMD</p> <p>Low tolerances for colour temperature MacAdam 3</p> <p>Humidity Storage 10-80%</p> <p>IK Code IK01</p> <p>Dimmable Yes</p>
05	TECHNICAL DATA	<p>Operating Voltage DC 24V</p> <p>Control SPI</p> <p>Color Resolution 16bit</p> <p>CCT RGBW</p> <p>CRI 80%</p> <p>Pixel Pitch Customize</p> <p>Power Supply Tridonic / Nassli</p> <p>LED Type Cree 5050 SMD</p> <p>Housing Aluminum</p> <p>Color Frame Silver</p> <p>Beam Angle 45°, 60°, 10×45°, 10×60°</p> <p>Life Time 80,000 Hour</p> <p>Operating Temp -35°C to +60°C</p> <p>Storage Temp -40°C to +70°C</p> <p>Optical Lens Tempered Glass</p> <p>Mounting Wall Mounted / Surface Mounted</p> <p>IP Rating IP65</p> <p>Dimensions W27.5 × H18.6 × L850 mm</p> <p>Beam Angle 40 × 45°</p> <p>Warranty 5 Years</p> <p>Power 19.55W</p>
06	APPLICATIONS	<ul style="list-style-type: none"> It can be widely used for decoration in shopping malls, palaces, trade shows, supermarkets, conference halls, hotels, schools, hospitals, meeting rooms, factories, theaters, cinemas, kitchens, and corridors, etc.
07	PHOTOMETRIC DATA	<div style="display: flex; justify-content: space-around; align-items: center;">  General Lighting  Football Field  Street Lamp  Factory Lighting  Green House  Industrial Area  Car Park  Warehouse </div>