

LED STRIP LIGHT YT 02

Data Sheet Document.

IP
67

5Y
WAR

21 W

CRI
>80

50.000
HOURS







01 ORDER CODE

02 DIMENSIONS (MM)

- NSL-YT-SPI-21 w/m-RGBW-5050-IP67
- XX*20*14



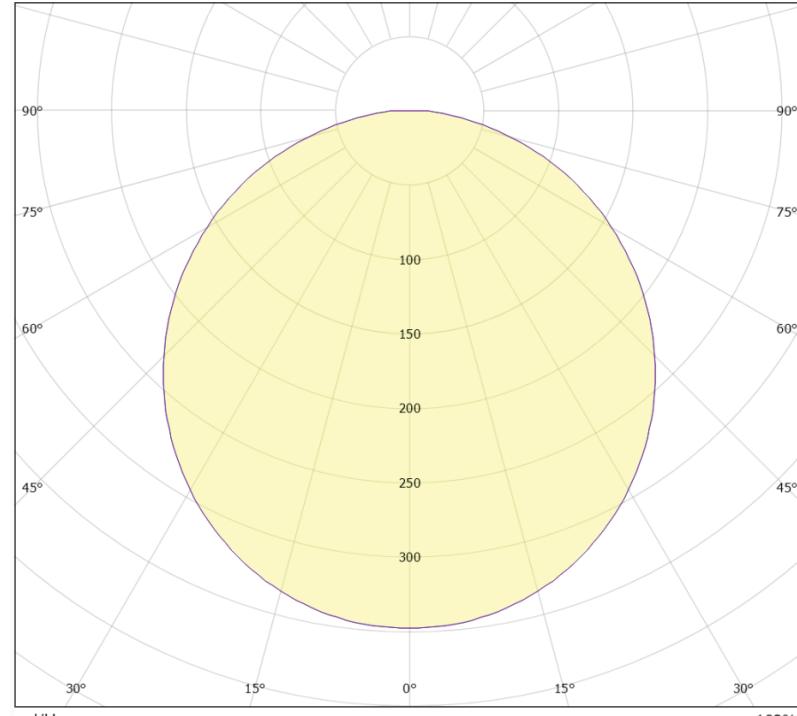03	GENERAL PRODUCT DESCRIPTION	Flexible LED strip lighting solution designed for continuous linear illumination with uniform light output and minimal glare. Suitable for architectural details, coves, shelves, and decorative applications. Provides stable performance, high luminous efficiency, and excellent color uniformity, making it ideal for both residential and commercial environments.																												
04	FEATURES	<ul style="list-style-type: none"> LED strip lighting is becoming an immensely popular modern decorating style that a lot of people are now enjoying. . 																												
05	TECHNICAL DATA	<table> <tbody> <tr> <td>Input Voltage</td><td>24 VDC</td></tr> <tr> <td>Power factor</td><td>>90%</td></tr> <tr> <td>CCT</td><td>RGBW</td></tr> <tr> <td>CRI</td><td>>80%</td></tr> <tr> <td>LED Type</td><td>Osram</td></tr> <tr> <td>Materials</td><td>PC, & Friendly material</td></tr> <tr> <td>Beam Angle</td><td>180°</td></tr> <tr> <td>Life Time</td><td>>50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +85°C</td></tr> <tr> <td>Certifications</td><td>CE, SELV, SASO</td></tr> <tr> <td>Mounting</td><td>Surface Mounted</td></tr> <tr> <td>IP Rating</td><td>IP67</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </tbody> </table>	Input Voltage	24 VDC	Power factor	>90%	CCT	RGBW	CRI	>80%	LED Type	Osram	Materials	PC, & Friendly material	Beam Angle	180°	Life Time	>50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +85°C	Certifications	CE, SELV, SASO	Mounting	Surface Mounted	IP Rating	IP67	Warranty	5 Years
Input Voltage	24 VDC																													
Power factor	>90%																													
CCT	RGBW																													
CRI	>80%																													
LED Type	Osram																													
Materials	PC, & Friendly material																													
Beam Angle	180°																													
Life Time	>50,000 Hour																													
Operating Temp	-20°C to +55°C																													
Storage Temp	-40°C to +85°C																													
Certifications	CE, SELV, SASO																													
Mounting	Surface Mounted																													
IP Rating	IP67																													
Warranty	5 Years																													
06	APPLICATIONS	<p>It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room, Factories, Theater, Cinemas and Corridor etc...</p> <div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">  General Lighting </div> <div style="text-align: center;">  Football Field </div> <div style="text-align: center;">  Street Lamp </div> <div style="text-align: center;">  Factory Lighting </div> <div style="text-align: center;">  Green House </div> <div style="text-align: center;">  Industrial Area </div> <div style="text-align: center;">  Car Park </div> <div style="text-align: center;">  Ware house </div> </div>																												
07	PHOTOMETRIC DATA	 <p>cd/klm</p> <p>$\eta = 102\%$</p>																												