NASSLI CATALOGUE

 $\textbf{Manufacturing} \ is \ a \ design \ practice \ that \ works \ along side$ those with a passion for design and **production**

LED STRIP LIGHT


20-67

5Y WAR

21W/M

CRI >80

50,000 HOURS

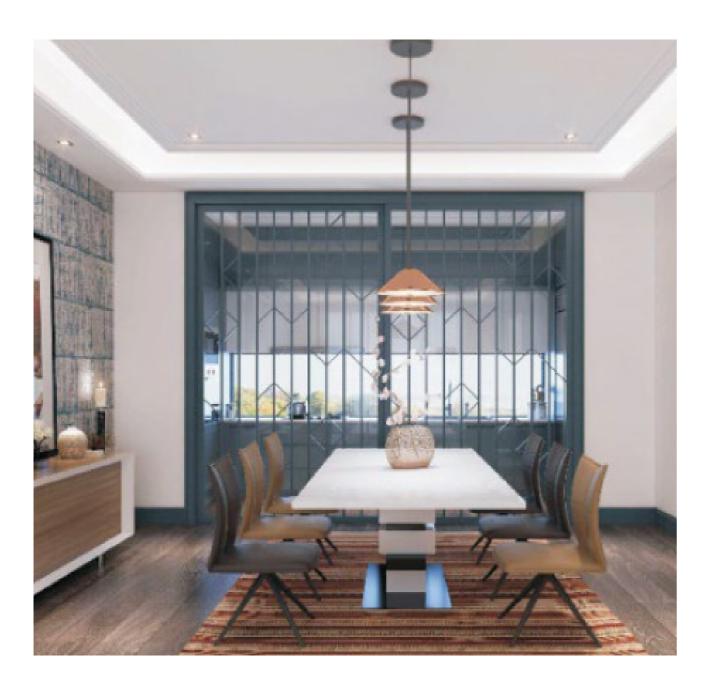







Application

- 1. Cove lighting
- 2. Architectural lights for canopy, corridor, window, archway
- 3. Backlight or edge lighting for signage
- 4. DIY lights for home use
- 5. Path and contour marking
- 6. Building facade lighting

Technical Data

Power Source: 220-240 VAC 50/60HZ

LED Type: Osram 2835 SMD

Low tolerances for colour tempereature: MacAdam 3

Humidity Storage: 10-80%

IK Code: IK01

Dimmable: DAL

Product Details

Input Voltage	Dc24V
сст	RGBW
CRI	>80%
Power	21W/M
Power Supply	Tridonic / Nassli
Materials	PC, & Friendly material
Life Time	>50,000 Hour
Operating Temp	-20°C to +50°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
IP Rating	IP20-67
Dimmable	Yes
Emergency	No
Warranty	5 Years

Order Code

NSL-STR-21 W/M - RGBW-5050-IPXX