LED TRACK LIGHT

Data Sheet Documents

-



IP
20

5Y
WAR

CRI
>80 / >90

50.000
HOURS



01	**ORDER CODE**	• NSL-TL-134-T3-15W-XXK-TD-XX-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM
01	**ORDER CODE**	• NSL-TL-134-T3-15W-XXK-NS-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM
01	**ORDER CODE**	• NSL-TL-134-T3-20W-XXK-NS-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM
01	**ORDER CODE**	• NSL-TL-134-T3-25W-XXK-TD-XX-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM
01	**ORDER CODE**	• NSL-TL-134-T3-25W-XXK-NS-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM
01	**ORDER CODE**	• NSL-TL-134-T3-25W-XXK-PH-XX-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM
01	**ORDER CODE**	• NSL-TL-134-T3-30W-XXK-TD-XX-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM
01	**ORDER CODE**	• NSL-TL-134-T3-30W-XXK-NS-IP20
02	**DIMENSIONS (MM)**	• Ø95X165 MM

03 GENERAL PRODUCT DESCRIPTION

Sleek cylindrical LED track light with a fully adjustable head delivering precise, directional illumination wherever it's needed. Available up to 30W with CRI 80/90 for vivid, accurate color rendering, rated for 50,000 hours and backed by a 5-year warranty.

04 FEATURES

The most common form of track lighting still consists of straight pieces of track that are attached directly to the surface of the wall or ceiling. They come with a piece that connects to a ceiling outlet, special -90degree pieces for making turns, couplers to join two straight pieces together, and a "dead end" to safely cap the track at its end, but there are also curved or wave track fixtures as well as ones that are suspended below the ceiling.

05 TECHNICAL DATA


Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
Power factor	80%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80% / 90%
LED Efficiency	100Lm/W
Wattage	15 / 25 / 30 W
Lumen	1500 / 2500 / 3000 Lm
Power supply	Tradonic / Nassli
LED Type	Bridgelux
Materials	Di Cast Aluminum |Housing
Beam Angle	Adjustable 15° / 60°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +65°C
Certifications	CE, SELV and ISO
Mounting	On Track
IP Rating	IP20
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas and Corridor etc.



07 PHOTOMETRIC DATA

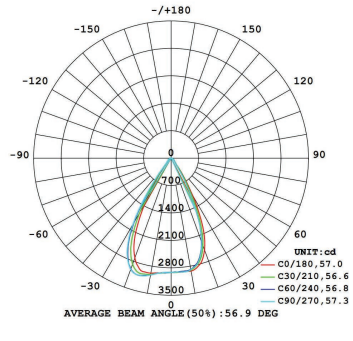

30W