LED TUBE

Data Sheet Documents

IP
20

5Y
WAR


CRI
80% - 90%

50.000
HOURS





01	ORDER CODE	• NSL-LTUV2-60T8-11W-XXK-SMD-ZY-IP20
02	DIMENSIONS (MM)	• L600 X D30
01	ORDER CODE	• NSL-LTUV2-120T8-14W-XXK-SMD-ZY-IP20
02	DIMENSIONS (MM)	• L1200 X D30
01	ORDER CODE	• NSL-LTUV2-120T8-18W-XXK-SMD-ZY-IP20
02	DIMENSIONS (MM)	• L1200 X D30
01	ORDER CODE	• NSL-LTUV2-120T8-20W-XXK-SMD-LF-IP20
02	DIMENSIONS (MM)	• L1200 X D30
01	ORDER CODE	• NSL-LTUV2-120T8-20W-XXK-SMD-ZY-IP20
02	DIMENSIONS (MM)	• L1200 X D30
01	ORDER CODE	• NSL-LTUV1-120T8-22W-XXK-SMD-LF-IP20
02	DIMENSIONS (MM)	• L1200 X D30
01	ORDER CODE	• NSL-LTUV2-150T8-30W-XXK-SMD-ZY-IP20
02	DIMENSIONS (MM)	• L1500 X D30

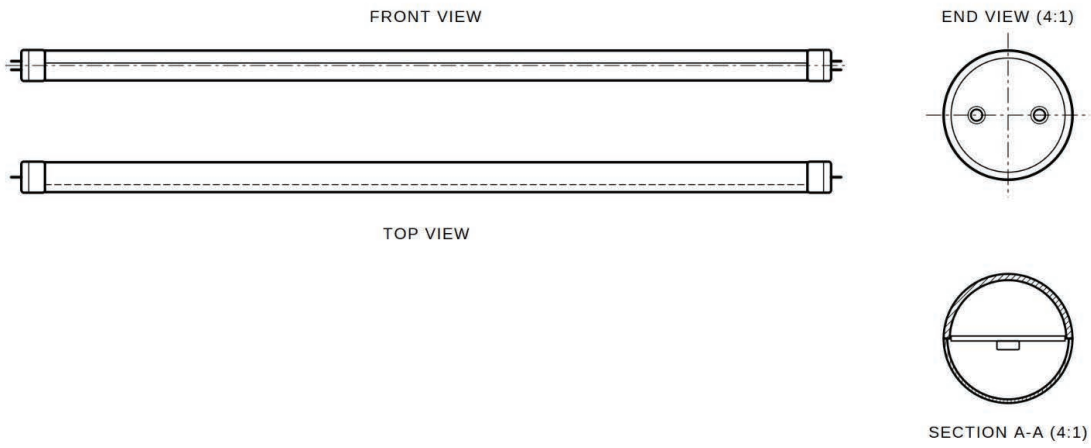

03 GENERAL PRODUCT DESCRIPTION

High-efficiency 11/14/18/20/22/30W T8 LED tube delivering bright, uniform illumination as a direct energy-saving replacement for traditional fluorescent tubes with zero warm-up time and instant full brightness. Featuring CRI 80/90 for clear, accurate color rendering and IP20-rated construction, it's rated for 50,000 hours of dependable performance and backed by a 5-year warranty

04 FEATURES

Instant full-brightness illumination with zero flicker and zero warm-up time, delivering a smooth, uniform glare-free light output along the entire tube length for a comfortable and productive environment in any commercial or retail setting.

05 TECHNICAL DATA

Input Voltage	220-240 VAC
Frequency	50/60 Hz
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80% - 90%
LED Efficiency	100Lm/W
Wattage	11/14/18/20/22/30W
Lumen	1000/14000/18000/20000/22000/30000Lm
Power supply	Nassli / LF / ZY
LED Type	OSRAM / EPISTAR
Materials	PC
Beam Angle	165°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall Mouting, Surface, Suspended
IP Rating	IP20
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

warehouses, factories, car parks, cold storage, food processing areas, and any demanding industrial or commercial space where reliability and performance are essential.

