LED TWIN SPOT LIGHT 3X7WATT

Data Sheet Documents


IP
20

5Y
WAR


CRI
80%-90%

50.000
HOURS



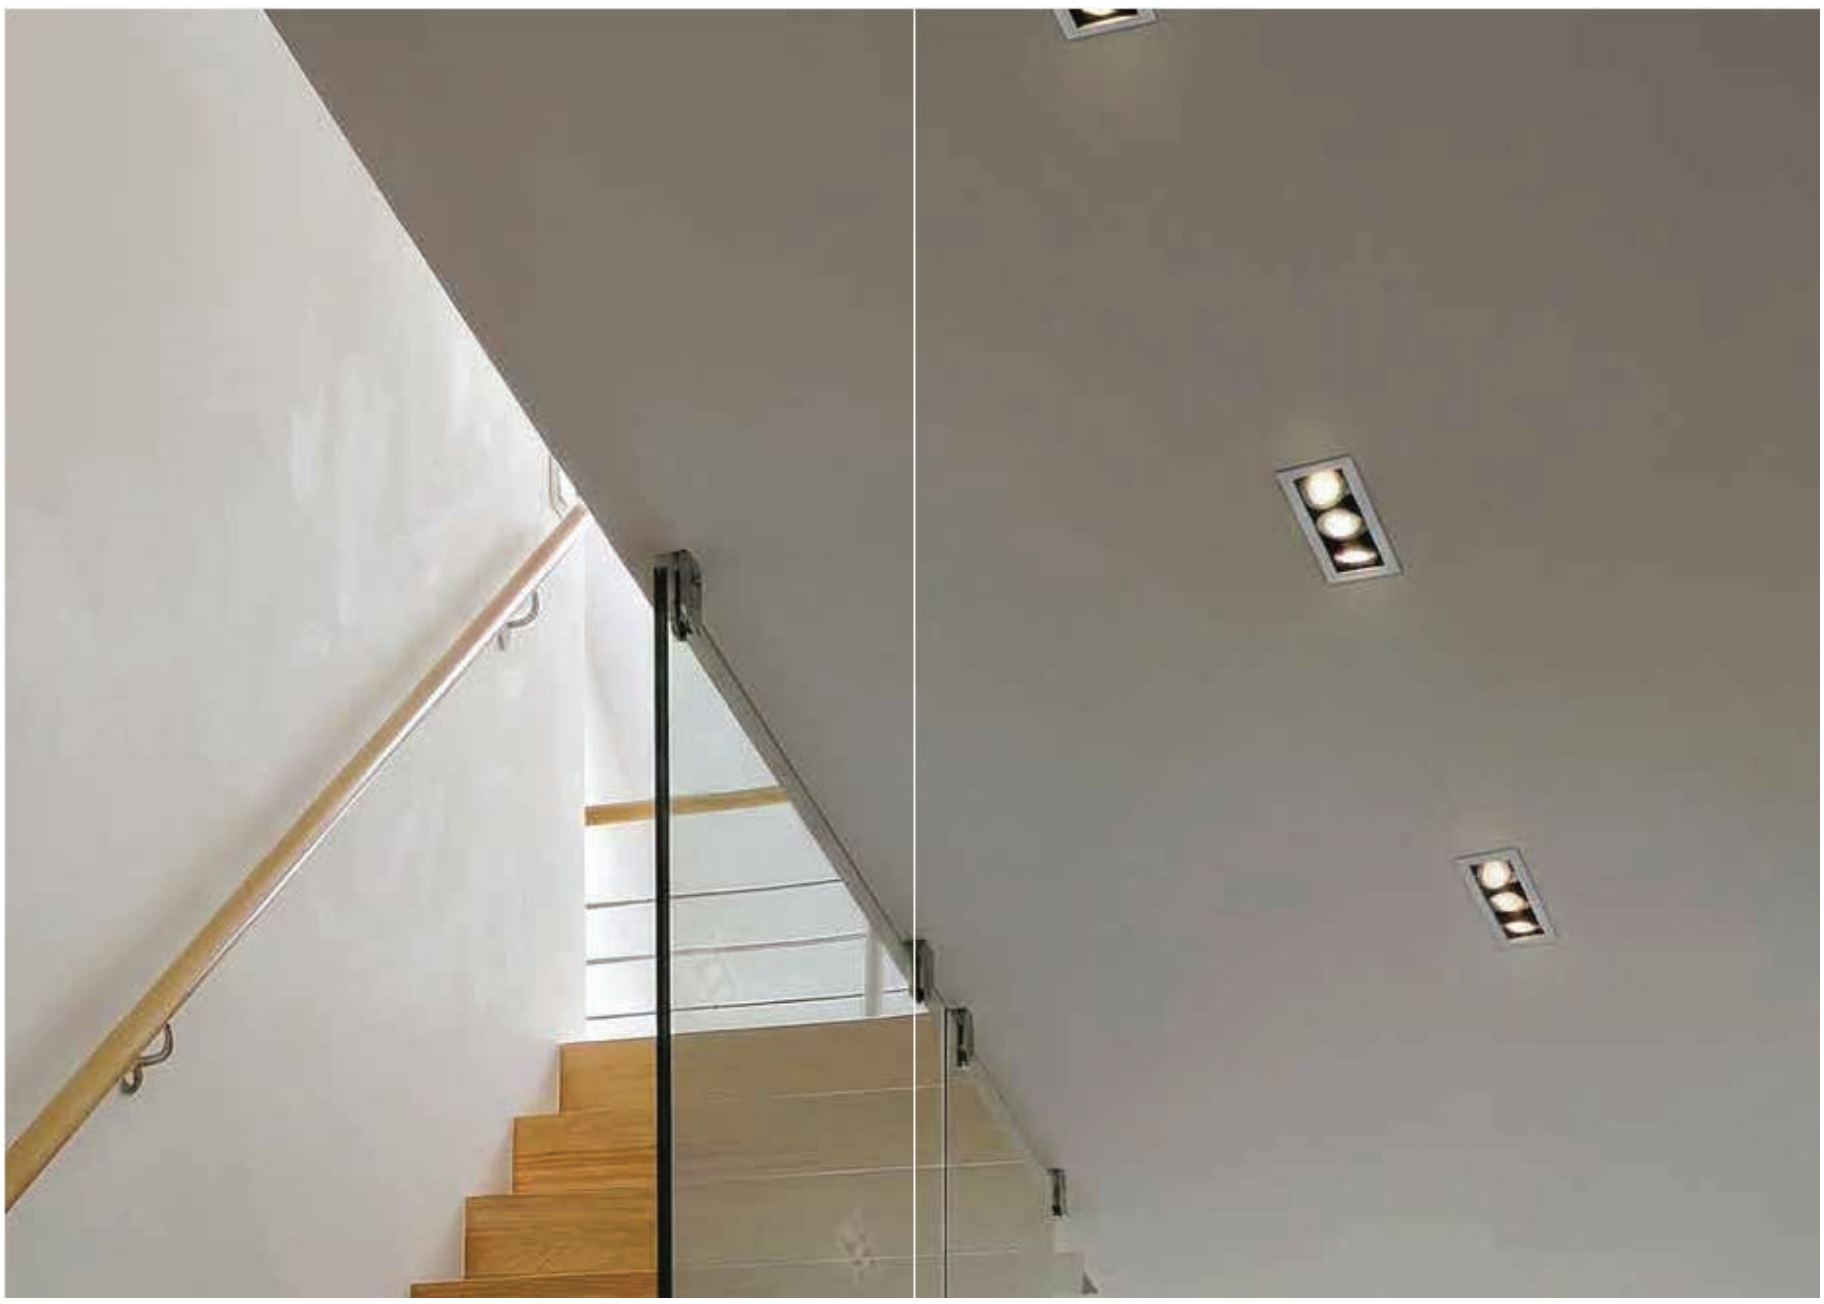

01	ORDER CODE	• NSL-SPL-MR16-50-3X7W-XX-SMD-LENS-TD-XX-IP20
02	DIMENSIONS(MM)	• CUT OUT: 100*270MM OUTER SIZE: 123*300MM

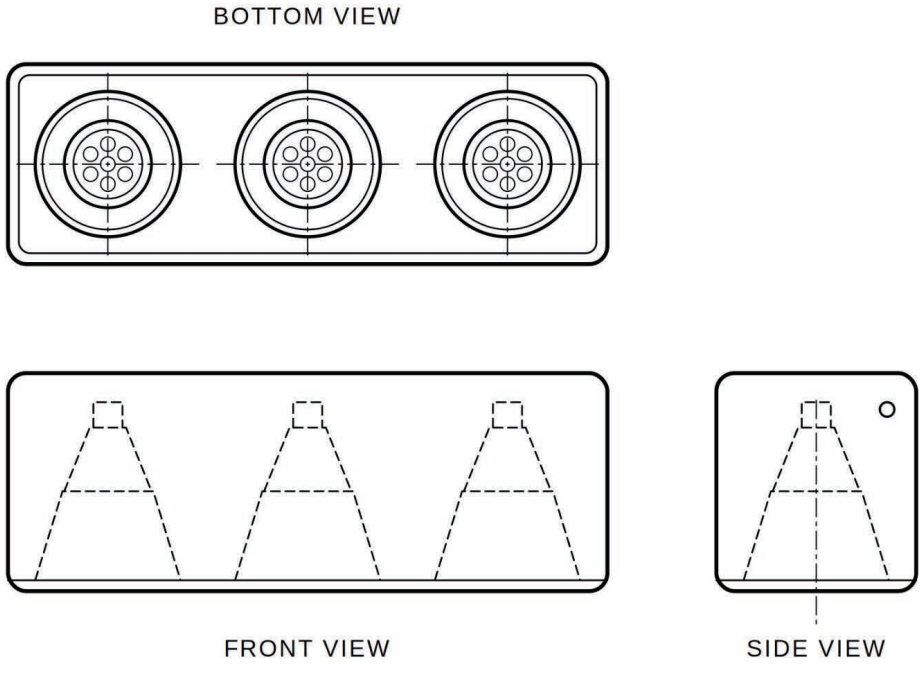

GENERAL PRODUCT DESCRIPTION

Versatile 3*7W LED surface-mounted spotlight available in single-, double-, and triple-head configurations, with a choice of black or white compact housing with CRI >80/90 for vivid, accurate color rendering, while the compact cube body sits discreetly on any ceiling or wall surface without compromise. IP20-rated, rated for 50,000 hours, and backed by a 5-year warranty.

04 FEATURES

delivering precise, focused accent illumination with exceptional flexibility to suit any interior layout and design style. Each individually aimed LED head produces a sharp, controlled anti-glare beam.

05 TECHNICAL DATA

Input Voltage	220-240VAc
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80%-90%
Wattage	3*7W/M
Led efficacy	100 LM/W
Lumen	3*700 Lm
Power supply	NASSLI
Power Factor	90%
LED Type	LUMILEDS
Beam Angle	120˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV and ISO
Mounting	Recessed
IP Rating	IP20
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

Ideal for retail displays, galleries, hospitality spaces, residential accent lighting, and any interior

