

LED TWIN SPOT LIGHT 3x7W

Data Sheet Document.

IP
20


1Y
WAR

3*7 W
840 LMT

CRI
>80



50.000
HOURS



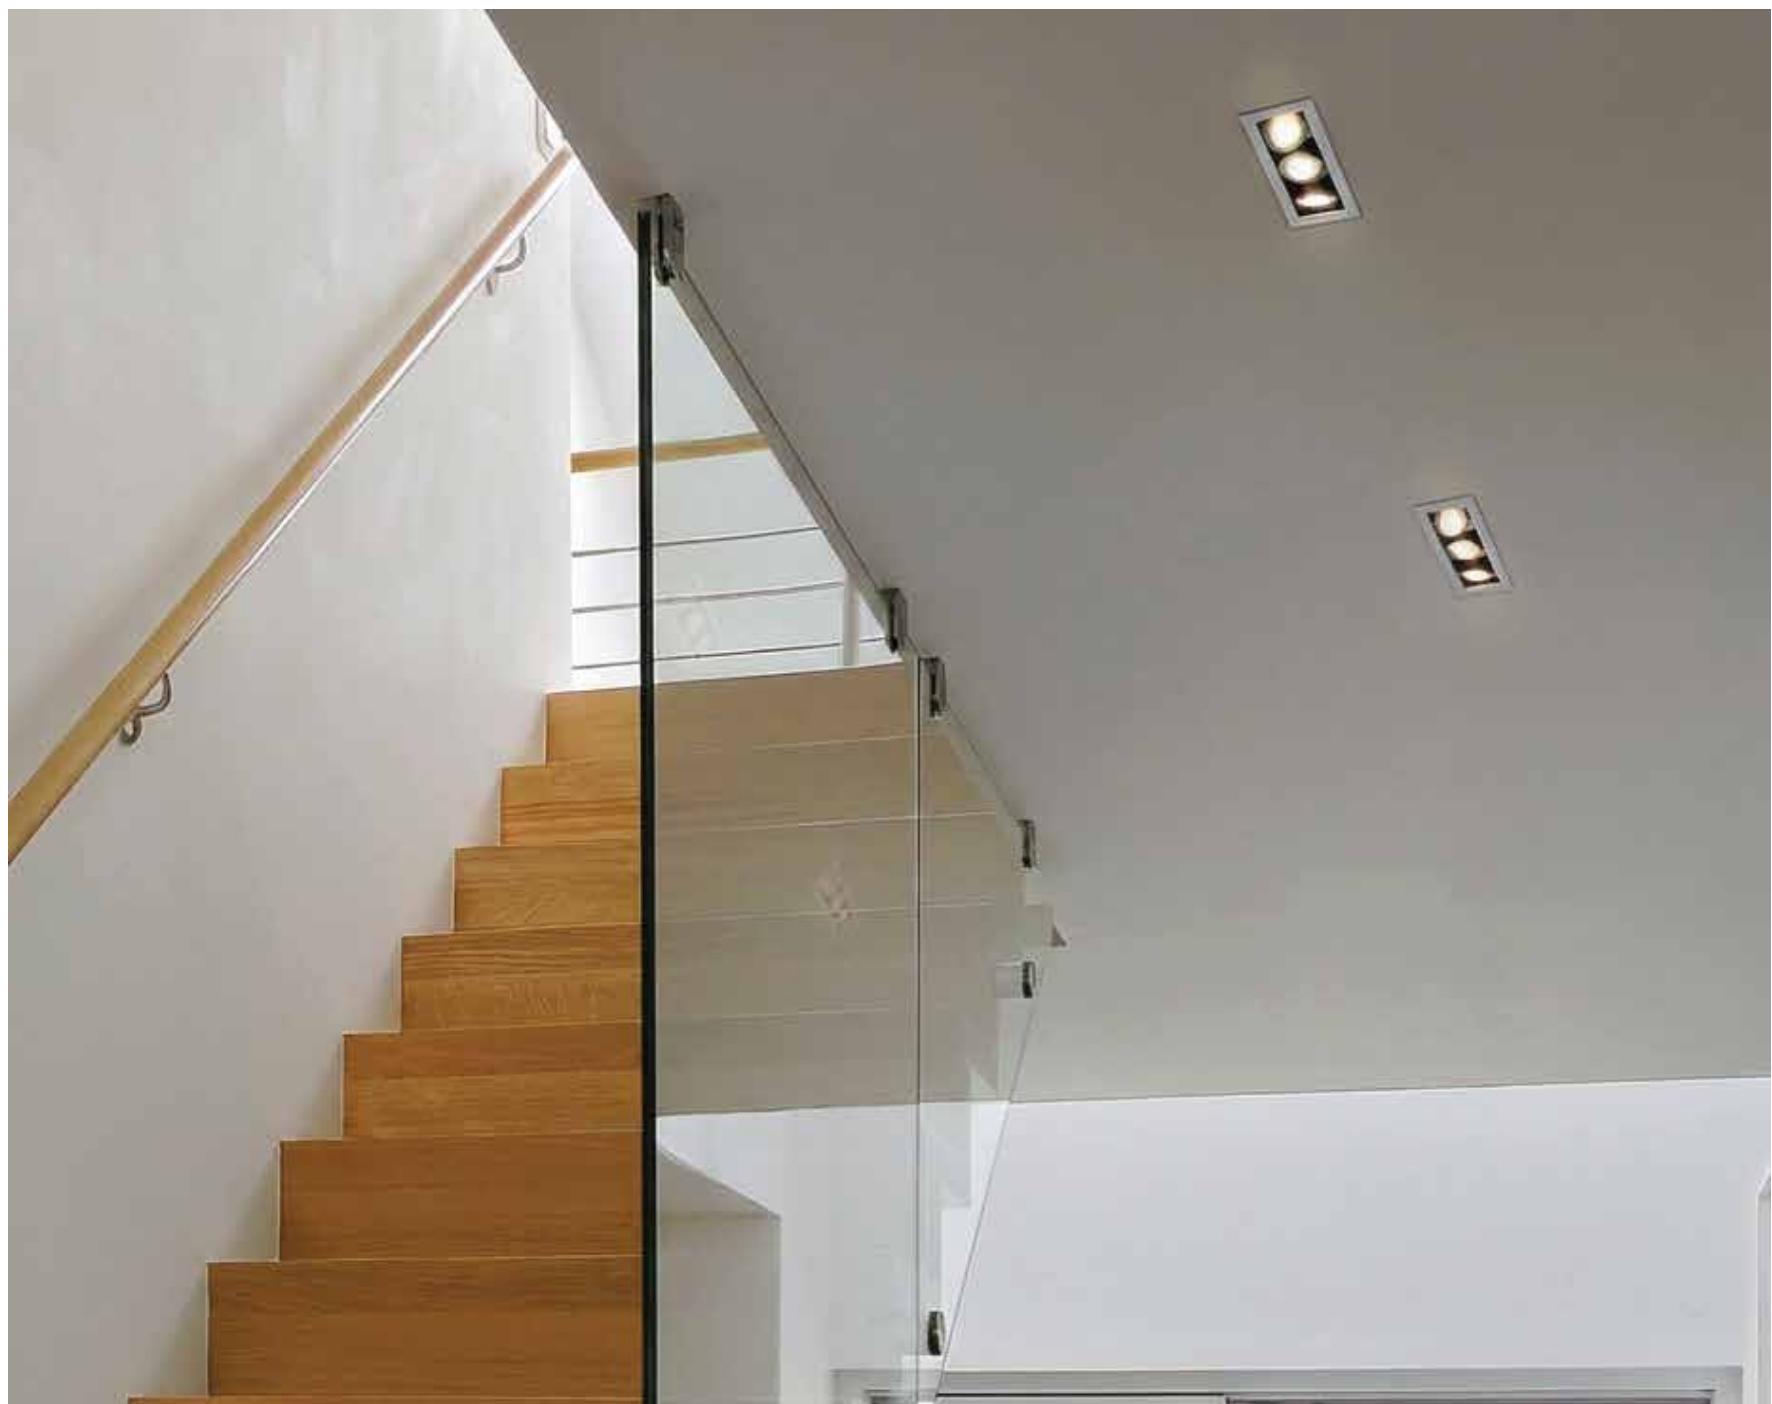

01 ORDER CODE

02 DIMENSIONS (MM)

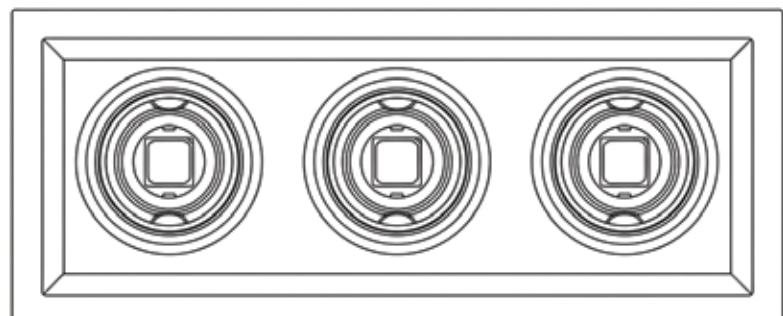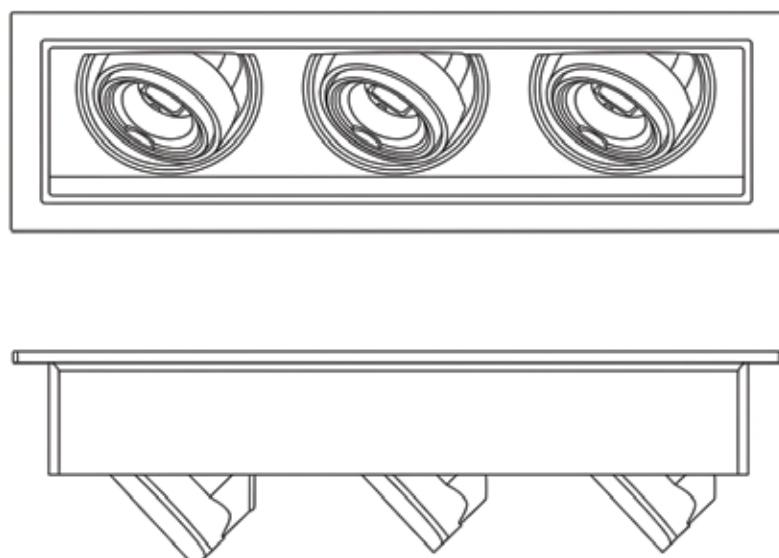

03	GENERAL PRODUCT DESCRIPTION	Dual-head spotlight with a power rating of 2×7W, utilizing Philips SMD LED chips. It provides flexible beam distribution ranging from 35° to 120°, making it ideal for accent lighting in galleries, exhibitions, and hotels. Built with a durable aluminum housing and designed for recessed installation.																																								
04	FEATURES	<ul style="list-style-type: none"> Power Source: 220-240 VAC 50 / 60HZ LED Type: Osram 2835 SMD Low tolerances for colour temperature: MacAdam 3 Humidity Storage: 10-80% IK Code: IK01 Dimmable: no (can be dimmable on request) 																																								
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td> <td>220-240 V AC</td> </tr> <tr> <td>Frequency</td> <td>50 / 60Hz</td> </tr> <tr> <td>CCT</td> <td>3000K, 4000K, 5000K, 6000K</td> </tr> <tr> <td>CRI</td> <td>80%</td> </tr> <tr> <td>LED Efficiency</td> <td>110-130 lm/W</td> </tr> <tr> <td>Power</td> <td>3 × 7W</td> </tr> <tr> <td>Power Supply</td> <td>Tridonic / Nassli</td> </tr> <tr> <td>Flux</td> <td>3 × 770 lm</td> </tr> <tr> <td>LED Type</td> <td>Philips 3030 SMD</td> </tr> <tr> <td>Materials</td> <td>Aluminum, PC & friendly material</td> </tr> <tr> <td>Beam Angle</td> <td>35°-120°</td> </tr> <tr> <td>Life Time</td> <td>50,000 Hour</td> </tr> <tr> <td>Operating Temp</td> <td>-20°C to +55°C</td> </tr> <tr> <td>Storage Temp</td> <td>-40°C to +85°C</td> </tr> <tr> <td>Certifications</td> <td>CE, SELV and ISO</td> </tr> <tr> <td>Mounting</td> <td>Recessed</td> </tr> <tr> <td>IP Rating:</td> <td>IP20</td> </tr> <tr> <td>Dimmable</td> <td>On request</td> </tr> <tr> <td>Emergency</td> <td>On request</td> </tr> <tr> <td>Warranty</td> <td>5 Years</td> </tr> </table>	Input Voltage	220-240 V AC	Frequency	50 / 60Hz	CCT	3000K, 4000K, 5000K, 6000K	CRI	80%	LED Efficiency	110-130 lm/W	Power	3 × 7W	Power Supply	Tridonic / Nassli	Flux	3 × 770 lm	LED Type	Philips 3030 SMD	Materials	Aluminum, PC & friendly material	Beam Angle	35°-120°	Life Time	50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +85°C	Certifications	CE, SELV and ISO	Mounting	Recessed	IP Rating:	IP20	Dimmable	On request	Emergency	On request	Warranty	5 Years
Input Voltage	220-240 V AC																																									
Frequency	50 / 60Hz																																									
CCT	3000K, 4000K, 5000K, 6000K																																									
CRI	80%																																									
LED Efficiency	110-130 lm/W																																									
Power	3 × 7W																																									
Power Supply	Tridonic / Nassli																																									
Flux	3 × 770 lm																																									
LED Type	Philips 3030 SMD																																									
Materials	Aluminum, PC & friendly material																																									
Beam Angle	35°-120°																																									
Life Time	50,000 Hour																																									
Operating Temp	-20°C to +55°C																																									
Storage Temp	-40°C to +85°C																																									
Certifications	CE, SELV and ISO																																									
Mounting	Recessed																																									
IP Rating:	IP20																																									
Dimmable	On request																																									
Emergency	On request																																									
Warranty	5 Years																																									
06	APPLICATIONS	It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas and Corridor etc...																																								
	 General Lighting	 Football Field	 Street Lamp	 Factory Lighting	 Green House	 Industrial Area	 Car Park	 Ware house																																		

07 PHOTOMETRIC DATA

