$\textbf{Manufacturing} \ is \ a \ design \ practice \ that \ works \ along side$ those with a passion for design and **production**


LED TUBE

IP 20

11-30

>80

50,000 HOURS

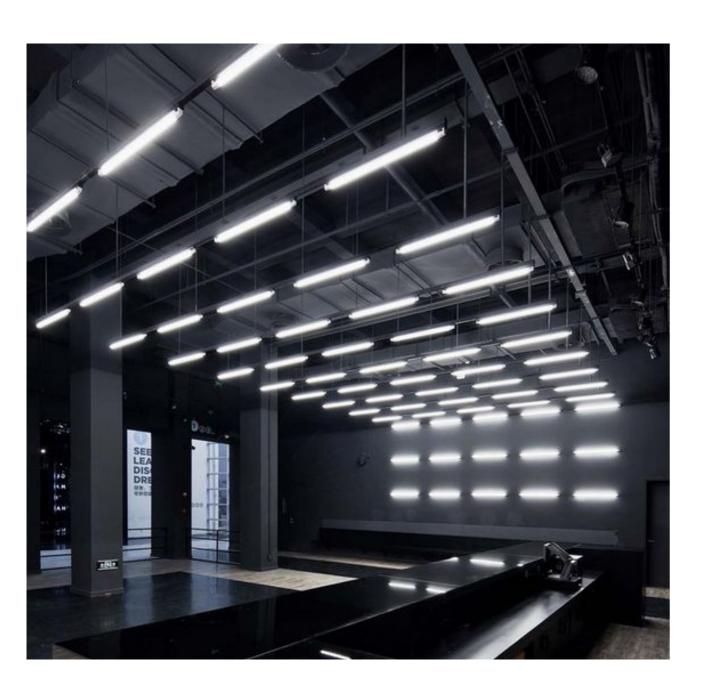

$\textbf{Manufacturing} \ is \ a \ design \ practice \ that \ works \ along side$ those with a passion for design and **production**







Application

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room, Theater, Cinemas, Kitchens and Corridor.

Feature

LED Linear Light designed for Harsh and hot environments, High lumen output. Power saving as it replace the sodium metal halide so it it save between 5% to 75% of the consumed power.

Unlimited number of on/off switching cycles, Aluminum heat dissipation module has surface anodic oxidation process to make it very resistant and ant-aging fixture.

Over temperature protection, overload protection short circuit protection and no load protection.

Product Details

Input Voltage	220 - 240 VAC / 85-305 VAC
Frequency	50 / 60Hz
Power Factor	>98%
ССТ	2700K, 3000K, 4000K, 6000K
CRI	>80%
LED Efficiency	120-130Lm/WLm/W
Power Supply	Nassli
LED Type	Osram / Bridgelux
Materials	Aluminum, PC, & Friendly material
Beam Angle	160°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall Mouting, Surface, Suspended
IP Rating	IP20
Dimmable:	N/A
Emergency	On Request
Warranty	5 Years

Power (Watt)	Dimensions Lumen
11W	 L667 x W125 x H85 1210
Order Code	NSL-LTUV2-60T8-11W-XXK-SMD-ZY-IP20

Power (Watt)	Dimensions Lumen
14W	 L1267 x W125 x H85 1540
Order Code	NSL-LTUV2-120T8-14W-XXK-SMD-ZY-IP20

Power (Watt)	Dimensions Lumen
18W	 L1267 x W125 x H85 1980
Order Code	NSL-LTUV2-120T8-18W-XXK-SMD-ZY-IP20

20W L1267 x W125 x H85	
	2200
Order Code NSL-LTUV2-120T8-20W-XXK-SMD-LF-IP20	
Order Code NSL-LTUV2-120T8-20W-XXK-SMD-ZY-IP20	

Power (Watt)	Dimensions Lumen
22W	L1267 x W125 x H85 2420
Order Code	NSL-LTUV1-120T8-22W-XXK-SMD-LF-IP20

Power (Watt)	Dimensions Lumen
30W	L1567×W125×H85 3300
Order Code	NSL-LTUV2-150T8-30W-XXK-SMD-ZY-IP20