

LED UP&DOWN LIGHT

Data Sheet Document.

IP
65

5Y
WAR

14-24 W

CRI
>80

50.000
HOURS








01 ORDER CODE

02 DIMENSIONS (MM)

• NSL-UDL-2x7W-XXK-COB-ZY-IP65

• W65 L260

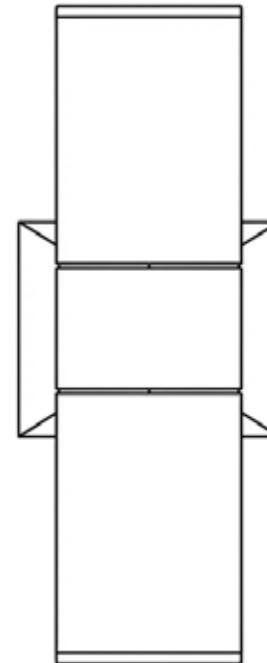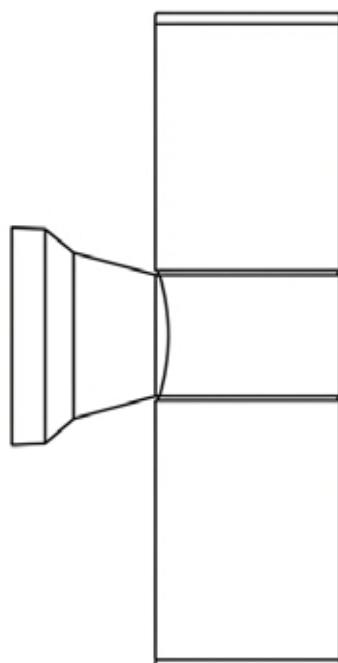
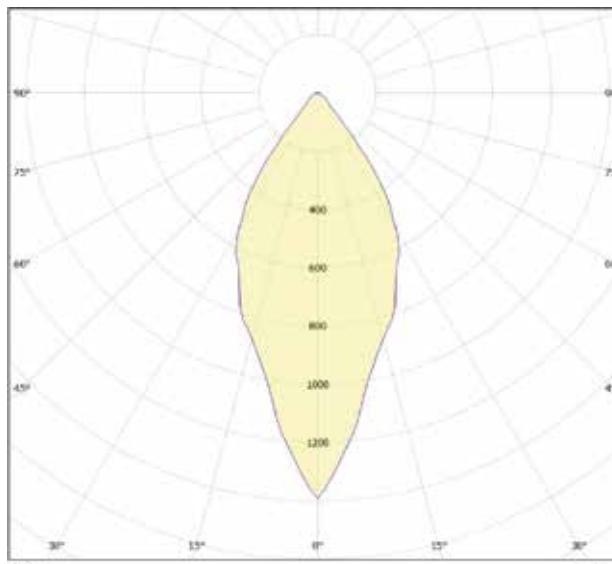
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------|---|--|--|--|--|--|---|---|-----|---------------------------------|-----|-----|----------------|-------------|--------------|--------|----------|--------------|-----------|-----------------------------------|-------------|--------|------------|----------------|-----------|-------------|----------------|----------------|--------------|----------------|----------------|----|----------|-----------------|-----------|------|----------|------------|-----------|------------|----------|---------|
| 03 | GENERAL PRODUCT DESCRIPTION | Architectural-grade wall-mounted luminaire that delivers dual-beam illumination upward and downward, ideal for façade accent lighting. Built with high-thermal-conductivity aluminum for optimal heat dissipation, it ensures energy-efficient performance with luminous efficacy up to 95 lm/W. Its weather-resistant construction (IP65) makes it suitable for exterior use, adding both style and security to building exteriors. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 04 | FEATURES | <ul style="list-style-type: none"> The product is used as a pure light source using LED technology, human and environment friendly, no Pb, Hg nor UV. Does not cause any flickering or electromagnetic interference. High power saving fixture, no decay, and no color temperature shift. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 05 | TECHNICAL DATA | <table> <tr> <td>Input Voltage</td><td>220 – 240 V AC</td></tr> <tr> <td>Frequency</td><td>50 / 60Hz</td></tr> <tr> <td>Power Factor</td><td>95%</td></tr> <tr> <td>CCT</td><td>3000K, 4000K, 5000K, 6000K, RGB</td></tr> <tr> <td>CRI</td><td>80%</td></tr> <tr> <td>LED Efficiency</td><td>120-130Lm/W</td></tr> <tr> <td>Power Supply</td><td>Nassli</td></tr> <tr> <td>LED Type</td><td>Osram / Cree</td></tr> <tr> <td>Materials</td><td>Aluminum, PC, & Friendly material</td></tr> <tr> <td>Color Frame</td><td>Silver</td></tr> <tr> <td>Beam Angle</td><td>10°, 30°, 120°</td></tr> <tr> <td>Life Time</td><td>50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +85°C</td></tr> <tr> <td>Certifications</td><td>CE</td></tr> <tr> <td>Mounting</td><td>Ground Recessed</td></tr> <tr> <td>IP Rating</td><td>IP65</td></tr> <tr> <td>Dimmable</td><td>On Request</td></tr> <tr> <td>Emergency</td><td>On Request</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </table> | Input Voltage | 220 – 240 V AC | Frequency | 50 / 60Hz | Power Factor | 95% | CCT | 3000K, 4000K, 5000K, 6000K, RGB | CRI | 80% | LED Efficiency | 120-130Lm/W | Power Supply | Nassli | LED Type | Osram / Cree | Materials | Aluminum, PC, & Friendly material | Color Frame | Silver | Beam Angle | 10°, 30°, 120° | Life Time | 50,000 Hour | Operating Temp | -20°C to +55°C | Storage Temp | -40°C to +85°C | Certifications | CE | Mounting | Ground Recessed | IP Rating | IP65 | Dimmable | On Request | Emergency | On Request | Warranty | 5 Years |
| Input Voltage | 220 – 240 V AC | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency | 50 / 60Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power Factor | 95% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CCT | 3000K, 4000K, 5000K, 6000K, RGB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CRI | 80% | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LED Efficiency | 120-130Lm/W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power Supply | Nassli | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| LED Type | Osram / Cree | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Materials | Aluminum, PC, & Friendly material | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Color Frame | Silver | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Beam Angle | 10°, 30°, 120° | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Life Time | 50,000 Hour | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating Temp | -20°C to +55°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Storage Temp | -40°C to +85°C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Certifications | CE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mounting | Ground Recessed | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| IP Rating | IP65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dimmable | On Request | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Emergency | On Request | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Warranty | 5 Years | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 06 | APPLICATIONS | It can be widely used for decoration in shopping malls, palaces, trade shows, supermarkets, conference halls, hotels, schools, hospitals, meeting rooms, factories, theaters, cinemas, and corridors, etc. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| |  General Lighting |  Football Field |  Street Lamp |  Factory Lighting |  Green House |  Industrial Area |  Car Park |  Ware house | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 07 | PHOTOMETRIC DATA |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |