

LED WALL MOUNTED LIGHT

Data Sheet Document.

IP
65

5Y
WAR

30-50 W

CRI
>80

50.000
HOURS








01 ORDER CODE

02 DIMENSIONS (MM)

- NSL-WML-320-30W-XXK-SMD-TD-XX-IP65
- 320X230X190

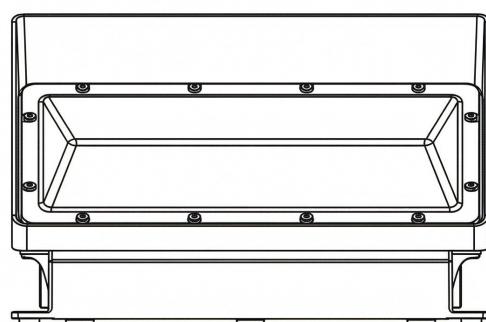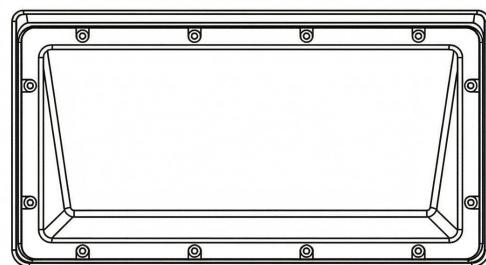

03	GENERAL PRODUCT DESCRIPTION	Wall mounted LED fixture that combines minimalist design with high luminous efficacy. Engineered to deliver up to 130 lm/W, it is ideal for illuminating architectural entrances, corridors, and exterior pathways. The fixture offers flexible CCT options to accommodate diverse lighting																																						
04	FEATURES	<ul style="list-style-type: none"> LED Wall Mounted Light is designed whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new Core Line Wall-mounted range of LED products can be used to replace traditional wall-mounted luminaires incorporating compact fluorescent lamps. The process of selecting, installing and maintaining is so easy, it's a simple switch. 																																						
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td><td>220 - 240 V A C</td></tr> <tr> <td>Frequency</td><td>50 / 60Hz</td></tr> <tr> <td>Power Factor</td><td>>98%</td></tr> <tr> <td>CCT</td><td>3000K, 4000K, 5000K, 6000K</td></tr> <tr> <td>CRI</td><td>>80%</td></tr> <tr> <td>LED Efficiency</td><td>120-130Lm/W</td></tr> <tr> <td>Power Supply</td><td>Tridonic / Nassli</td></tr> <tr> <td>LED Type</td><td>Osram / Philips</td></tr> <tr> <td>Materials</td><td>Aluminum, PC, & Friendly material</td></tr> <tr> <td>Beam Angle</td><td>160°</td></tr> <tr> <td>Life Time</td><td>>50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +85°C</td></tr> <tr> <td>Certifications</td><td>CE, SELV & ISO</td></tr> <tr> <td>Mounting</td><td>Wall Mounted</td></tr> <tr> <td>IP Rating</td><td>IP65</td></tr> <tr> <td>Dimmable</td><td>On Request</td></tr> <tr> <td>Emergency</td><td>On Request</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </table>	Input Voltage	220 - 240 V A C	Frequency	50 / 60Hz	Power Factor	>98%	CCT	3000K, 4000K, 5000K, 6000K	CRI	>80%	LED Efficiency	120-130Lm/W	Power Supply	Tridonic / Nassli	LED Type	Osram / Philips	Materials	Aluminum, PC, & Friendly material	Beam Angle	160°	Life Time	>50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +85°C	Certifications	CE, SELV & ISO	Mounting	Wall Mounted	IP Rating	IP65	Dimmable	On Request	Emergency	On Request	Warranty	5 Years
Input Voltage	220 - 240 V A C																																							
Frequency	50 / 60Hz																																							
Power Factor	>98%																																							
CCT	3000K, 4000K, 5000K, 6000K																																							
CRI	>80%																																							
LED Efficiency	120-130Lm/W																																							
Power Supply	Tridonic / Nassli																																							
LED Type	Osram / Philips																																							
Materials	Aluminum, PC, & Friendly material																																							
Beam Angle	160°																																							
Life Time	>50,000 Hour																																							
Operating Temp	-20°C to +55°C																																							
Storage Temp	-40°C to +85°C																																							
Certifications	CE, SELV & ISO																																							
Mounting	Wall Mounted																																							
IP Rating	IP65																																							
Dimmable	On Request																																							
Emergency	On Request																																							
Warranty	5 Years																																							
06	APPLICATIONS	It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room, Factories, Theater, Cinemas and Corridor etc...																																						
	 General Lighting	 Football Field	 Street Lamp	 Factory Lighting	 Green House	 Industrial Area	 Car Park	 Ware house																																
07	PHOTOMETRIC DATA	