

# LED WALL WASHER LIGHT

Data Sheet Document.

IP  
65

5Y  
WAR

10-15W  
1000 LMT

CRI  
>80

50.000  
HOURS






01 ORDER CODE

02 DIMENSIONS (MM)

• NSL-WW-100-18W-XXK-HIP-XD-DON-IP65

• L1000 W40 H38

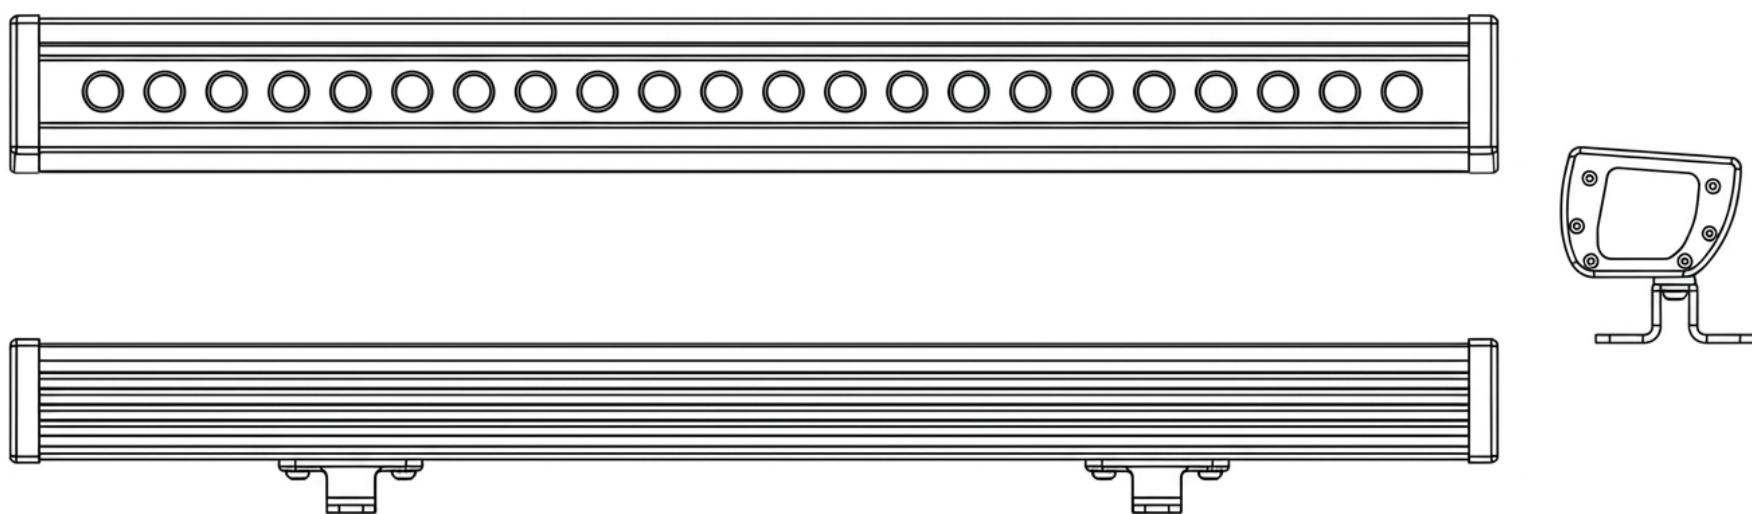

03	GENERAL PRODUCT DESCRIPTION	A linear LED lighting system designed for wall-mounted or surface-mounted installation. It delivers a directed light beam with selectable angles of (10°, 30°, 120°) to illuminate walls and building facades with high precision. Available in multiple color temperatures to suit aesthetic and artistic applications. Ideal for defining the visual edges of structures and highlighting their architectural character at night.																																								
04	FEATURES	<ul style="list-style-type: none"> <li>LED wall washer lights are also called as LED wall washer, which is designed as strip shape, but it's much different from LED strip lights.</li> <li>It's a new type of LED light fixtures to be used to illuminate the outdoor wall of building and cover up the stain and spot on the wall.</li> <li>In addition, they can help decorate and highlight the outline aesthetic of building for club, plaza, shopping mall and other public area and building.</li> </ul>																																								
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td><td>220-240 V AC</td></tr> <tr> <td>Frequency</td><td>50/60Hz</td></tr> <tr> <td>Power Factor</td><td>&gt;98%</td></tr> <tr> <td>CCT</td><td>3000K, 4000K, 5000K, 6000K</td></tr> <tr> <td>CRI</td><td>&gt;80%</td></tr> <tr> <td>LED Efficiency</td><td>120-130Lm/W</td></tr> <tr> <td>Power Supply</td><td>Tridonic / Nassli</td></tr> <tr> <td>LED Type</td><td>Osram / Cree</td></tr> <tr> <td>Materials</td><td>Aluminum, PC, &amp; Friendly material</td></tr> <tr> <td>Color Frame</td><td>Silver</td></tr> <tr> <td>Beam Angle</td><td>10°, 35°, 120°</td></tr> <tr> <td>Life Time</td><td>&gt;50,000 Hour</td></tr> <tr> <td>Operating Temp</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temp</td><td>-40°C to +85°C</td></tr> <tr> <td>Certifications</td><td>CE</td></tr> <tr> <td>Mounting</td><td>Wall Mounted/Surface Mounted</td></tr> <tr> <td>IP Rating</td><td>IP65</td></tr> <tr> <td>Dimmable</td><td>On Request</td></tr> <tr> <td>Emergency</td><td>On Request</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> </table>	Input Voltage	220-240 V AC	Frequency	50/60Hz	Power Factor	>98%	CCT	3000K, 4000K, 5000K, 6000K	CRI	>80%	LED Efficiency	120-130Lm/W	Power Supply	Tridonic / Nassli	LED Type	Osram / Cree	Materials	Aluminum, PC, & Friendly material	Color Frame	Silver	Beam Angle	10°, 35°, 120°	Life Time	>50,000 Hour	Operating Temp	-20°C to +55°C	Storage Temp	-40°C to +85°C	Certifications	CE	Mounting	Wall Mounted/Surface Mounted	IP Rating	IP65	Dimmable	On Request	Emergency	On Request	Warranty	5 Years
Input Voltage	220-240 V AC																																									
Frequency	50/60Hz																																									
Power Factor	>98%																																									
CCT	3000K, 4000K, 5000K, 6000K																																									
CRI	>80%																																									
LED Efficiency	120-130Lm/W																																									
Power Supply	Tridonic / Nassli																																									
LED Type	Osram / Cree																																									
Materials	Aluminum, PC, & Friendly material																																									
Color Frame	Silver																																									
Beam Angle	10°, 35°, 120°																																									
Life Time	>50,000 Hour																																									
Operating Temp	-20°C to +55°C																																									
Storage Temp	-40°C to +85°C																																									
Certifications	CE																																									
Mounting	Wall Mounted/Surface Mounted																																									
IP Rating	IP65																																									
Dimmable	On Request																																									
Emergency	On Request																																									
Warranty	5 Years																																									
06	APPLICATIONS	<p>It can be widely used for shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...</p> <div style="display: flex; justify-content: space-around; align-items: flex-end;"> <div style="text-align: center;">   General Lighting         </div> <div style="text-align: center;">   Football Field         </div> <div style="text-align: center;">   Street Lamp         </div> <div style="text-align: center;">   Factory Lighting         </div> <div style="text-align: center;">   Green House         </div> <div style="text-align: center;">   Industrial Area         </div> <div style="text-align: center;">   Car Park         </div> <div style="text-align: center;">   Ware house         </div> </div>																																								
07	PHOTOMETRIC DATA	