LINEAR UP LIGHT

Data Sheet Documents

IP
67

5Y
WAR


CRI
80% - 90%

50.000
HOURS





01	ORDER CODE	• NSL-UPL-1000-120D-20W-XXK-SMD-NS-IP67
02	DIMENSIONS(MM)	• W65 H60 D85 L1000
01	ORDER CODE	• NSL-UPL-1000-120D-20W-XXK-SMD-NS-IP67
02	DIMENSIONS(MM)	• W160, H110, Ø145
01	ORDER CODE	• NSL-UPL-1000-120D-30W-XXK-SMD-NS-IP67
02	DIMENSIONS(MM)	• W210, H122, Ø196
01	ORDER CODE	• NSL-UPL-1000-120D-30W-XXK-SMD-NS-IP67
02	DIMENSIONS(MM)	• W232, H140, Ø222

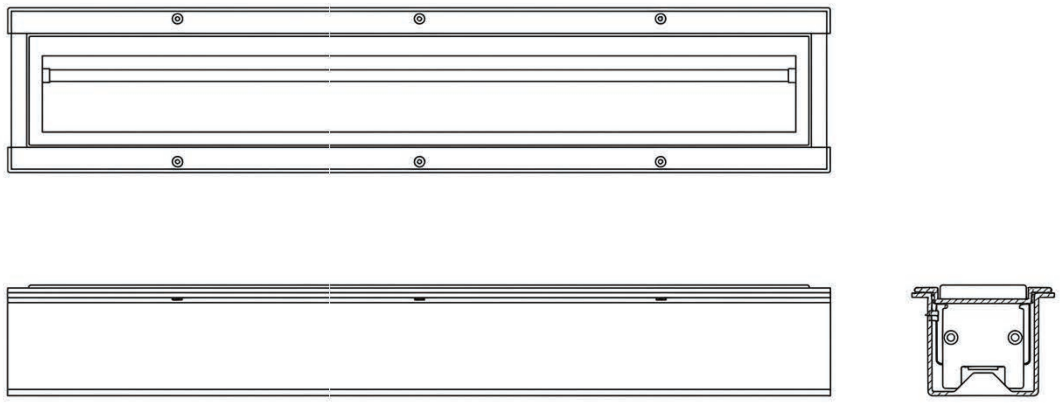

03 GENERAL PRODUCT DESCRIPTION

Powerful 20W/30W LED linear in-ground uplight with a sleek recessed tempered glass face that delivers a seamless, continuous ribbon of upward illumination The heavy-duty fully sealed IP67-rated aluminum housing is engineered for complete submersion resistance, making it equally suitable for wet zones, pool surrounds, and water features as well as standard ground installations, while the robust bolted frame withstands constant foot traffic and harsh outdoor conditions. CRI 80-90% for outstanding color accuracy, rated for 50,000 hours, and backed by a 5-year warranty.

04 FEATURES

A perfectly uniform, glare-free linear beam of light creates a breathtaking sense of depth and drama.

05 TECHNICAL DATA

Input Voltage	220-240 V A C
Frequency	50 / 60 H z
Power factor	>90%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80%-90%
LED Efficiency	110Lm/W
Wattage	20-30 W
Lumen	2200/3300Lm
Power supply	Nassli
LED Type	Cree
Materials	dicast aluminuim housing/Glass diffuser
Beam Angle	10˚ - 30˚
Life Time	>50,000 Hour
Operating Temp	˚20-C to ˚55+C
Storage Temp	˚40-C to ˚85+C
Certifications	CE, SELV and ISO
Mounting	Ground Recessed
IP Rating	IP67
Dimmable	On&Of / Phase cut / 0-10V / Dali
Emergency	N/A
Warranty	5 Years

06 APPLICATIONS

building facade grazing, colonnade lighting, landscape wall washing, pool perimeters, plaza installations, and any premium outdoor space.

