

# **NASSLI LED CUSTOMISE LINEAR LIGHT**

Data Sheet Document.

---



IP  
20-40

5Y  
WAR

10-60 W



CRI  
>80

50.000  
HOURS



01 ORDER CODE .....

02 DIMENSIONS (MM) .....

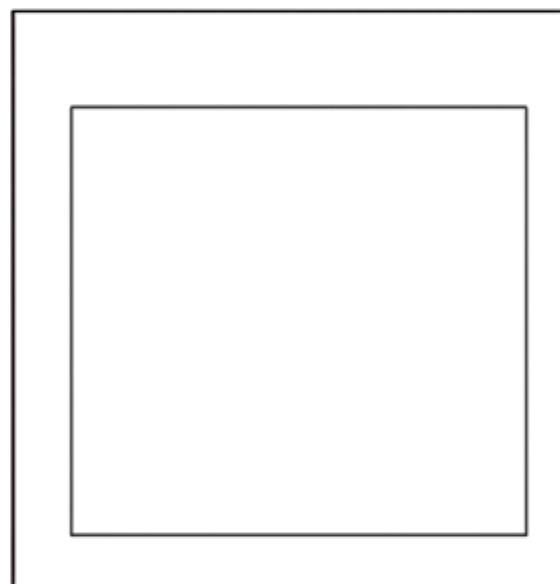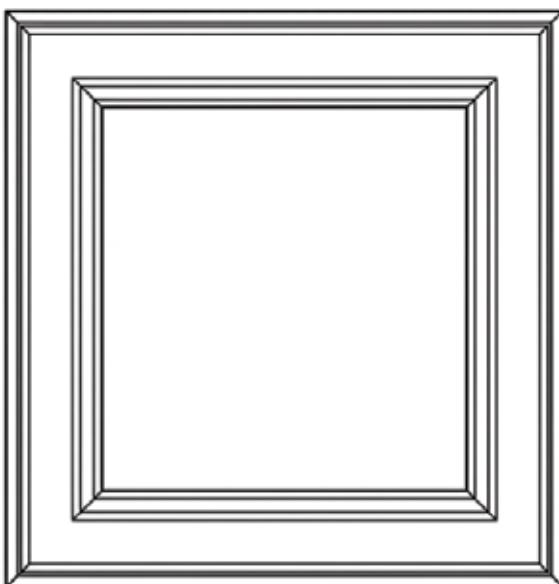

03	GENERAL PRODUCT DISCRIPTION	Wall-mounted LED luminaire engineered for both architectural and functional applications. Designed for surface or wall installation, this fixture delivers a high luminous efficacy of up to 130 lm/W with a uniform 115° beam angle. Its IP65-rated construction ensures durability in outdoor and humid environments, while the minimalist black housing blends seamlessly into modern architectural spaces.																																								
04	FEATURES	<ul style="list-style-type: none"> <li>This wall mirror brightens and adds depth to any bathroom, powder room, or bedroom.</li> <li>High cooling aluminum, makes it good even for hot areas.</li> <li>High lumen output.</li> <li>Power saving: as it replaces halogen, CFL, metal halide, so it saves between 50% to 90% of the consumed power.</li> <li>Have different options (diffuser, lens, narrow lens).</li> </ul>																																								
05	TECHNICAL DATA	<table> <tr> <td>Input Voltage</td><td>220 - 240 V AC</td></tr> <tr> <td>Frequency</td><td>50 / 60Hz</td></tr> <tr> <td>LED Type</td><td>Osram / Bridgelux</td></tr> <tr> <td>Power Supply</td><td>Tridonic / Nassli</td></tr> <tr> <td>LED Efficiency</td><td>120-130Lm/W</td></tr> <tr> <td>Materials</td><td>Aluminum, PC, &amp; Friendly material</td></tr> <tr> <td>Life Time</td><td>50,000 Hour</td></tr> <tr> <td>Operating Temperature</td><td>-20°C to +55°C</td></tr> <tr> <td>Storage Temperature</td><td>-40°C to +65°C</td></tr> <tr> <td>Certifications</td><td>CE, SELV, ISO and ROHS</td></tr> <tr> <td>IP Rating</td><td>IP20 / 40</td></tr> <tr> <td>Mounting</td><td>Recessed / Suspended</td></tr> <tr> <td>Watt/M</td><td>10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60</td></tr> <tr> <td>CCT (K)</td><td>3000K / 4000K / 5000K / 6000K / 6500K / RGB / RGBW</td></tr> <tr> <td>Emergency</td><td>As Per Request</td></tr> <tr> <td>Size</td><td>As Per Request</td></tr> <tr> <td>Dimensions</td><td>As Per Request</td></tr> <tr> <td>Color of Body</td><td>Black / White / As Per Request</td></tr> <tr> <td>Warranty</td><td>5 Years</td></tr> <tr> <td>CRI</td><td>70 / &gt;80 / &gt;90</td></tr> </table>	Input Voltage	220 - 240 V AC	Frequency	50 / 60Hz	LED Type	Osram / Bridgelux	Power Supply	Tridonic / Nassli	LED Efficiency	120-130Lm/W	Materials	Aluminum, PC, & Friendly material	Life Time	50,000 Hour	Operating Temperature	-20°C to +55°C	Storage Temperature	-40°C to +65°C	Certifications	CE, SELV, ISO and ROHS	IP Rating	IP20 / 40	Mounting	Recessed / Suspended	Watt/M	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60	CCT (K)	3000K / 4000K / 5000K / 6000K / 6500K / RGB / RGBW	Emergency	As Per Request	Size	As Per Request	Dimensions	As Per Request	Color of Body	Black / White / As Per Request	Warranty	5 Years	CRI	70 / >80 / >90
Input Voltage	220 - 240 V AC																																									
Frequency	50 / 60Hz																																									
LED Type	Osram / Bridgelux																																									
Power Supply	Tridonic / Nassli																																									
LED Efficiency	120-130Lm/W																																									
Materials	Aluminum, PC, & Friendly material																																									
Life Time	50,000 Hour																																									
Operating Temperature	-20°C to +55°C																																									
Storage Temperature	-40°C to +65°C																																									
Certifications	CE, SELV, ISO and ROHS																																									
IP Rating	IP20 / 40																																									
Mounting	Recessed / Suspended																																									
Watt/M	10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60																																									
CCT (K)	3000K / 4000K / 5000K / 6000K / 6500K / RGB / RGBW																																									
Emergency	As Per Request																																									
Size	As Per Request																																									
Dimensions	As Per Request																																									
Color of Body	Black / White / As Per Request																																									
Warranty	5 Years																																									
CRI	70 / >80 / >90																																									
06	APPLICATIONS	It can be widely used for decoration in shopping malls, palaces, trade shows, supermarkets, conference halls, hotels, schools, hospitals, meeting rooms, factories, theaters, cinemas, kitchens, and corridors, etc.																																								
07	PHOTOMETRIC DATA	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">   General Lighting         </div> <div style="text-align: center;">   Football Field         </div> <div style="text-align: center;">   Street Lamp         </div> <div style="text-align: center;">   Factory Lighting         </div> <div style="text-align: center;">   Green House         </div> <div style="text-align: center;">   Industrial Area         </div> <div style="text-align: center;">   Car Park         </div> <div style="text-align: center;">   Ware house         </div> </div>																																								