

LED CYLINDER LIGHT V2

Data Sheet Documents

IP
20/40

5Y
WAR

CRI
80%-90%

50.000
HOURS






01 | ORDER CODE
02 | DIMENSIONS (MM)

- NSL-CY-20W-XX-COB-TD-XX-IP20
- D130 H152


01 | ORDER CODE
02 | DIMENSIONS (MM)

- NSL-CY-20W-XX-COB-NS-XX-IP20
- D130 H152


FRONT VIEW

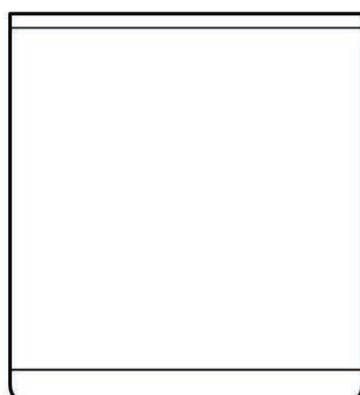

TOP VIEW

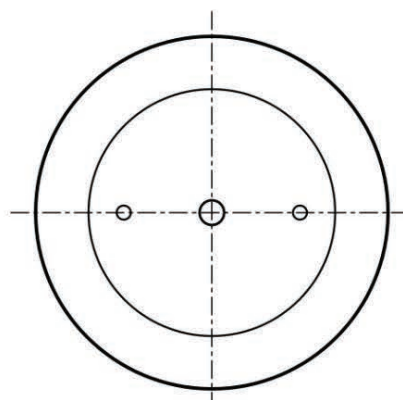

BOTTOM VIEW

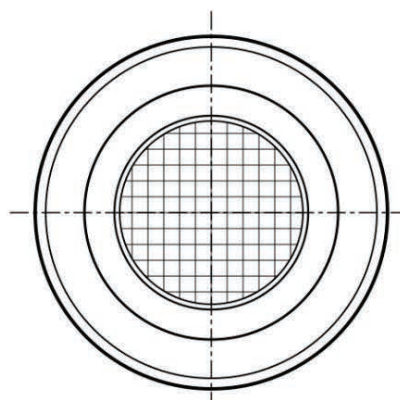

03 GENERAL PRODUCT DESCRIPTION Sleek 20W surface-mounted LED cylinder light and precision faceted COB reflector that delivers a focused, crisp downward beam with outstanding glare control. IP 20/40 rated, CRI 80 50,000 hour lifespan, and backed by a 5 year warranty.

04 FEATURES Adding a refined architectural touch that complements both minimalist and contemporary interior styles The precision-engineered faceted COB reflector produces a crisp, tightly controlled downward beam with outstanding anti-glare performance — delivering intense, focused illumination that highlights surfaces, products, and spaces with stunning clarity while keeping visual discomfort to an absolute minimum.

05	TECHNICAL DATA	Input Voltage	220-240VAC
		Frequency	50/60 Hz
		Power factor	90%
		CCT	2700K , 3000K , 3500K , 4000K, 5000K , 6000K
		CRI	80%-90%
		Wattage	20W
		Led Efficiency	80-100Lm/w
		Lumen	1800Lm
		Power supply	Tridonic / Nassli
		LED Type	Citizen
		Materials	Di Cast , ALUMINIUM Housing, Glass Diffusser
		Beam Angle	60°
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +65°C
		Certifications	CE, SELV and ISO
		Mounting	Surface Mounted
		IP Rating	IP20/40
		Dimmable	On&Of / Phase cut / 0-10V / Dali
		Emergency	On Request
		Warranty	5 Years

06 APPLICATIONS Perfect for retail displays, hospitality spaces, corridors, and modern interiors .



07 PHOTOMETRIC DATA

