nassli
LED LIGHTS

LED CYLINDER LIGHT V2

Data Sheet Documents

IP
65

5Y
WAR

CRI
80%-90%

50.000
HOURS





01	ORDER CODE	• NSL-CY-10W-XX-COB-TD-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-10W-XX-COB-NS-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-15W-XX-COB-TD-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-15W-XX-COB-NS-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-20W-XX-COB-TD-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-20W-XX-COB-NS-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-25W-XX-COB-TD-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-25W-XX-COB-NS-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-30W-XX-COB-TD-XX-IP65
02	DIMENSIONS (MM)	• W160 L250
01	ORDER CODE	• NSL-CY-40W-XX-COB-NS-XX-IP65
02	DIMENSIONS (MM)	• W160 L250

03 GENERAL PRODUCT DESCRIPTION

Sleek 10/15/20/25/30/40 W surface-mounted LED cylinder light and precision faceted COB reflector that delivers a focused, crisp downward beam with outstanding glare control. IP 65 rated, CRI 80-90,50000hour life span, and backed by a 5 years warranty.

04 FEATURES


Adding a refined architectural touch that complements both minimalist and contemporary interior styles The precision-engineered faceted COB reflector produces a crisp, tightly controlled downward beam with outstanding anti-glare performance — delivering intense, focused illumination that highlights surfaces, products, and spaces with stunning clarity while keeping visual discomfort to an absolute minimum.

05 TECHNICAL DATA


Input Voltage	220-240VAC
Frequency	50/60 Hz
Power factor	90%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80%-90%
Wattage	10/15/20/25/30/40W
Led Efficiency	90-110Lm/w
Lumen	1100-1650-2200-2750-3300-4400
Power supply	Tridonic / Nassli
LED Type	Citizen
Materials	Di Cast , ALUMINUIM Housing, Glass Diffusser
Beam Angle	24˚/ 30˚ / 60˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV and ISO
Mounting	Surface Mounted
IP Rating	IP65
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS


perfect for retail displays, hospitality spaces, corridors, and modern interiors and exteriors.

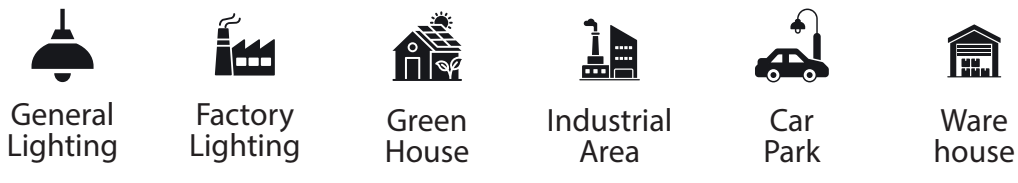

07 PHOTOMETRIC DATA

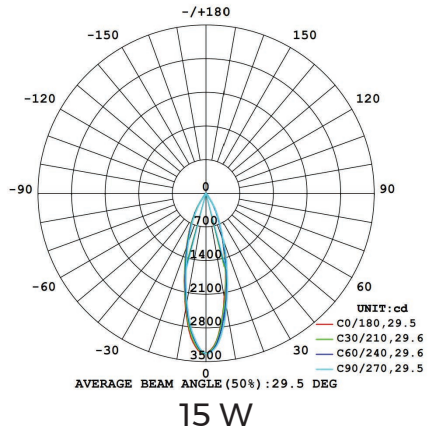

15 W

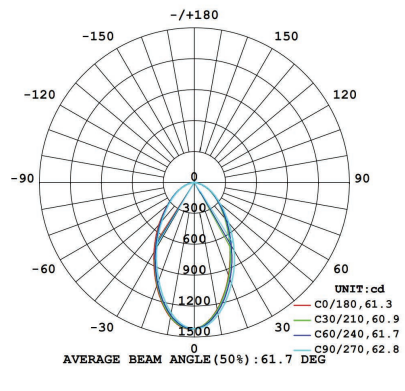

20 W