NASSLI
LED LIGHTS

DECORATIVE PENDANT HEX

Data Sheet Documents

IP
20

5Y
WAR

CRI
80%-90%

50.000
HOURS

01 | ORDER CODE

- NSL-DECORATIVE-PENDANT LIGHT-HEX

02 | DIMENSIONS (MM)

- D816 (HEXAGON)

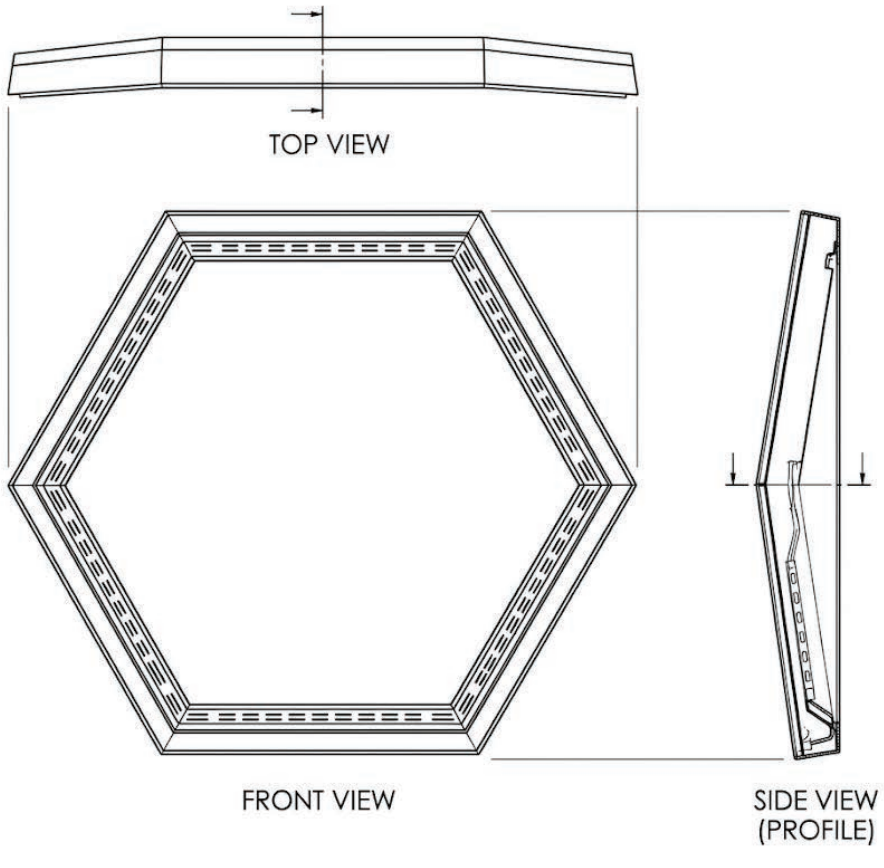

03 GENERAL PRODUCT DESCRIPTION

Eye-catching hexagonal LED pendant, 816 mm across, that can be grouped into honeycomb patterns for a bold, modern ceiling. The PC diffuser gives smooth, continuous and glare-free light, and high-efficacy Bridgelux / Osram SMD LEDs reach 100 Lm/W at 50 W for 5,000 lm with CRI of 80 or 90. Rated for 50,000 hours of dependable performance. Backed by a 5-year warranty.

04 FEATURES

High-efficacy Bridgelux / Osram SMD LEDs, 100 Lm/W.
Hexagonal D816 mm frame, can be combined into honeycomb layouts.
Human and environment friendly, no PB, Hg nor UV, flicker free.
High power saving, no decay and color temperature shift.
Dimmable: On&Off / 10-0V / Dali.

05 TECHNICAL DATA

Input Voltage	220-240VAC
Frequency	50 / 60 Hz
Power factor	90%
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6000K
CRI	80, 90%
LED Efficiency	100Lm/W
Wattage	50W
Lumen	5000Lm
Power supply	NASSLI
LED Type	Bridgelux / Osram
Materials	Aluminum, PC, & Friendly material
Frame Color	On Request
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV and ISO
Mounting	Suspended
IP Rating	IP20
Size	D816 mm hexagon
Dimmable	On&Off / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

Ideal for decoration, shopping malls, trade shows, supermarkets, hotels, schools, hospitals, factories, conference halls, palaces, meeting rooms, theaters, cinemas, kitchens and corridors.