LED MIRROR LIGHT

Data Sheet Document

-



IP
54


5Y
WAR

CRI
>80,90

50.000
HOURS



01	ORDER CODE	• NSL-MROR-600-11W-XXK-SMD-ZY-IP54
02	DIMENSIONS (MM)	• W42 H35 L600
01	ORDER CODE	• NSL-MROR-600-22W-XXK-SMD-ZY-IP54
02	DIMENSIONS (MM)	• W42 H35 L600

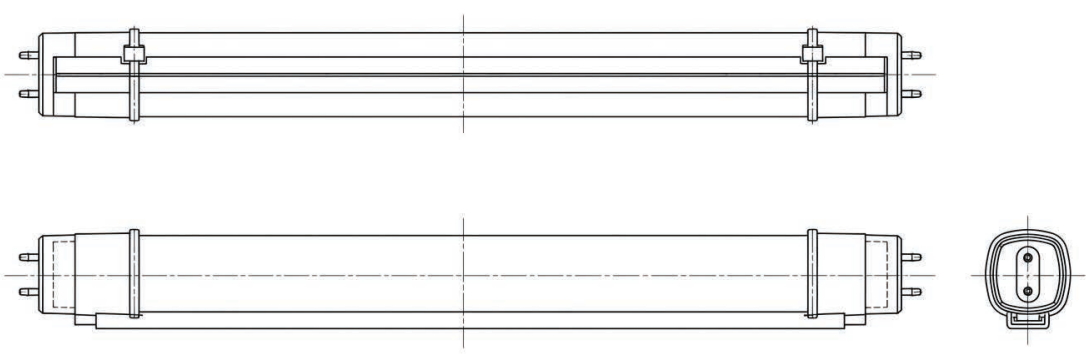

03 GENERAL PRODUCT DESCRIPTION

LED mirror light, wall mounted above or beside bathroom and vanity mirrors to give even, shadow-free light on the face for grooming, make-up and daily use. A high-efficiency Osram LED source behind a PC diffuser delivers 880 lm (11W) or 1760 lm (22W) with a wide 110° beam, CRI 80-90 for natural skin tones and a lifetime of up to 50,000 hours. IP54 protection against splashing water and humidity makes it suitable for bathrooms and wet zones, with reliable and energy-efficient performance.

04 FEATURES

- Even, glare-free light across the mirror for a clear, shadow-free reflection.
- CRI 80-90 renders skin tones and colours naturally.
- IP54 protected against water splashes and bathroom humidity.
- Wide CCT choice, from warm 2700K to cool 6000K.
- Slim aluminium profile, wall mounted above or beside the mirror.
- Dimmable through On&Off, phase cut, 0-10V or DALI control.

05 TECHNICAL DATA

Input Voltage	220 - 240 VAC
Frequency	50 / 60Hz
Power factor	>95%
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6000K
CRI	80 - 90
LED Efficiency	80 - 100 Lm/W
Wattage	11W / 22W
Lumen	880 Lm / 1760 Lm
Power supply	Nassli
LED Type	Osram
Materials	Aluminum, PC
Beam Angle	110°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall mounted
IP Rating	IP54
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

Suitable for residential bathrooms, hotel rooms and suites, public washrooms, dressing and changing rooms, hair and beauty salons, spas and gyms, and any vanity or mirror area that needs clear, flattering light.

