

LED MIRROR LIGHT

Data Sheet Documents

IP
20/54

5Y
WAR

CRI
>80

50.000
HOURS





01 | ORDER CODE

• NSL-MROR-600-11W-XXK-SMD-ZY-IP54

02 | DIMENSIONS (MM)


• W42 H35 L600

01 | ORDER CODE

• NSL-MROR-600-22W-XXK-SMD-ZY-IP54

02 | DIMENSIONS (MM)

• W42 H35 L600

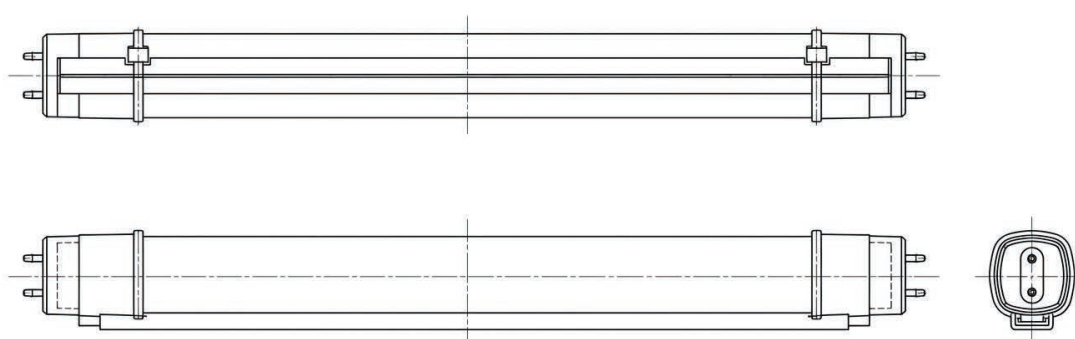

03 **GENERAL PROUDUCT DISCRIPTION**

Adjustable LED downlight designed to deliver focused and directional illumination for modern interior spaces, retail environments, and architectural lighting applications. Featuring a high-performance LED source with precision optical reflector, it provides accurate light control, high color rendering (CRI >80), and an operational lifetime of up to 50,000 hours. With an IP20 protection rating and a recessed adjustable design, it integrates seamlessly into ceilings while ensuring reliable and energy-efficient lighting performance.

- 04** **FEATURES**
- The prouduct used as pure light source , using LED technology
 - human and environment friendly,no PB, Hg nor UV.
 - High power saving fixture, no decay and color temperature shift.
 - Can be dimmable (through direct control or via network).

05	TECHNICAL DATA	Input Voltage	220 - 240 VAC
		Frequency	50 / 60Hz
		Power factor	>95%
		CCT	3000K, 4000K, 5000K, 6000K
		CRI	>80%, >90%
		LED Efficiency	110-120Lm/W
		Wattage	11W/22W
		Power supply	Nassli
		LED Type	Osram
		Materials	Aluminum, PC
		Beam Angle	110°
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +85°C
		Certifications	CE, SELV and ISO
		Mounting	Wall mounted
		IP Rating	IP20 / IP54
		Dimmable	On Request
		Emergency	On Request
		Warranty	5 Years

06 **APPLICATIONS**

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...

