# LED SLIM WALL WASHER SPI RGBW

Data Sheet Documents

IP
67

5Y
WAR

CRI
>80


50.000
HOURS







| | | |
|---|---|---|
| 01 | ORDER CODE | • NSL-WW-SLIM-SPI-23W/M-RGBW-IP65 |
| 02 | DIMENSIONS(MM) | • W28 H30 L850 MM |

FRONT VIEW

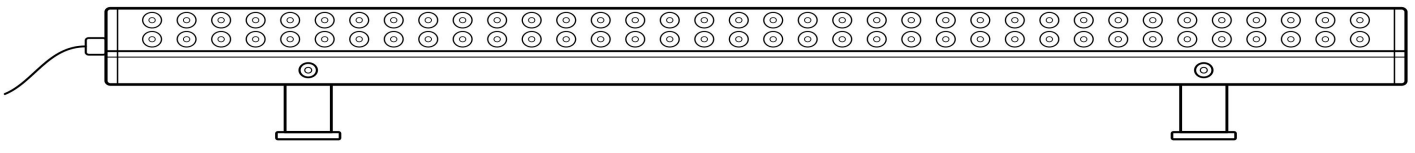

SIDE VIEW





TOP VIEW

## 03 GENERAL PRODUCT DESCRIPTION

Dynamic 23W RGBW SPI LED wall washer delivering an extraordinary spectrum of vivid, programmable color effects combined with pure, crisp white illumination — transforming any facade, wall, or architectural surface into a breathtaking canvas of living light. The robust IP65-rated aluminum housing with precision individual lens optics ensures a perfectly controlled, uniform wide-angle wash beam from end to end, with CRI >80 for rich, accurate color rendering. Rated for 50,000 hours and backed by a 5-year warranty.

## 04 FEATURES

The SPI (Serial Peripheral Interface) pixel control technology enables stunning chase effects, color transitions, and dynamic lighting sequences that can be independently programmed pixel by pixel for maximum creative impact and visual drama.

## 05 TECHNICAL DATA

| | |
|---|---|
| **Input Voltage** | 24VDC |
| **CCT** | RGBW |
| **CRI** | >80% |
| **Wattage** | 23W/M |
| **Lumen** | 900Lm/W |
| **Power supply** | NASSLI/TRIDONIC/INVENTRONICS |
| **Power Factor** | 90% |
| **LED Type** | Osram / bridgelux/Cree |
| **Beam Angle** | 120˚ |
| **Life Time** | >50,000 Hour |
| **Operating Temp** | -20˚C to +55˚C |
| **Storage Temp** | -40˚C to +65˚C |
| **Certifications** | CE, SELV and ISO |
| **Mounting** | IN PROFILE |
| **IP Rating** | IP65 |
| **Dimmable** | On&Off / Phase cut / 0-10V / Dali |
| **Emergency** | N/A |
| **Warranty** | 5 Years |

## 06 APPLICATIONS

The ultimate dynamic architectural lighting tool for building facades, hotels, entertainment venues, bridges, cultural landmarks, and any premium outdoor surface.




## 07 PHOTOMETRIC DATA