PANEL LIGHT
30*120

Data Sheet Documents


-

IP
20-40

5Y
WAR

CRI
>80

50.000
HOURS

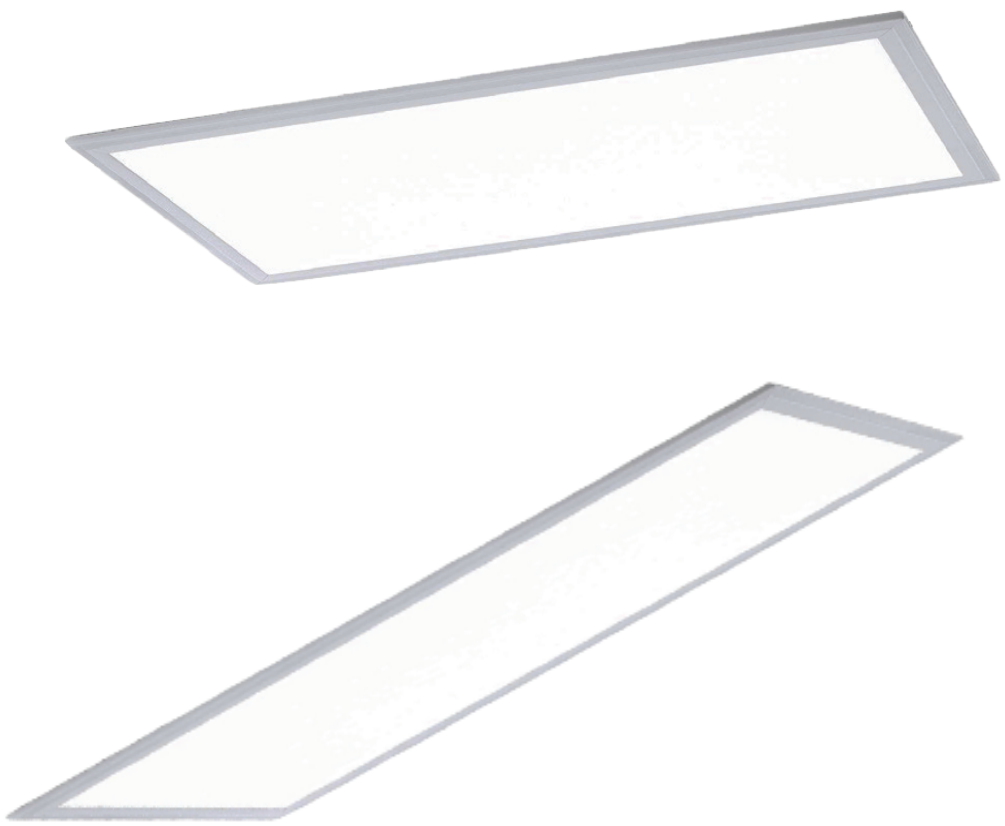



01	ORDER CODE	• NSL-PL-30120-40W-XXK-SMD-NS-IP20
02	DIMENSIONS(MM)	• 119X29.5X9
01	ORDER CODE	• NSL-PL-30120-40W-XXK-SMD-NS-IP40
02	DIMENSIONS(MM)	• 119X29.5X9
01	ORDER CODE	• NSL-PL-30120-40W-XXK-SMD-TD-XX-IP20
02	DIMENSIONS(MM)	• 119X29.5X9
01	ORDER CODE	• NSL-PL-30120-40W-XXK-SMD-TD-XX-IP40
02	DIMENSIONS(MM)	• 119X29.5X9

03 GENERAL PRODUCT DESCRIPTION

Elegant 40W LED panel in a slim 30×120cm format with CRI >80 for accurate, true-to-life color rendering, IP20/40-rated for standard and splash-proof environments, rated for 50,000 hours and backed by a 5-year warranty.

04 FEATURES


delivering a seamless continuous ribbon of perfectly uniform, glare-free illumination that adds a clean, contemporary linear aesthetic to any ceiling. The ultra-slim narrow profile integrates effortlessly into suspended ceiling grids or surface mounts, producing a smooth, wide-angle light distribution.

05 TECHNICAL DATA

Input Voltage	220-240VAC/50-60Hz
Power factor	90%
CCT	3000K,4000K, 6000K
CRI	>80%
Wattage	40 W
LED Efficiency	80-100Lm/W
Power supply	NASSLI/TRIDONIC
LED Type	Osram / bridgelux
Materials	ALUMINUIM FRAME, PC DIFFUSER
Beam Angle	110˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV and ISO
Mounting	RECESSED
IP Rating	IP20-40
Dimmable	yes
Emergency	yes
Warranty	5 Years

06 APPLICATIONS

Offices, schools, hospitals, retail spaces, hotels, and any commercial interior.

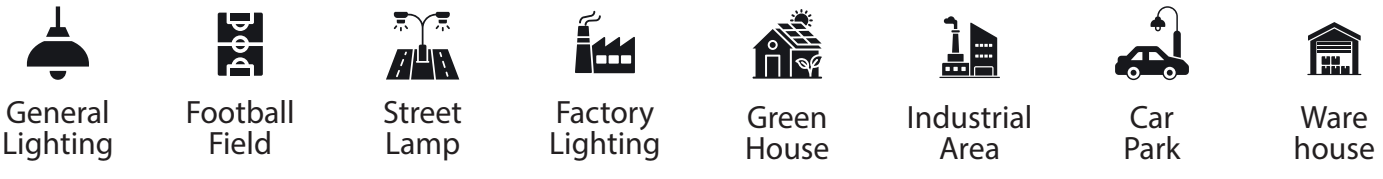

07 PHOTOMETRIC DATA

