NASSLI
LED LIGHTS

PANEL LIGHT
60*60

Data Sheet Documents


-


IP
20-40

5Y
WAR

CRI
>80/>90

50.000
HOURS

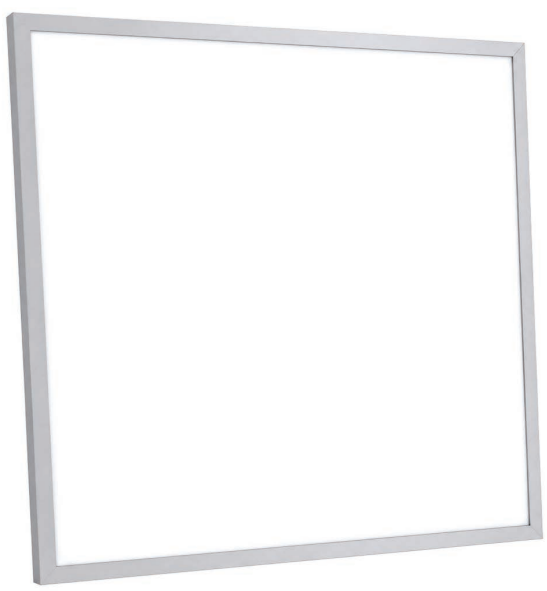

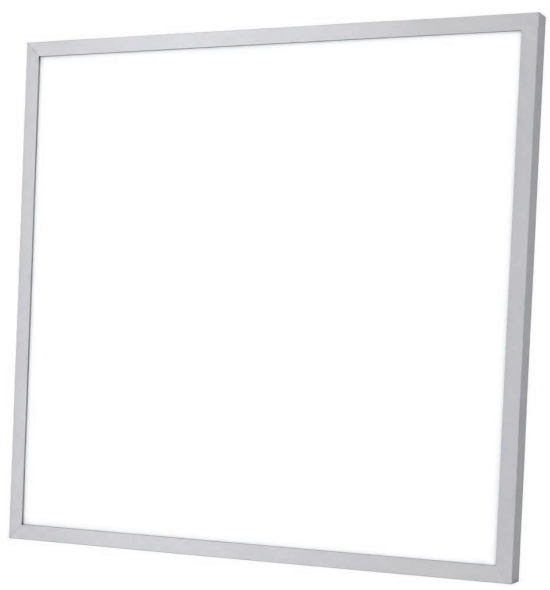



01	ORDER CODE	• NSL-PL-6060-40W-XXK-SMD-TD-XX-IP20
02	DIMENSIONS(MM)	• 590.5 X 590.5 X 70 MM
01	ORDER CODE	• NSL-PL-6060-40W-XXK-SMD-NS-XX-IP20
02	DIMENSIONS(MM)	• 590.5 X 590.5 X 70 MM
01	ORDER CODE	• NSL-PL-6060-40W-XXK-SMD-PH-XX-IP20
02	DIMENSIONS(MM)	• 590.5 X 590.5 X 70 MM
01	ORDER CODE	• NSL-PL-6060-40W-XXK-SMD-TD-XX-IP40
02	DIMENSIONS(MM)	• 590.5 X 590.5 X 70 MM
01	ORDER CODE	• NSL-PL-6060-40W-XXK-SMD-NS-XX-IP40
02	DIMENSIONS(MM)	• 590.5 X 590.5 X 70 MM
01	ORDER CODE	• NSL-PL-6060-40W-XXK-SMD-PH-XX-IP40
02	DIMENSIONS(MM)	• 590.5 X 590.5 X 70 MM

03 GENERAL PRODUCT DESCRIPTION

Premium 40W LED panel in a standard 60×60cm format with CRI 80/90 for accurate, true-to-life color rendering, IP20/40-rated for standard and splash-proof environments, rated for 50,000 hours and backed by a 5-year warranty.

04 FEATURES


Delivering perfectly uniform, shadow-free, glare-free illumination across the entire surface with exceptional brightness consistency that transforms any ceiling grid into a seamless plane of pure, comfortable light. The ultra-slim aluminum frame and high-efficiency light guide plate produce a smooth, wide-angle light distribution.

05 TECHNICAL DATA

Input Voltage	220 - 240 VAC / 50 - 60 Hz
Power factor	90%
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6000K
CRI	80% / 90%
Wattage	40W
LED Efficiency	110 - 130 Lm/W
Lumen	4800 Lm
Power supply	Nassli / Tridonic / Philips
LED Type	Osram / Bridgelux
Materials	Aluminium frame, PC diffuser
Beam Angle	110°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +65°C
Certifications	CE, SELV and ISO
Mounting	Recessed / Surface
IP Rating	IP20 / IP40
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

Offices, schools, hospitals, retail spaces, hotels, and any commercial interior.

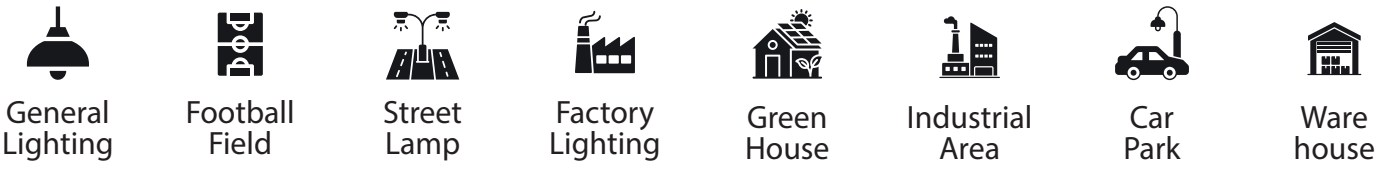

07 PHOTOMETRIC DATA

