NASSLI
LED LIGHTS

LED SPIKE LIGHT

Data Sheet Documents

IP
65

5Y
WAR

CRI
>80 / >90

50.000
HOURS






01 | ORDER CODE

- NSL-SPK-XGN-3W-XXK-SMD-XD-NS-IP65

02 | DIMENSIONS (MM)

- D60 H295

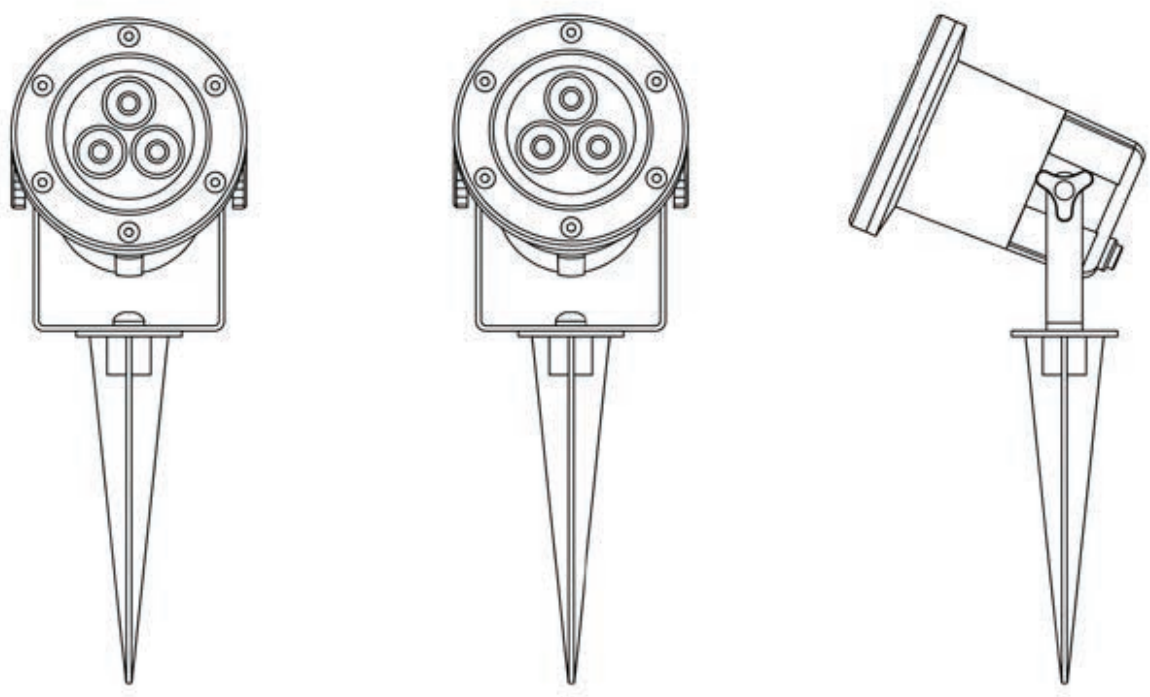

03 GENERAL PRODUCT DESCRIPTION

Compact 3W LED spike light with a fully adjustable head and sturdy ground spike for precise, flexible accent lighting in any outdoor setting. IP-65rated, weatherproof, and built with a robust die-cast aluminum body; CRI >80, rated for 50,000 hours, and backed by a -5year warranty

04 FEATURES

Focused anti-glare beam for dramatic accent effects, fully adjustable tilt for precise light direction, and a sleek, compact design that stays discreet while delivering a powerful visual impact on any landscape feature.

05 TECHNICAL DATA

Input Voltage	220-240 VAC
Frequency	50/60 Hz
Power factor	90%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	90%
LED Efficiency	70Lm/W
Lumen	210 Lm
Wattage	3 w
Power supply	Tridonic / Nassli / GL/QP
LED Type	BRIDGELUX
Materials	DIE- CAST ALUMINUIM HOUSING
Beam Angle	24˚, 38˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +85˚C
Certifications	CE, SELV and ISO
Mounting	On Ground
IP Rating	IP65
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	N/A
Warranty	5 Years

06 APPLICATIONS

It can be widely used for decoration, shopping malls, Palaces, Trade shows, Supermarkets, Conference Halls, Hotels, Schools, Hospitals, Meeting room Factories, Theater, Cinemas, Kitchens and Corridor etc...



07 PHOTOMETRIC DATA

