PANEL LIGHT SRFV1

Data Sheet Documents

-

IP
20

5Y
WAR

CRI
>80 - >90

50.000
HOURS





01	ORDER CODE	• NSL-SRFV1-180-18W-XXK-SMD-NS-IP20
02	DIMENSIONS (MM)	• H55.5 D180.5 MM
01	ORDER CODE	• NSL-SRFV1-180-18W-XXK-SMD-DON-IP20
02	DIMENSIONS (MM)	• H55.5 D180.5 MM
01	ORDER CODE	• NSL-SRFV1-220-24W-XXK-SMD-NS-IP20
02	DIMENSIONS (MM)	• H55.5 D225 MM
01	ORDER CODE	• NSL-SRFV1-220-24W-XXK-SMD-DON-IP20
02	DIMENSIONS (MM)	• H55.5 D225 MM

03 GENERAL PRODUCT DESCRIPTION

Clean and contemporary 18W/24W round surface-mounted LED panel CRI >80/90 for accurate, true-to-life color rendering, IP20 rated, rated for 50,000 hours and backed by a 5 year warranty.

04 FEATURES

smooth domed opal diffuser that delivers soft, wide-angle, glare-free illumination for a comfortable and welcoming interior atmosphere.

05 TECHNICAL DATA


Input Voltage	220-240VAC
Frequency	50/60 Hz
Power factor	80%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80%-90%
Wattage	18/24 W
Led Efficiency	100Lm/W
Lumen	1800/2400 Lm
Power supply	Nassli,Lifud
LED Type	Osram/Bridgelux
Materials	Aluminum housing, PC diffuser
Beam Angle	120˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV and ISO
Mounting	Surface Mounted , Suspended
IP Rating	IP20
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

the perfect lighting solution for luxury bathrooms, hotel vanities, dressing rooms, beauty salons.



07 PHOTOMETRIC DATA

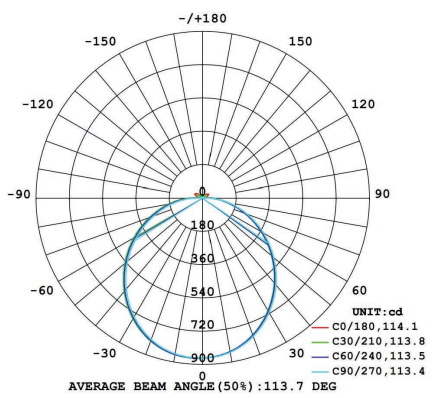

24 W