PANEL LIGHT SRFV2

Data Sheet Documents

-

IP
20

5Y
WAR

CRI
>80 - >90

50.000
HOURS






01 | ORDER CODE


- NSL-SRFV2-350-30W-XXK-SMD-LF-IP20

02 | DIMENSIONS (MM)


- ⌀ 350 MM



TOP VIEW

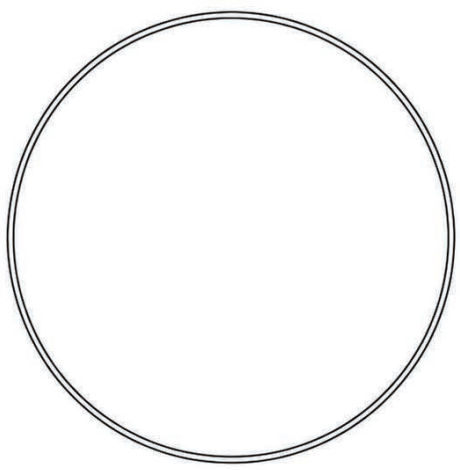

FRONT VIEW



SIDE VIEW

03 GENERAL PRODUCT DESCRIPTION

Sleek 30W round surface-mounted LED panel with a smooth, curved opal diffuser, CRI >80/90 for accurate, true-to-life color rendering, IP-20rated, rated for 50,000 hours, and backed by a 5year warranty.

04 FEATURES

soft, uniform, glare-free illumination across any interior space with effortless elegance.

05 TECHNICAL DATA

Input Voltage	220-240VAC
Frequency	50/60 Hz
Power factor	80%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80%-90%
Wattage	30 W
Led Efficiency	80-100Lm/W
Lumen	3000 Lm
Power supply	Nassli, Lifud
LED Type	Osram/BridgeLux
Materials	Aluminum housing, PC diffuser
Beam Angle	120˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +65˚C
Certifications	CE, SELV and ISO
Mounting	Surface Mounted
IP Rating	IP20
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

Perfect for bedrooms, living rooms, corridors, offices, and any modern interior.

