

PANEL LIGHT SRFV2

Data Sheet Documents

IP
20

5Y
WAR


CRI
>80 - >90

50.000
HOURS







01	ORDER CODE	• NSL-SRFV2-350-30W-XXK-SMD-LF-IP20
02	DIMENSIONS (MM)	• Ø 350 MM



TOP VIEW

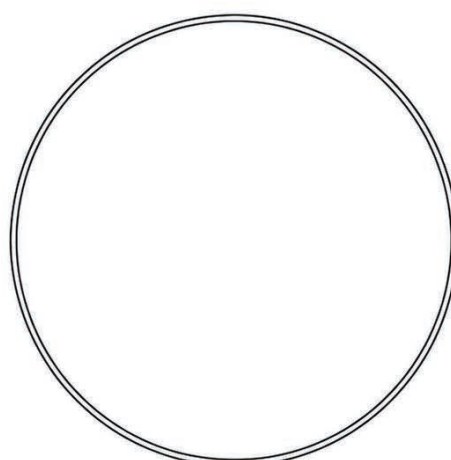

FRONT VIEW



SIDE VIEW

03 GENERAL PRODUCT DESCRIPTION Sleek 30W round surface-mounted LED panel with a smooth, curved opal diffuser, CRI >80/90 for accurate, true-to-life color rendering, IP-20 rated, rated for 50,000 hours, and backed by a 5 year warranty.

04 FEATURES soft, uniform, glare-free illumination across any interior space with effortless elegance.

05	TECHNICAL DATA	Input Voltage	220-240VAC
		Frequency	50/60 Hz
		Power factor	80%
		CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
		CRI	80%-90%
		Wattage	30 W
		Led Efficiency	80-100Lm/W
		Lumen	3000 Lm
		Power supply	Nassli, Lifud
		LED Type	Osram/BridgeLux
		Materials	Aluminum housing, PC diffuser
		Beam Angle	120°
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +65°C
		Certifications	CE, SELV and ISO
		Mounting	Surface Mounted
		IP Rating	IP20
		Dimmable	On&Of / Phase cut / 0-10V / Dali
		Emergency	On Request
		Warranty	5 Years

06 APPLICATIONS Perfect for bedrooms, living rooms, corridors, offices, and any modern interior.

