LED STAIR WAY LIGHT

Data Sheet Documents

-

IP
67

5Y
WAR

CRI
>80 / >90

50.000
HOURS







01	**ORDER CODE**	• NSL-STAIR-SQ-2W/MODULE-XXK-NS-IP67
02	**DIMENSIONS (MM)**	• W65 L27.5

01	**ORDER CODE**	• NSL-STAIR-SQ-2W/MODULE-XXK-TD-XX-IP67
02	**DIMENSIONS (MM)**	• W65 L27.5


01	**ORDER CODE**	• NSL-STAIR-SQ-2W/MODULE-XXK-PH-XX-IP67
02	**DIMENSIONS (MM)**	• W65 L27.5

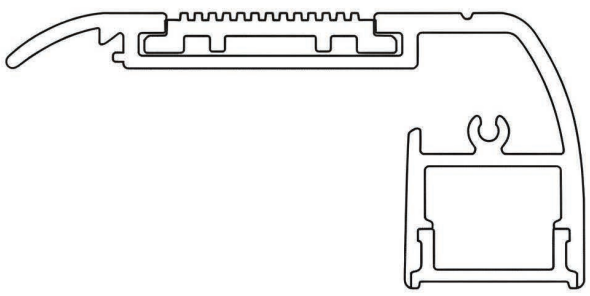


FRONT ELEVATION

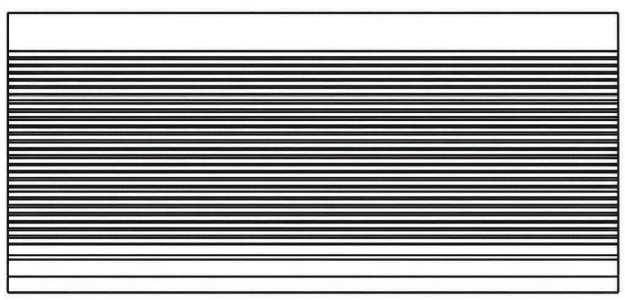

TOP VIEW

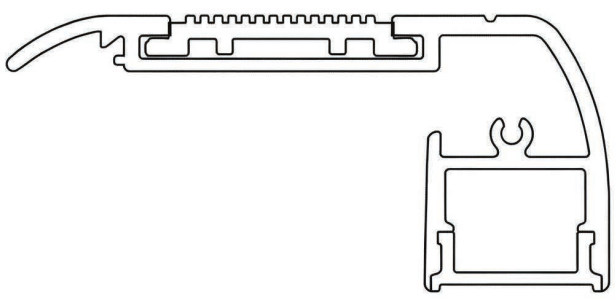

FRONT ELEVATION

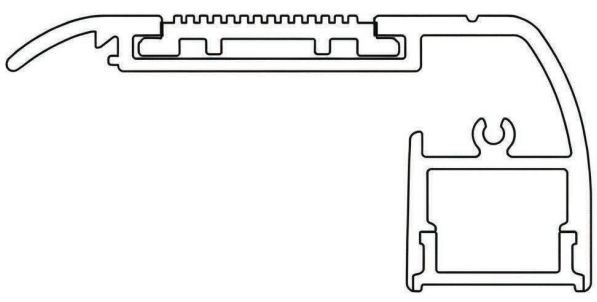

SIDE ELEVATION

03 GENERAL PRODUCT DESCRIPTION

Smart stairway lighting solution offering both safety and decorative effect. Compact design with 160° light distribution and surface-mounted installation.

04 FEATURES

In most cases, lighting on staircases isn't purely a decorative function it also serves a very real function in terms of safety. Glare should be avoided and maintained, whilst using interior lighting to enhance the form can add beauty and softness.

05 TECHNICAL DATA

Input Voltage	220 - 240 V A C
Frequency	50 / 60 H z
Power factor	90%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80% / 90%
LED Efficiency	85-120Lm/W
Wattage	2 W Module
Power supply	TTradonic / Nassli
LED Type	Osram
Materials	Aluminum
Beam Angle	160°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Recessed in Wall
IP Rating	IP67
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

Staircases, pathways, garden steps, and architectural wall accents.

