

SURFACE MOUNTED V2

Data Sheet Document.

IP
20

5Y
WAR

30 W

CRI
>80

50.000
HOURS







01 ORDER CODE

02 DIMENSIONS (MM)

• NSL-SRFV2-350-30W-XXK-SMD-LF-IP20

•

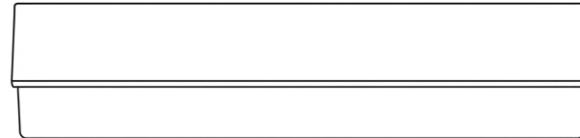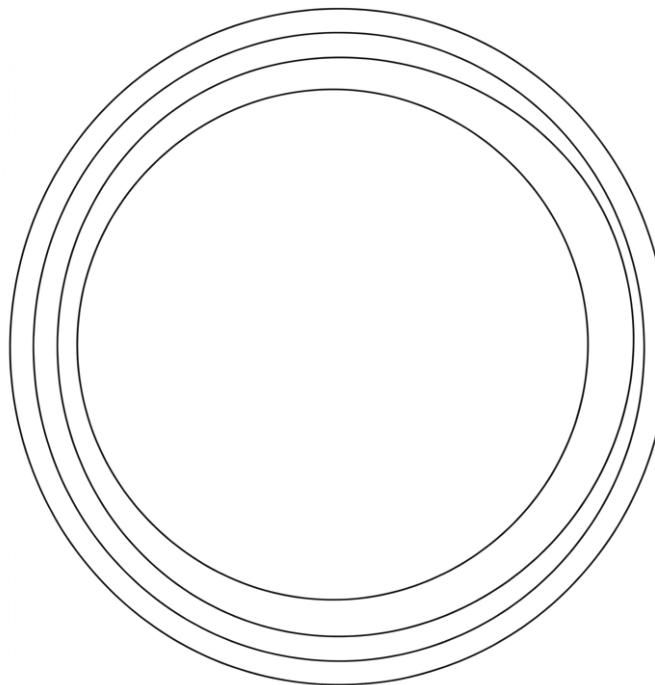

03 **GENERAL PRODUCT DESCRIPTION** Version of surface-mounted LED luminaires, the Surface Mounted V2 delivers uniform light distribution with a 120° beam angle. Designed with a sleek, modern aesthetic, it is compatible with motion sensors, making it ideal for open ceilings, luxurious lobbies, and elegant entryways.

04 **FEATURES**

- The product used as pure light source, using LED technology human and environment friendly, no PB, Hg nor UV.
- High power saving fixture, no decay and color temperature shift.
- Can be dimmable (through direct control or via network).
- A motion Sensor can be added.

05	TECHNICAL DATA	Input Voltage	220 - 240 V A C
		Frequency	50 / 60Hz
		Power Factor	>98%
		CCT	2700K, 3000K, 4000K, 6000K
		CRI	>80%
		LED Efficiency	120-130Lm/W
		Power Supply	Nassli
		LED Type	Osram / Bridgelux
		Materials	Aluminum, PC, & Friendly material
		Beam Angle	120°
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +65°C
		Certifications	CE, SELV and ISO
		Mounting	Surface Mounted
		IP Rating	IP20
		Dimmable	On Request
		Emergency	On Request
		Warranty	5 Years

06 **APPLICATIONS** It can used for Hotels, Government Building, offices, Meeting Room, Residential Building (villas, palaces, apartment), School collage and University, Hospitals Super Market.



General Lighting



Football Field



Street Lamp



Factory Lighting



Green House



Industrial Area



Car Park



Ware house

07 **PHOTOMETRIC DATA**

