NASSLI
LED LIGHTS

LED STRIP LIGHT BRT

Data Sheet Documents

IP
65

5Y
WAR


CRI
80% / 90%

50.000
HOURS





01	ORDER CODE	• NSL-STR-BRT-4.8W/M-XXK-SMD-IP65
02	DIMENSIONS (MM)	• XX*12*8 MM

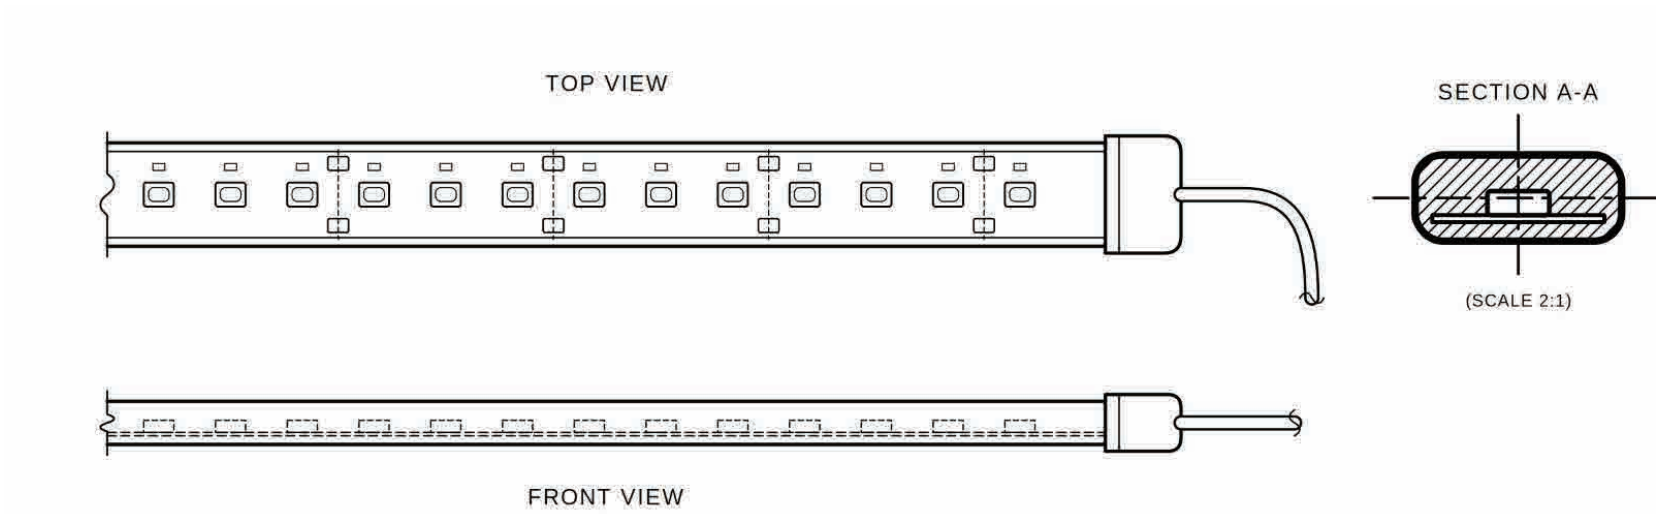

03 GENERAL PRODUCT DESCRIPTION

Versatile LED strip light delivering a seamless, continuous ribbon of warm, glare-free illumination at 4.8W per meter — with aluminum profile , fully cuttable and linkable to fit any length or layout with effortless precision.

04 FEATURES

delivering a refined and sophisticated linear light effect that elevates any interior or architectural detail it touches. Fully cuttable and linkable for complete design freedom.

05 TECHNICAL DATA

Input Voltage	24 VdC
Frequency	50/60 Hz
Power factor	90%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80% - 90%
LED Efficiency	100Lm/W
Lumen	≈ 900lm/m
Wattage	4.8W/M
Power supply	Tridonic / Nassli
LED Type	OSRAM/BRIDGELUX
Materials	aluminum ,PC
Beam Angle	120˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +85˚C
Certifications	CE, SELV and ISO
Mounting	in profile/hidden
IP Rating	IP65
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

cove lighting, cabinet underlighting, retail shelving, hospitality interiors, staircases, and any architectural accent application.

