NASSLI
LED LIGHTS

LED STRIP LIGHT

Data Sheet Documents

IP
54

5Y
WAR

CRI
80%-90%

50.000
HOURS






01 | ORDER CODE

- NSL-STR-GL11W/M-220V-XXK-SMD-IP54

02 | DIMENSIONS (MM)

- H8.5 W15

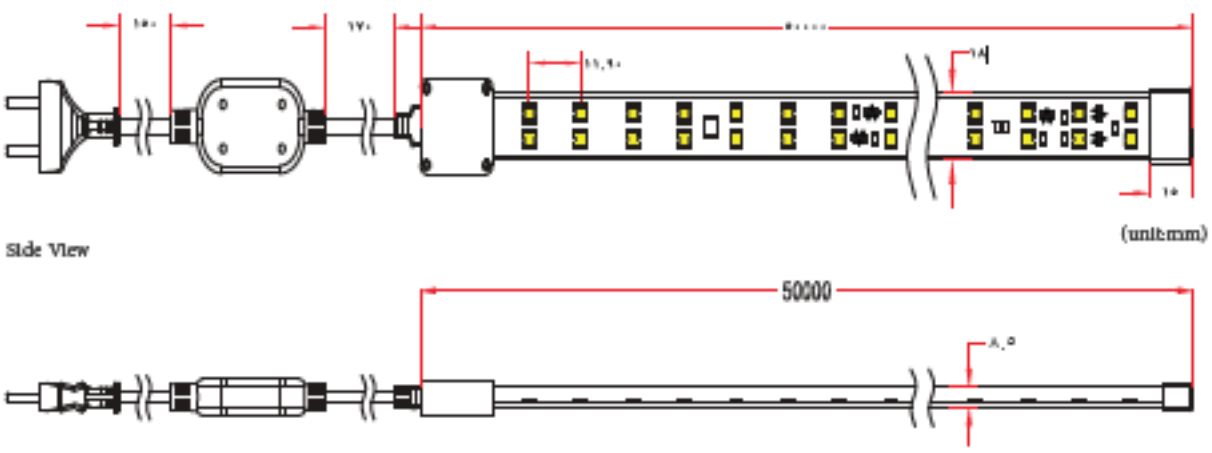

03 GENERAL PRODUCT DESCRIPTION

High-density double-row LED strip light delivering a powerful 11W per meter of bright The transparent silicone coating provides IP-54rated protection against dust and moisture splashes, making it equally at home in indoor and semi-outdoor applications with outstanding long-term durability. Fully cuttable and dimmable for complete design flexibility, CRI >80 for rich and accurate color rendering, rated for 50,000 hours and backed by a -5year warranty

04 FEATURES

uniform illumination with an ultra-high LED count that eliminates hotspots and ensures a smooth, seamless ribbon of consistent light across every centimeter.

05 TECHNICAL DATA

Input Voltage	24 VdC
Frequency	50/60 Hz
Power factor	90%
CCT	2700K, 3000K , 3500K , 4000K, 5000K , 6000K
CRI	80% -90%
Wattage	11W/M
LUMEN	≈900 Lm/M
Power supply	Tridonic / Nassli
LED Type	Epistar
Materials	PC, & Eco-Friendly material
Beam Angle	120˚
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +85˚C
Certifications	CE, SELV and ISO
Mounting	in profile/hidden
IP Rating	IP54
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	On Request
Warranty	5 Years

06 APPLICATIONS

cove lighting, cabinet underlighting, retail shelving, hospitality interiors, staircases, and any architectural accent application.

