

LED STRIP LIGHT

Data Sheet Documents

**IP
54**

**5Y
WAR**


**CRI
80%-90%**

**50.000
HOURS**





- | | | |
|----|-----------------|-------------------------------------|
| 01 | ORDER CODE | • NSL-STR-GL11W/M-220V-XXK-SMD-IP54 |
| 02 | DIMENSIONS (MM) | • H8.5 W15 |

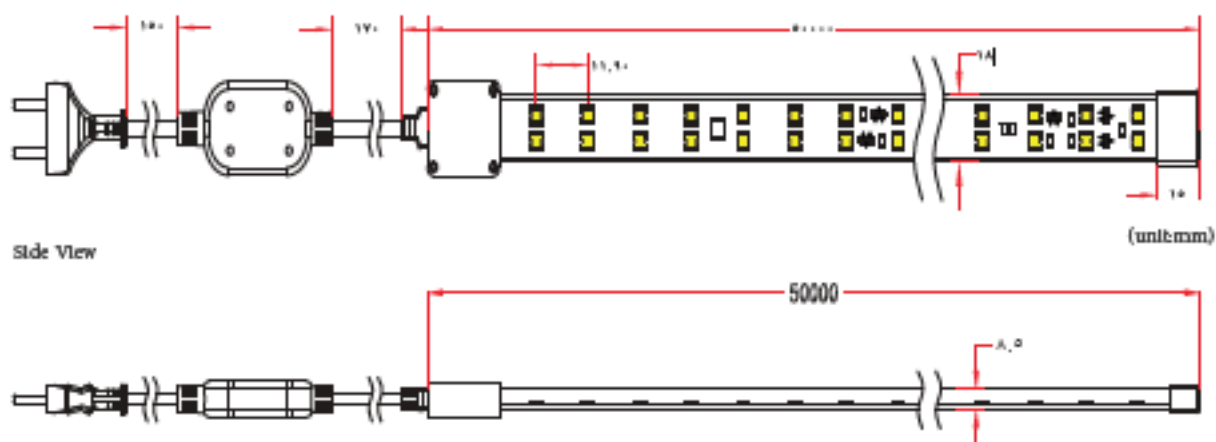

03 GENERAL PRODUCT DESCRIPTION

High-density double-row LED strip light delivering a powerful 11W per meter of bright The transparent silicone coating provides IP-54rated protection against dust and moisture splashes, making it equally at home in indoor and semi-outdoor applications with outstanding long-term durability. Fully cuttable and dimmable for complete design flexibility, CRI >80 for rich and accurate color rendering, rated for 50,000 hours and backed by a -5year warranty

04 FEATURES

uniform illumination with an ultra-high LED count that eliminates hotspots and ensures a smooth, seamless ribbon of consistent light across every centimeter.

05	TECHNICAL DATA	Input Voltage 24 VdC Frequency 50/60 Hz Power factor 90% CCT 2700K, 3000K , 3500K , 4000K, 5000K , 6000K CRI 80% -90% Wattage 11W/M LUMEN ≈900 Lm/M Power supply Tridonic / Nassli LED Type Epistar Materials PC, & Eco-Friendly material Beam Angle 120° Life Time >50,000 Hour Operating Temp -20°C to +55°C Storage Temp -40°C to +85°C Certifications CE, SELV and ISO Mounting in profile/hidden IP Rating IP54 Dimmable On&Of / Phase cut / 0-10V / Dali Emergency On Request Warranty 5 Years
-----------	----------------	---

06 APPLICATIONS

cove lighting, cabinet underlighting, retail shelving, hospitality interiors, staircases, and any architectural accent application.

