LED WALL WASHER LIGHT

Data Sheet Documents

-

IP
65

5Y
WAR


CRI
>80 / >90

50.000
HOURS





01	ORDER CODE	• NSL-WW-100-18W-XXK-HIP-XD-DON-IP65
02	DIMENSIONS	• W: 40, H: 37, L: 1000
01	ORDER CODE	• NSL-WW-120-36W-XXK-HIP-XD-DON-IP65
02	DIMENSIONS	• W: 40, H: 37, L: 1200

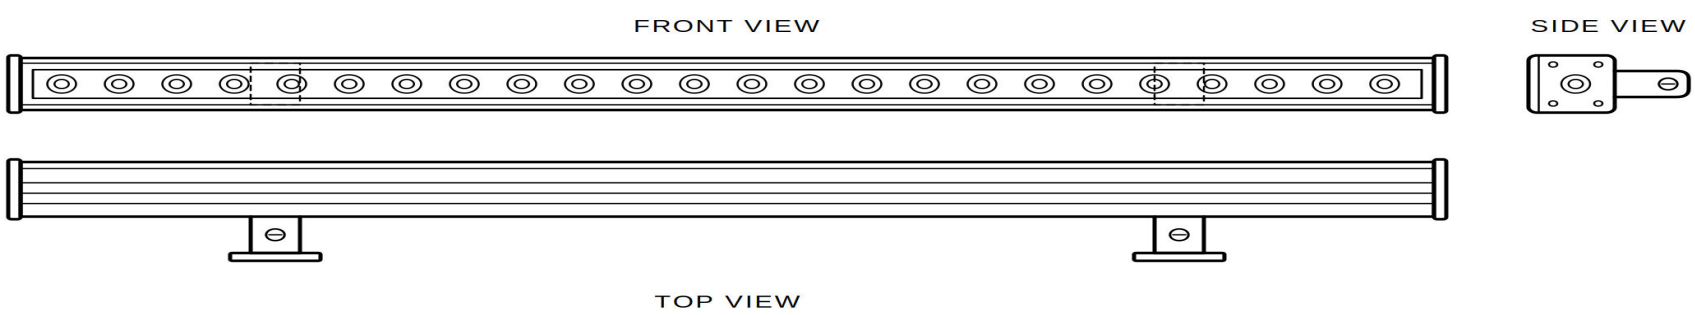

03 GENERAL PRODUCT DESCRIPTION

Precision LED wall washer light available in 18W and 36W, engineered to bathe entire building facades, walls, and architectural surfaces. Robust IP65-rated aluminum body ensures outstanding durability in all outdoor conditions.CRI >80/>90 for rich, accurate color rendering, rated for 50,000 hours and backed by a 5 years warranty.

04 FEATURES

Seamless flood of uniform light that eliminates dark spots and reveals every architectural detail with stunning clarity. The slim linear bar housing with precision individual lens optics delivers a perfectly controlled wide-angle wash beam with exceptional uniformity from end to end.

05 TECHNICAL DATA


Input Voltage	220-240 VAC 50/60 Hz
wattage	18W / 36 W
Power Factor	>80%
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80%
Lumen	2160Lm - 4320 Lm
Power supply	NASSLI
LED Type	Osram / Bridgelux
Materials	DIE- CAST ALUMINUIM HOUSING, PC LENS, GLASS DIFFUSER
Beam Angle	15˚..120˚symmetricaland asymmetrical
Life Time	>50,000 Hour
Operating Temp	-20˚C to +55˚C
Storage Temp	-40˚C to +85˚C
Certifications	CE, SELV and ISO
Mounting	On Ground/ Wall Mounted
IP Rating	IP65
Dimmable	On&Off / Phase cut / 0-10V / Dali
Emergency	N/A
Warranty	5 Years

06 APPLICATIONS

curved facades, hospitality interiors, retail environments, landscape features.



07 PHOTOMETRIC DATA

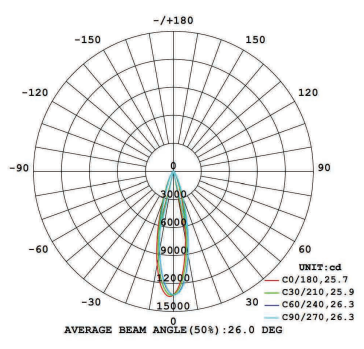

18 W