

LED WALL WASHER LIGHT

Data Sheet Documents


IP
65

5Y
WAR


CRI
>80 / >90

50.000
HOURS



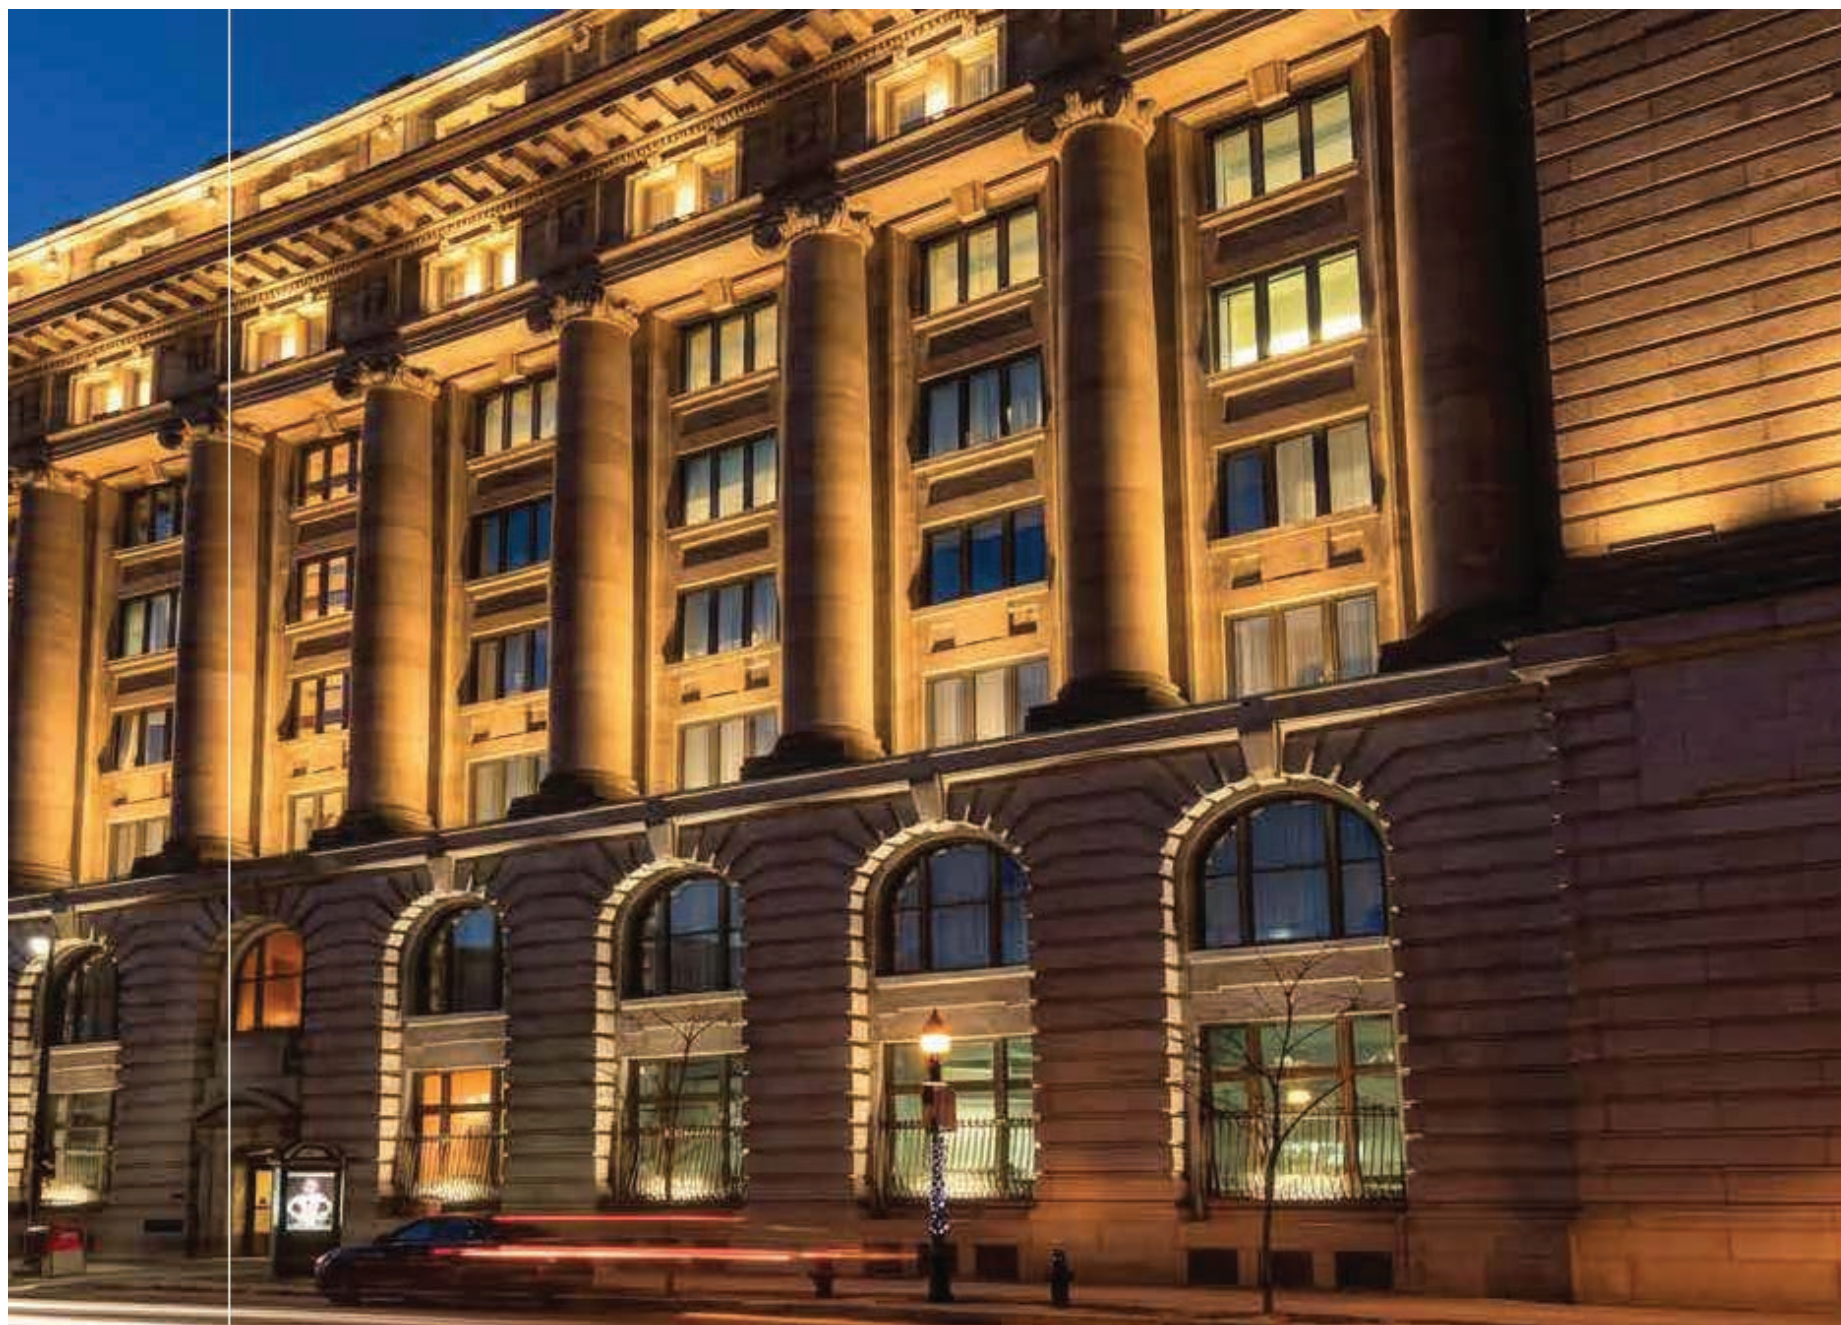

01	ORDER CODE	• NSL-WW-100-18W-XXK-HIP-XD-DON-IP65
02	DIMENSIONS	• W: 40, H: 37, L: 1000
01	ORDER CODE	• NSL-WW-120-36W-XXK-HIP-XD-DON-IP65
02	DIMENSIONS	• W: 40, H: 37, L: 1200

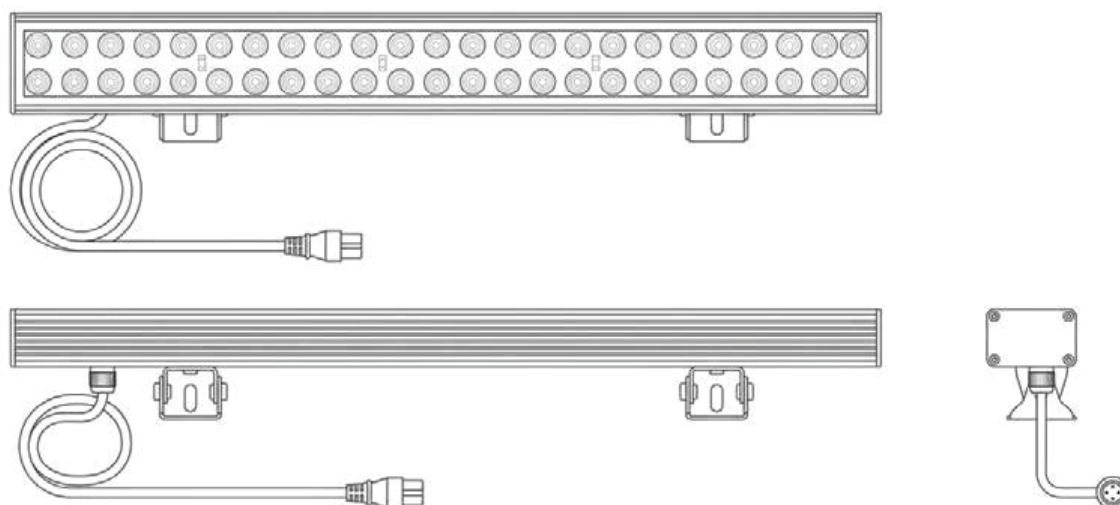

03	GENERAL PRODUCT DESCRIPTION	Precision LED wall washer light available in 18W and 36W, engineered to bathe entire building facades, walls, and architectural surfaces. Robust IP65-rated aluminum body ensures outstanding durability in all outdoor conditions. CRI >80/>90 for rich, accurate color rendering, rated for 50,000 hours and backed by a 3 years warranty.	
04	FEATURES	Seamless flood of uniform light that eliminates dark spots and reveals every architectural detail with stunning clarity. The slim linear bar housing with precision individual lens optics delivers a perfectly controlled wide-angle wash beam with exceptional uniformity from end to end.	
05	TECHNICAL DATA	Input Voltage	110-240 VAC 50/60 Hz
		wattage	18W / 36 W
		Power Factor	>80%
		CCT	2700K, 3000K, 4000K, 6000K
		CRI	>80%
		Lumen	2160Lm - 4320 Lm
		Power supply	NASSLI
		LED Type	Osram / Bridgelux
		Materials	DIE- CAST ALUMINIUM HOUSING, PC LENS, GLASS DIFFUSER
		Beam Angle	15°..120°symmetricaland asymmetrical
		Life Time	>50,000 Hour
		Operating Temp	-20°C to +55°C
		Storage Temp	-40°C to +85°C
		Certifications	CE, SELV and ISO
		Mounting	On Ground/ Wall Mounted
		IP Rating	IP65
		Dimmable	On&Of / Phase cut / 0-10V / Dali
		Emergency	N/A
		Warranty	5 Years

06 APPLICATIONS curved facades, hospitality interiors, retail environments, landscape features.



General
Lighting



Football
Field



Street
Lamp



Factory
Lighting



Green
House



Industrial
Area




Car
Park



Ware
house

07 PHOTOMETRIC
DATA

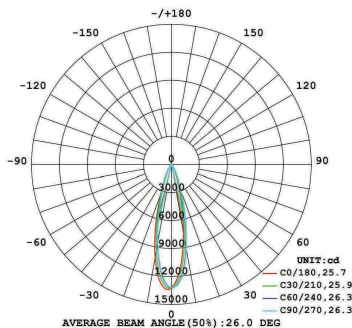

18 W