


Manufacturing is a design practice that works alongside those with a passion for design and production

WATER PROOF LED TUBE WITH PCB

IP 65 5Y WAR Watt 40-50 CRI >80 50,000 HOURS

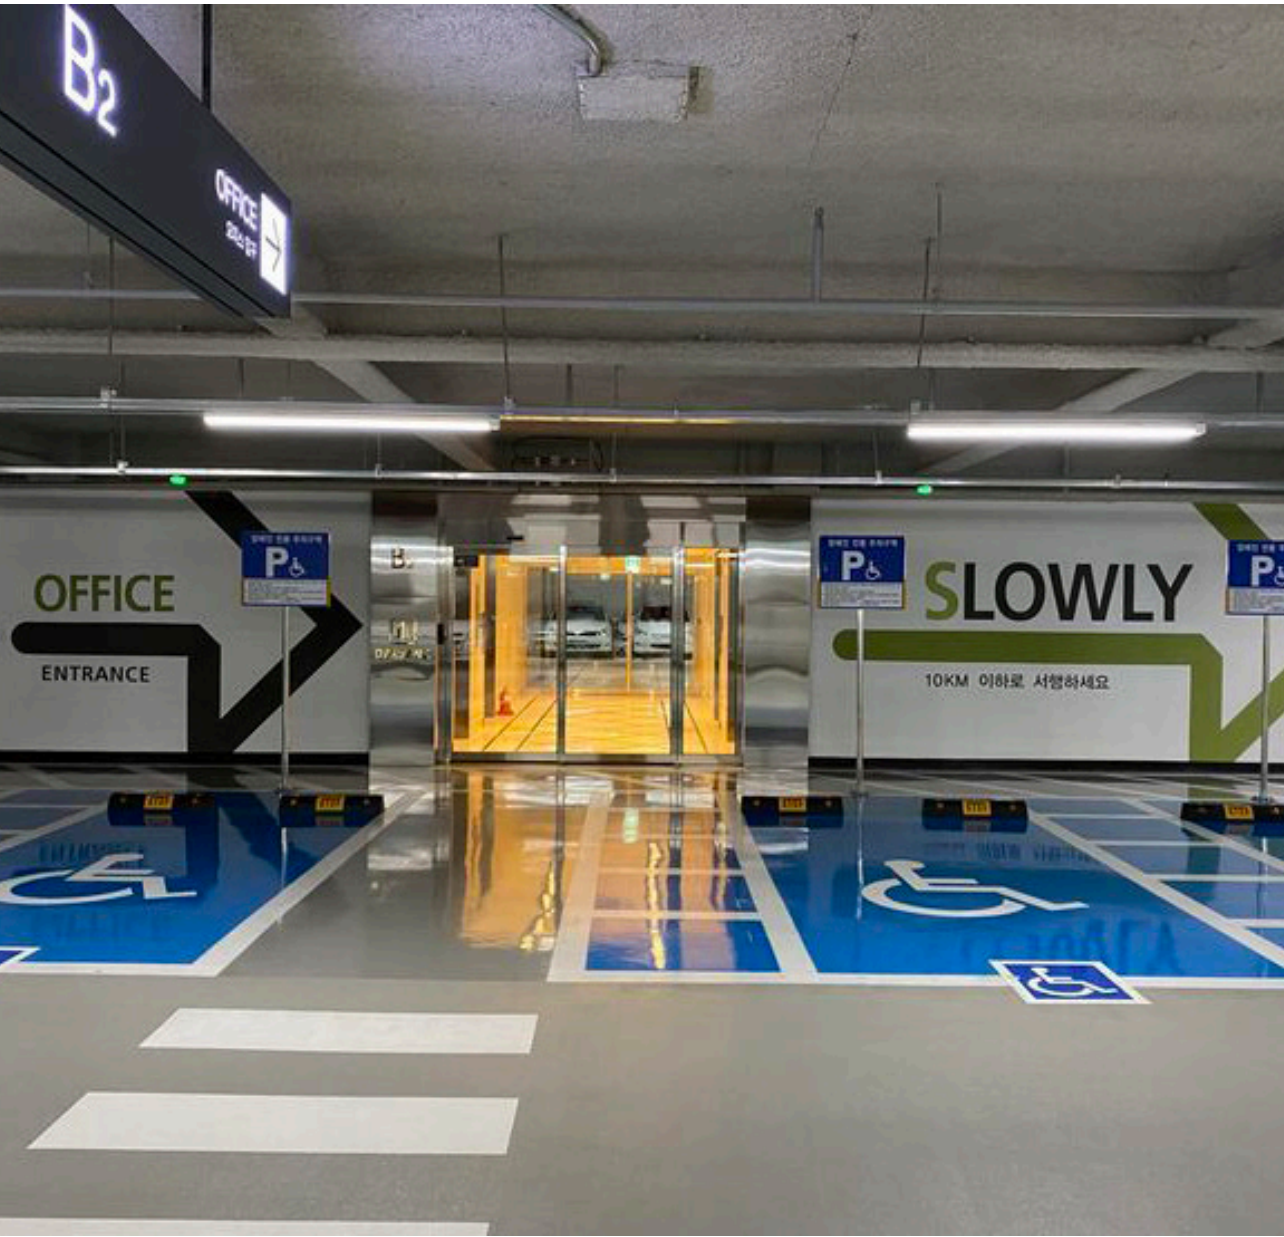

Manufacturing is a design practice that works alongside those with a passion for design and production



Application

It can be widely used for Trade Shows, Supermarkets, Schools, Hospitals, Factories, Car Parking, Airport, Corridor etc....

Feature

LED ceiling light: The LED diffuser light is mounted directly on the ceiling for plaster ceiling mounting.

The LED moisture-proof diffuser light is already completely wired for LED technology and does not have to be converted.

Operating temperature -20°C to 65°C, low heat generation:

Temperature heat sink >1h max. approx. 45°C Robust plastic housing and protection class IP65 prevent penetration of foreign bodies or dust as well as protection against water jets.

Product Details

Input Voltage	220 - 240 V AC
Frequency:	50/60Hz
Power Factor	>98%
CCT	3000K, 4000K, 5000K, 6000K
CRI	>80%
LED Efficiency	120-130lm/W
Power Supply	Tridonic / Nassli
LED Type	Osram / Bridgelux
Materials	Aluminum, PC, & Friendly material
Beam Angle	160°
Life Time	>50,000 Hour
Operating Temp	-20°C to +55°C
Storage Temp	-40°C to +85°C
Certifications	CE, SELV and ISO
Mounting	Wall mounting, Surface
IP Rating	IP65
Mech. Impact Protection:	IK07
Dimmable:	On Request
Emergency	On Request
Warranty	5 Years

Power (Watt)	Dimensions	Lumen
40W	L1267 x W125 x H85	4400
Order Code	NSL-WP-PCB-2x120-40W-XXK-SMD-NS-IP65	
Order Code	NSL-WP-PCB-2x120-40W-XXK-SMD-TD-XX-IP65	

Power (Watt)	Dimensions	Lumen
50W	L1267 x W125 x H85	5500
Order Code	NSL-WP-PCB-2x120-50W-XXK-SMD-NS-IP65	

Power (Watt)	Dimensions	Lumen
25W	L1267 x W125 x H85	2750
Order Code	NSL-WP-PCB-1x120-25W-XXK-SMD-NS-IP65	
Order Code	NSL-WP-PCB-1x120-25W-XXK-SMD-TD-XX-IP65	

Power (Watt)	Dimensions	Lumen
18W	L1267 x W125 x H85	1980
Order Code	NSL-WP-PCB-1x120-18W-XXK-SMD-NS-XX-IP65	

Power (Watt)	Dimensions	Lumen
20W	L1267 x W125 x H85	2200
Order Code	NSL-WP-PCB-1x120-20W-XXK-SMD-NS-XX-IP65	
Order Code	NSL-WP-PCB-1x120-20W-XXK-SMD-TD-XX-IP65	

Power (Watt)	Dimensions	Lumen
22W	L1267 x W125 x H85	2420
Order Code	NSL-WP-PCB-1x120-22W-XXK-SMD-NS-XX-IP65	

Power (Watt)	Dimensions	Lumen
22W	L667 x W125 x H85	2420
Order Code	NSL-WP-PCB-2x60-22W-XXK-SMD-NS-IP65	

Power (Watt)	Dimensions	Lumen
11W	L667 x W95 x H85	1210
Order Code	NSL-WP-PCB-1x60-11W-XXK-SMD-NS-IP65	
Order Code	NSL-WP-PCB-1x60-11W-XXK-SMD-TD-XX-IP65	

Power (Watt)	Dimensions	Lumen
60W	L1567 x W125 x H85	6600
Order Code	NSL-WP-PCB-2x150-60W-XXK-SMD-NS-IP65	
Order Code	NSL-WP-PCB-2x150-60W-XXK-SMD-TD-XX-IP65	

Power (Watt)	Dimensions	Lumen
30W	L1567 x W95 x H85	3300
Order Code	NSL-WP-PCB-1x150-30W-XXK-SMD-NS-IP65	
Order Code	NSL-WP-PCB-1x150-30W-XXK-SMD-TD-XX-IP65	